



Exam : 1Z0-043

Title : Oracle Database 10g: Administration II ☐☐☐☐☐☐

☐☐☐☐☐☐☐☐

☐

☐☐☐☐

☐☐

Ver : 02.16.2006

QUESTION 1:

You observe that a database performance has degraded over a period of time. While investigating the reason, you find that the size of the database buffer cache is not large enough to cache all the needed data blocks.

Which advisory component would you refer to, in order to determine that required size of the database buffer cache?

- A.Memory Advisor
- B.Segment Advisor
- C.SQL Tuning Advisor
- D.SQL Access Advisor
- EAutomatic Database Diagnostic Monitor (ADDM)

Answer: A

QUESTION 2:

Exhibit

```
SQL> SELECT event, total_waits, time_waited, time_waited_micro
2 FROM v$system_event
3 WHERE event like '%log file%';
```

EVENT	TOTAL_WAITS	TIME_WAITED	TIME_WAITED_MICRO
log file sequential read	4	1	6229
log file single write	4	0	1192
log file parallel write	1113	378	2734803
log file bytes	475	176	1762957

```
SQL> SELECT group#, member FROM v$logfile;
```

GROUP#	MEMBER
1	/u01/app/oracle/oradata/orcl/redo01a.log
1	/u01/app/oracle/oradata/orcl/redo01b.log
2	/u01/app/oracle/oradata/orcl/redo02a.log
2	/u01/app/oracle/oradata/orcl/redo02b.log
3	/u01/app/oracle/oradata/orcl/redo03a.log
3	/u01/app/oracle/oradata/orcl/redo03b.log

```
SQL> SELECT group#, bytes, members FROM v$log;
```

GROUP#	BYTES	MEMBERS
1	10485760	2
2	10485760	2
3	10485760	2

In your production database, the total waits and the time waited for log file parallel write are significantly high. While investigating the reason, you find that there are three redo log groups with two members in each group, and all redo log members are places on a single physical disk.

What action would you take to minimize the waits?

- A.start the log writer slave processes
- B.increase the number of redo log files
- C.increase the size of the redo log buffer
- D.place the redo log files on the different disks
- E.increase the number of log writer processes

Answer: D

QUESTION 3:

One of the tablespaces is read-only in your database. The loss of all control files forced you to re-create the control file.

Which operation do you need to perform after re-creating the control file and opening the database?

- A.drop and re-create the read-only tablespaces
- B.rename the read-only data files to their correct file names
- C.change the tablespace status from read/write to read-only
- D.re-create the read-only tablespace because it is automatically removed

Answer: B

QUESTION 4:

You have set some of the initialization parameters as:

DB_BLOCK_SIZE = 8KB

SGA_MAX_SIZE = 2GB

SGA_TARGET = 0

SHARED_POOL_SIZE = 120MB

DB_CACHE_SIZE = 896MB

STREAM_POOL_SIZE = 0

LARGE_POOL_SIZE = 110 MB

Which two statements are correct? (Choose two.)

- A.You cannot set a value for theDB_8K_CACHE_SIZEparameter.
- B.If you increase the size of the large pool to 120 MB, then the memory allocated to the shared poll will be reduced to 110 MB.
- C.If the value forSGA_TARGETis changed to 1 GB andSHARED_POOL_SIZEis set to 120 MB, then memory cannot be taken from the shared pool, even if the shared pool has free space available.
- D.If an application attempts to allocate more than 120 MB from the shared pool and free space is available in the buffer pool, then the free space from the buffer pool is allocated to the shared pool.

Answer: A, C

QUESTION 5:


You are performing a block media recovery on thetools01.dbfdata file in theSALESdatabase using RMAN. Which two statements are correct in this scenario? (Choose two.)

- A.You must ensure that the SALES database is mounted or open.
- B.You must restore a backup control file to perform a block media recovery.
- C.You must take thetools01.dbfdata file offline before you start a block media recovery.
- D.You must put the database inNOARCHIVELOGmode to perform a block media recovery.
- E.You can perform only a complete media recovery of individual blocks, point-in-time recovery of individual data blocks is not supported.

Answer: A, E

QUESTION 6:

Exhibit

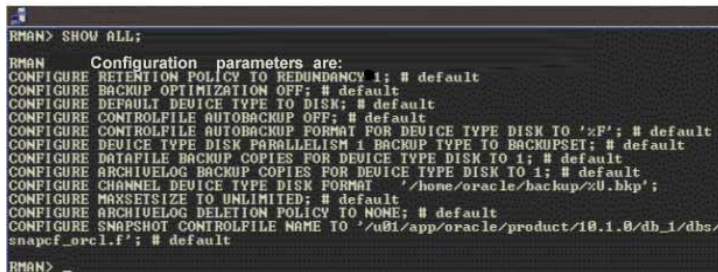

```
RMAN> SHOW ALL;  
RMAN Configuration parameters are:  
CONFIGURE RETENTION POLICY TO REDUNDANCY 1; # default  
CONFIGURE BACKUP OPTIMIZATION OFF; # default  
CONFIGURE DEFAULT DEVICE TYPE TO DISK; # default  
CONFIGURE CONTROLFILE AUTOBACKUP OFF; # default  
CONFIGURE CONTROLFILE AUTOBACKUP FORMAT FOR DEVICE TYPE DISK TO '%F'; # default  
CONFIGURE DEVICE TYPE DISK PARALLELISM 1 BACKUP TYPE TO BACKUPSET; # default  
CONFIGURE DATAFILE BACKUP COPIES FOR DEVICE TYPE DISK TO 1; # default  
CONFIGURE ARCHIVELOG BACKUP COPIES FOR DEVICE TYPE DISK TO 1; # default  
CONFIGURE CHANNEL DEVICE TYPE DISK FORMAT '/home/oracle/backup/%U.bkp';  
CONFIGURE MAXSETSIZE TO UNLIMITED; # default  
CONFIGURE ARCHIVELOG DELETION POLICY TO NONE; # default  
CONFIGURE SNAPSHOT CONTROLFILE NAME TO '/u01/app/oracle/product/10.1.0/db_1/dbs/  
snapcf_orcl.f'; # default  
RMAN>
```

You executed the following command to perform a backup of the USERStablespace:

RMAN>BACKUP TABLESPACE USERS;

Which type of backup would this command perform?

- A.backup set
- B.image copy
- C.incremental backup
- D. None; the user receives an error indicating that the backup must be specified.

Answer: A

QUESTION 7:

In your database, online redo log files are multiplexed and one of the members in a group is lost due to media failure?

How would you recover the lost redo log member?

- A.import the database from the last export
- B.restore all the members in the group from the last backup
- C.drop the lost member from the database and then add a new member to the group
- D.restore all the database files from the backup and then perform a complete recovery
- E.restore all the database files from the backup and then perform an incomplete recovery

Answer: C

QUESTION 8:

You are using Oracle Database 10g. Which statement regarding an incomplete recovery is true?

- A.You do not need to restore all the data files.
- B.You do not need to open the database with the RESETLOGS operation
- C.You do not need to perform a full backup after the RESETLOGS operation.
- D.You do not need to recover all the data files to the same system change number (SCN).

Answer: C

QUESTION 9:

Exhibit

Edit Resource Plan: SYSTEM_PLAN

General **Group Switching** **Idle Time** **Session Switching** **Idle Time** **Group Switching** **Idle Time**

Plan **SYSTEM_PLAN**

Description

Activate this plan ☐

Selected Groups/Subplans

Group/Subplan	Level 1	Level 2	Level 3	Level 4	Level 5	Level 6	Level 7	Level 8
LOW_GROUP	10	0	100	0	0	0	0	0
OTHER_GROUPS	0	100	0	0	0	0	0	0
SYS_GROUP	90	0	0	0	0	0	0	0

Modify

View the Exhibit and examine the Resource Manager settings for the groups at different levels.

Which two effects would be the result of this setting? (Choose two.)

- A. The members of LOW_GROUP would get more priority than those of OTHER_GROUPS.
- B. The members of SYS_GROUP would get most of the CPU allocation at level 1.
- C. The members of LOW_GROUP would get most of the CPU allocation because it has CPU allocation at two different levels.
- D. The members of LOW_GROUP would get no CPU allocation at level 1 if the members of OTHER_GROUPS are using all the CPU at level 2.
- E. The members of SYS_GROUP would get no CPU allocation at level 1 if the members of OTHER_GROUPS are using all the CPU at level 2.

Answer: A, B

QUESTION 10:

The current time zone for one of the user sessions is set to the database local time zone. For one application, the user session requires the time zone to be set to the local operating system time zone without affecting other user sessions.

Which two solutions could the user implement to achieve this objective? (Choose two.)

- A. use the ALTER SYSTEM command to change the time zone
- B. use the ALTER SESSION command to change the time zone
- C. use the ALTER DATABASE command to change the time zone
- D. set the value for the operating system variable ORA_SDTZ on the client machine
- E. set the value for the operating system variable ORA_SDTZ on the database server machine

Answer: B, D

QUESTION 11:

You work as a database administrator at Certkiller .com. Your database is open and running in ARCHIVELOG mode. You take RMAN full backups every Sunday night. On Monday morning, while querying the user1.employee table, you receive the following error message:

01578: ORACLE data block corrupted (file # 5, block # 51) ORA-01110: data file 5: '/u01/app/oracle/oradata/orcl/example01.dbf'

You need to rectify the corruption while ensuring the following:

The data file should remain online.

The mean time to recover (MTTR) should be minimal.

You are not using a backup control file and all the archived logs are accessible. Which option would you choose?

- A.flash back the corrupted blocks
- B.use theDBMS_REPAIRpackage
- C.use the RMAN TSPITR command
- D.use the RMAN BLOCK RECOVER command
- E.use the RESTORE DATABASE and RECOVER DATABASE commands
- F.investigate the time at which the corruption occurred and perform a point-in-time recovery

Answer: D

QUESTION 12:

You are working on an Oracle Database 10g database. You enabled the Flashback Database feature. Which two statements regarding flashback logs are true? (Choose two.)

- A.Flashback logs are not archived.
- B.Flashback logs are maintained in redo log files.
- C.Flashback logs are maintained in the Flash Recovery Area.
- D.Flashback logs are used to maintain Flashback Database related errors.
- E.Flashback logs need to be cleared manually after you disable Flashback Database.

Answer: A, C

QUESTION 13:

You executed the following query:

```
SELECT operation,undo_sql,table_name  
FROM flashback_transaction_query
```

Which statement is correct regarding the query output?

- A.It would return information regarding only the last committed transaction.
- B.It would return only the active transactions in all the undo segments in the database.
- C.It would return only the committed transactions in all the undo segments in the database.
- D.It would return both active and committed transactions in all the undo segments in the database.
- E.It would return information regarding the transactions that began and were committed in the last 30 minutes.

Answer: D

QUESTION 14:

Consider the following configuration:

/devices/D1 is a member of disk group groupA.

/devices/D2 is a member of disk group groupA.

/devices/D3 is a member of disk group groupA.

You plan to add a new disk, /devices/D4, to the disk group groupA.

You execute the following command:

```
SQL> ALTER DISKGROUP groupA ADD DISK '/devices/D*';
```

Which task would be accomplished by the command?

- A.The command adds the new disk,D4, to the disk group.
- B.The command would result in an error because there is no disk by the name"/devices/D*"
- C.The command will be ignored because disks starting with "D" are already members of the disk group.
- D.The command would result in an error because no wildcard characters can be used in the disk name.
- E.The command first detaches all the member disks starting with "D", and then reattaches them including the new disk.

Answer: A

QUESTION 15:

You work as a database administrator at Certkiller .com. In your production database there is a job, CALC_STAT, which has been scheduled to run every Friday at 5.00 p.m.CALC_STAT updates the optimizer statistics for the objects owned by the APPS schema. You want the task to be generic, thereby allowing users to modify the attributes of the task at run time without affecting the original task. Which component of Oracle Scheduler must you define to achieve this?

- A.Window
- B.Program
- C.Job class
- D.Window group

Answer: B

QUESTION 16:

Immediately after adding a new disk to or removing an existing disk from an Automatic Storage Management (ASM) instance, you find that the performance of the database decreases initially, until the addition or removal process is completed. Performance then gradually returns to normal levels. Which two activities could you perform to maintain a consistent performance of the database while adding or removing disks? (Choose two.)

- A.increase the number of checkpoint processes
- B.define the POWER option while adding or removing the disks
- C.increase the number of DBWR processes by setting up a higher value for DB_WRITER_PROCESSES
- D.increase the number of slave database writer processes by setting up a higher value for DBWR_IO_SLAVES
- E.increase the number of ASM Rebalance processes by setting up a higher value for ASM_POWER_LIMIT during the disk addition or removal

Answer: B, E

QUESTION 17:

The current time is 12:00 noon. You want to recover the USER tablespace from a failure that occurred at 11:50 a.m. You discover that the only member of an unarchived redo log group containing information from 11:40 a.m. onwards is corrupt.

With reference to this scenario, if you are not using Recovery Manager (RMAN), which recovery method

would you use?

- A.time-based recovery
- B.log sequence recovery
- C.cancel-based recovery
- D.change-based recovery

Answer: C

QUESTION 18:

You lost thePRODSTDtablespace, which was read/write. The tablespace was read-only when the last backup was performed. How would you recover the tablespace?

- A. restore the tablespace from the backup; there is no need to apply the redo information
- B. restore the full database to recover the data up to the point when you performed the backup
- C. restore the tablespace from the backup and then perform a recovery using the backup control file
- D. restore the tablespace from the backup and then recover the tablespace; all the redo information from the point when the tablespace was made read/write is applied

Answer: D

QUESTION 19:

You are using an Automatic Storage Management (ASM) instance to manage the files of your production database. You have two disk groups,DG1andDG2with one device each.

In the parameter file of the production database, the following parameters have been specified:

DB_CREATE_ONLINE_LOG_DEST_1 = '+dg1'

DB_CREATE_ONLINE_LOG_DEST_2 = '+dg2'

What would be the impact of this setting?

- A.When a new log group is added, it would have one member in each disk group.
- B.When a new log group is added, it would have two members in each disk group.
- C.When a new tablespace is added, it would have one data file in each disk group.
- D.When a new log file is added, it would have one member spread across the disk groups.

Answer: A

QUESTION 20:

An RMAN backup job fails, displaying the following error:

ORA-19809: limit exceeded for recovery files

Your analysis shows that the Flash Recovery area is full. Which two actions could you take to resolve the error and avoid this error in the future? (Choose two.)

- A.take the backup of the flash recovery area less frequently
- B.increase the value of theUNDO_RETENTIONinitialization parameter
- C.change the value of theWORKAREA_SIZE_POLICYinitialization parameter toAUTO
- D.change the backup retention policy to retain the backups for a smaller period of time

- E.increase the value of theDB_RECOVERY_FILE_DEST_SIZEinitialization parameter
- F.increase the value of theCONTROL_FILE_RECORD_KEEP_TIMEinitialization parameter

Answer: D, E

QUESTION 21:

Your database operates inARCHIVELOGmode. User-managed consistent backups are performed every Sunday night.

On Tuesday, client A drops a table at8:00 a.m.as follows:

```
SQL> DROP TABLEcust_ordPURGE;
```

Table dropped.

Client B executes a query at9:00 a.m.on the same table as follows:

```
SQL> SELECT * FROMcust_ord
```

```
SELECT * FROMcust_ord
```

```
*
```

ERROR at line 1:

ORA-00942: table or view does not exist

Client B needs the dropped table and reports the problem to you.

With reference to this scenario, which action should you take?

- A.retrieve the table by using the flashback feature
- B.restore all the data files from last Sunday's backup and then perform a time-based recovery
- C.restore all the data files from last Sunday's backup and then perform a log sequence recovery
- D.restore all the data files from last Sunday's backup and then perform a cancel-based recovery
- E.restore from last Sunday's backup only data files that belong to the tablespace in which the table was stored and then perform a complete recovery

Answer: B

QUESTION 22:

You performed an incomplete recovery on your Oracle Database 10g database using the following command:

```
SQL> RECOVER DATABASE
```

```
2 UNTIL TIME '2004-08-05:12:10:03'
```

```
3 USING BACKUP CONTROLFILE;
```

In which situation would the above recovery be required?

- A.A user table was lost at the specified time.
- B.A redo log file was lost at the specified time.
- C.The backup control file is on a faster disk than the current one.
- D.The current control file has a different path compared with the intended time of recovery.
- E.The current control file does not match the physical structure of the database at the intended time of recovery.

Answer: E

QUESTION 23:

While creating a job class using the DBMS_SCHEDULER package, you set the logging level to LOGGING_RUNS. What would be the impact of this setting?

- A. Oracle Scheduler would write detailed information to the job log for each run of each job in the job class.
- B. Oracle Scheduler would write detailed information to the job log for the first run of each job in the job class.
- C. Oracle Scheduler would write detailed information to the job log for each run of only the first job in the job class.
- D. Oracle Scheduler would write detailed information for all operations performed on all jobs in the job class.

Answer: A

QUESTION 24:

You are designing an application for Certkiller .com and you have been asked to design a database table to facilitate monthly bill generation. The bill would include details of customer calls, listed in chronological order.

Which method would you follow to achieve this objective without increasing the overhead of sorting the rows?

- A. create a hash cluster to store the data
- B. create an index cluster to store the data
- C. create a partitioned table to store the data
- D. create a sorted hash cluster to store the data
- E. create a heap table with rowid to store the data

Answer: D

QUESTION 25:

You set the recovery window to seven days and the backup optimization to ON using the CONFIGURE command of Recovery Manager (RMAN). The most recent backup of the TOOLS tablespace to disk was taken on January 3. The TOOLS tablespace is read-only.

On February 21, when you execute a command to back up all the tablespaces to disk, you find that RMAN backs up the TOOLS tablespace also, even though the contents of the tablespace have not changed after the backup on January 3.

Because there are no changes made to the TOOLS tablespace, you decide that the tablespace should not be backed up by RMAN. What can you do to skip backing up the TOOLS tablespace without changing the current backup optimization setting?

- A. configure a default device for RMAN backups
- B. temporarily disable the retention policy for RMAN backups
- C. configure automatic channel allocation for RMAN backups
- D. use the CONFIGURE command to reconfigure the recovery window to 60 days

Answer: D

QUESTION 26:

You want to configure the Flashback Database feature and retain flashback logs for three days.

The steps used in this process are:

A. Set the retention target:

SQL>ALTER SYSTEM SET DB_FLASHBACK_RETENTION_TARGET=4320;

B. Enable Flashback Database:

SQL>ALTER DATABASE FLASHBACK ON;

C. Mount the database:

SQL> STARTUPMOUNTEXCLUSIVE

D. Shut down the instance:

SQL> SHUTDOWN IMMEDIATE;

E. Open the database:

SQL> ALTER DATABASE OPEN;

In what sequence would you need to perform these steps to enable the Flashback Database feature?

A.D, C, A, D, E

B.D, A, C, B, E

C.B, D, C, E, A

D.D, B, E, C, A

Answer: A

QUESTION 27:

In which scenarios would you rebuild an index? (Choose all that apply.)

A. when you need to disable the index usage

B. when you need to change storage options

C. when you need to enable index monitoring

D. when you need to move the index to another tablespace

Answer: B, D

QUESTION 28:

You enabled Automatic Shared Memory Management. The initialization parameters are set as shown below:

SGA_TARGET= 10GB

SGA_MAX_SIZE = 14GB

STREAMS_POOL_SIZE = 1GB

SHARED_POOL_SIZE = 3GB

Which two statements are correct in this scenario? (Choose two.)

A. A maximum of 3 GB can be allocated to shared pool.

B. The value forSGA_TARGETcan be increased up to a maximum of 15 GB.

C. A total of 14 GB memory will be allocated to the automatically tuned memory components.

D. Increasing the value forSGA_TARGETwill automatically increase the memory allocated for STREAMS_POOL_SIZE.

E.Increasing the value forSGA_TARGETto 12 GB will automatically increase the memory allocated to autotunedparameters.

F.Reducing the value forSGA_TARGETto 9 GB will automatically decrease the memory allocated to shared pool from 3 GB to 2 GB.

Answer: B, E

QUESTION 29:

Which statement correctly describes the change tracking writer (CTWR) background process?

A.It keeps track of changes in the background processes.

B.It records the system change number (SCN) in the control file.

C.It writes audit records for user changes to the change tracking file.

D.It records any changes to the listened configuration in thelistener.orafile.

E.It records any changes to the database parameters in the change tracking file.

F.It records the physical location of all the changes that are made to the database in the change tracking file.

Answer: F

Explanation:

Subject: New Background Processes In 10g

Doc ID: Note:268197.1 Type: HOWTO

Last Revision Date: 18-JUL-2005 Status:

PUBLISHED

CTWR

=====

This is a new process Change Tracking Writer (CTWR) which works with the new block changed tracking features in 10g for fast RMAN incremental backups.

Subject: RMAN 10g : How To Size the Block Change Tracking File

Doc ID: Note:306112.1 Type: HOWTO

Last Revision Date: 22-MAY-2005 Status: REVIEWED

The information in this document applies to:

Oracle Server - Enterprise Edition - Version: 10.1.0.0 to 10.2.0.0

Information in this document applies to any platform.

Goal

This is a clarification of the documentation for sizing the Block Change Tracking File.

Block Change Tracking is used to optimize incremental backups. A new file is introduced:

- Changed blocks are tracked by the CTWR background process as redo is generated

- Database backups automatically use the change tracking file

Sizing of this file is important, and even though you can use

V\$BLOCK_CHANGE_TRACKING view

to monitor the usage, it may in some cases not be easy to change the size, ie when using raw devices.

QUESTION 30:

You work as a database administrator at Certkiller .com. In your production database, you observe that users' transactions are consuming a lot of resource and you plan to impose resource restrictions by using Resource Manager.

For which three resources can you enable usage restrictions by using Resource Manager? (Choose three.)

- A.CPU usage
- B.degree of parallelism
- C.number of open cursors
- D.number of sorts performed
- E.idle time for blocking sessions
- F.number of disk I/O operations performed
- G.number of memory I/O operations performed

Answer: A, B, E

QUESTION 31:

You have specified the warning and critical threshold values of an application tablespace to be 60% and 70% respectively. From the tablespace space usage metrics, you find that the actual space usage has reached the specified warning threshold value, but no alerts have been generated.

What could be the reason for this?

- A.TheEVENTparameter was not set.
- B.TheSQL_TRACEparameter is set toFALSE.
- C.The Enterprise Manager Grid Control is not used.
- D.TheSTATISTICS_LEVELparameter is set toBASIC.
- E.TheTIMED_STATISTICSparameter is set toFALSE.

Answer: D

QUESTION 32:

You executed the following command in Recovery Manager (RMAN) against your Oracle 10g database:

RAMN>REPORT NEED BACKUP days 3;

What would be the output of this command?

- A.a list of files that require a backup within three days
- B.a list of files that have not been backed up for three days
- C.a list of files that RMAN recommends be backed up only once in every three days, based on low volatility
- D.a list of files for which a backup has already been performed and may need a backup after three days

Answer: B

QUESTION 33:

Your database operates in ARCHIVELOG mode. The redo log files are not multiplexed and one of the online redo logs is missing. The missing redo log sequence, 230, is not archived and it contained information from 10:35 a.m. onwards.

The current time is 11:00 a.m. Because of a disk crash, you executed the following command to perform an incomplete recovery:

```
RMAN> RUN {  
2> SET UNIT SEQUENCE 230 THREAD 1;  
3> ALTER DATABASE MOUNT;  
4> RESTORE DATABASE;  
5> RECOVER DATABASE;  
6> ALTER DATABASE OPEN RESETLOGS;  
7> };
```

With reference to this scenario, which statement is true?

- A. RMAN recovers up to log sequence 230, but not including 230.
- B. RMAN returns an error because the log sequence number mentioned in the command should be 229.
- C. RMAN returns an error because the log sequence number mentioned in the command may never be missing.
- D. RMAN recovers up to and including log sequence 229 but then returns an error because log sequence 230 is missing.

Answer: A

QUESTION 34:

In your database, all the tablespaces are locally managed. You started Recovery Manager (RMAN) using recovery catalog and restored the control file by using the following command:

```
RMAN> RESTORE CONTROLFILE;
```

Which two operations do you need to perform after restoring the control file from backup? (Choose two.)

- A. shut down and restart the instance
- B. add new tempfiles to the temporary tablespaces after recovery
- C. perform a media recovery and open the database with the RESETLOGS option
- D. perform a media recovery and bring the database to NOARCHIVELOG mode

Answer: B, C

QUESTION 35:

While designing your database, you have created the EMPLOYEE table as an index-organized (IOT). You want to create a bitmap index on the JOD_ID column to make queries faster.


Which task must have been completed so that you are able to create the bitmap index?

- A. A primary key must have been created.
- B. A mapping table must have been created.
- C. An overflow tablespace must have been specified.
- D. The PCTTHRESHOLD option must have been specified.

Answer: B

QUESTION 36:

Exhibit

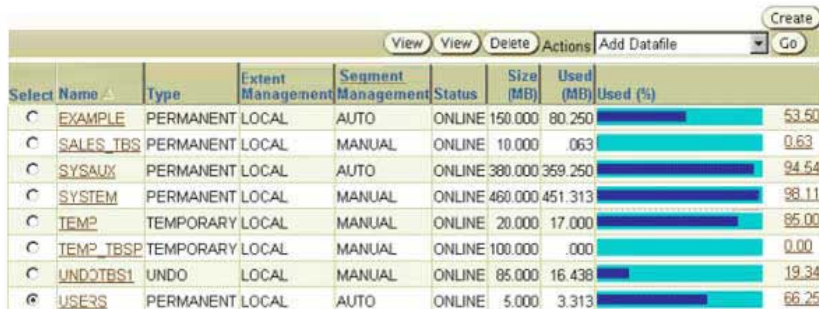

Select	Name	Type	Extent Management	Segment Management	Status	Size (MB)	Used (MB)	Used (%)
☒	EXAMPLE	PERMANENT	LOCAL	AUTO	ONLINE	150,000	80,250	53.50
☐	SALES_TBS	PERMANENT	LOCAL	MANUAL	ONLINE	10,000	.063	0.63
☐	SYSAUX	PERMANENT	LOCAL	AUTO	ONLINE	380,000	359,250	94.54
☐	SYSTEM	PERMANENT	LOCAL	MANUAL	ONLINE	460,000	451,313	98.11
☐	TEMP	TEMPORARY	LOCAL	MANUAL	ONLINE	20,000	17,000	85.00
☐	TEMP_Tbsp	TEMPORARY	LOCAL	MANUAL	ONLINE	100,000	.000	0.00
☐	UNDO_TBS1	UNDO	LOCAL	MANUAL	ONLINE	85,000	16,438	19.34
☒	USERS	PERMANENT	LOCAL	AUTO	ONLINE	5,000	3,313	66.25

One of the important tables in the USERStablespace was dropped and purged from the recycle bin at 9:00 a.m. You noticed this at 11:00 a.m. and you want to perform an incomplete recovery to recover the table. Which statement is true?

- A. You must recover all data files to the required system change number (SCN).
- B. You must recover all data files, except those that are offline, to the required SCN.
- C. You must recover all data files belonging to the USERStablespace to the required SCN.
- D. You cannot recover all data files because segment space management is performed manually for the undo tablespace.

Answer: B

QUESTION 37:

You work as a database administrator at Certkiller .com. Your production database uses an Automatic Storage Management (ASM) instance to manage its files. You want to add a new disk group to the ASM instance to manage the increased data load.

What action would you perform to include the new disk group in the ASM instance without causing any impact on the currently connected users?

- A. mount the new disk group in the ASM instance
- B. restart the ASM instance and the production database instance
- C. register the new disk groups in the production database instance
- D. restart the ASM instance without restarting the production database instance
- E. include the new disk group in the ASM_DISKSTRING parameter in the parameter file and restart the ASM instance

Answer: A

QUESTION 38:

The DB_BLOCK_CHECKING initialization parameter is set to TRUE. What would be the result of this setting on the data blocks being written to the datafiles, every time the DBWn writes?

- A. The Oracle database will check all data blocks by going through the data on each block, making sure the data

is self-consistent.

B.TheDBWnand the direct loader will calculate a checksum and store it in the cache header of every data block when writing it to disk.

C.The Oracle database will check data blocks belonging to theSYSTEMtablespace only, by going through the data on each block, making sure the data is self-consistent.

D.The Oracle database will check data blocks belonging to theSYSAUXtablespace only, by going through the data on each block, making sure the data is self-consistent.

E.The Oracle database will check data blocks in theSYSTEMandSYSAUXtablespaces only, by going through the data on each block, making sure the data is self-consistent.

Answer: A

QUESTION 39:

In your production database you want to use an Automatic Storage Management (ASM) instance to manage the database files.

Which option would you use to migrate the database files from a non-ASM instance to an ASM instance?

A.Oracle Migration Assistant

B.Recovery Manager (RMAN)

C.Oracle Data Pump Export and Import

D.conventional Oracle Export and Import

E.operating system utilities to copy the files to the ASM instance

Answer: B

QUESTION 40:

In the parameter file of your production database, theCONTROL_FILE_RECORD_KEEP_TIME parameter is set to 31. What would be the impact of this setting on the backup that is being performed by using Recovery Manager (RMAN)?

A.The backup would be retained on the media for 31 days.

B.The backup would be maintained in the recovery catalog for 31 days.

C.The backup metadata would be retained in the control file for 31 days.

D.The backup metadata would be maintained in the recovery catalog for 31 days.

EAutomatic backups of the control file will be retained in the flash recovery area for 31 days.

Answer: C

QUESTION 41:

You decided to change the location of the flash recovery area. You executed the following command:

```
ALTER SYSTEM SET DB_RECOVERY_FILE_DEST='+disk1' SCOPE=BOTH SID='*';
```

Which statement is true?

A.The location can be changed only if the flash recovery area is empty.

B.After executing the command, all new flash recovery area files will be created in the new location.

C.The command will generate an error because you cannot change the flash recovery area while the database is

open.

D.All the existing files in the flash recovery area will be moved to the new location and all new Flash Recovery Area files will be created in the new location.

Answer: B

QUESTION 42:

Exhibit

Flashback Versions Query Result				
Select	Flashback SCN	Flashback Timestamp	Transaction ID	Operation DEPARTMENT_ID
☐	2004376	Aug 12, 2004 5:31:41 AM	04001A00470D0000	INSERT 300
☒	2004343	Aug 12, 2004 5:31:17 AM	01000A0027080000	INSERT 290
☐	2004319	Aug 12, 2004 5:30:40 AM	04001E00470D0000	INSERT 280

A user has inserted wrong department data in theDEPT3table in theUSERStablespace. You use the Flashback Table functionality to rectify the erroneous inserts. While performing the recovery, you choose 2004343 as the Flashback SCN.

Which two statements are correct in this scenario? (Choose two.)

- A.Only the row with DEPARTMENT_ID 290 would be flashed back.
- B.The rows with DEPARTMENT_ID 290 and 300 would be flashed back.
- C.The rows with DEPARTMENT_ID 290 and 280 would be flashed back.
- D.You would have taken theUSERStablespace offline before starting the Flashback Table operation.
- E.You would have enabled row movement for theDEPT3table before starting the Flashback Table operation.

Answer: B, E

QUESTION 43:

Using Oracle Scheduler you have scheduled two jobs,JOB_AandJOB_B, to run at9:00 p.m.every Friday. You want both the jobs to use a single resource plan,WEEKEND_PLAN.

Which task must have already been performed to enable you to achieve this objective?

- A.A window must have been created with theWEEKEND_PLANresource plan.
- B.A program must have been created with theWEEKEND_PLANresource plan.
- C.A job class must have been created with theWEEKEND_PLANresource plan.
- D.A window group must have been created with theWEEKEND_PLANresource plan.

Answer: C

QUESTION 44:

Your database is running on the automatic Program Global Area (PGA) memory management and Shared Memory Management mode. You want to increase the memory available for the SQL work areas. What would you do?

- A.modify theHASH_AREA_SIZEinitialization parameter
- B.modify thePGA_AGGREGATE_TARGETinitialization parameter
- C.modify theWORK_AREASIZE_POLICYinitialization parameter
- D.increase the value of theSGA_TARGETinitialization parameter

- E.increase the value of theSGA_MAX_SIZEinitialization parameter
- F.increase the value of theSORT_AREA_SIZEinitialization parameter

Answer: B

QUESTION 45:

On Tuesday, a junior DBA dropped an important application user account, whose schema has important tables. You are asked to recover all the objects in the schema. On investigation, you find that the user account was dropped at 11:00 a.m. and Sunday's backup is the most recent backup.

Which flashback feature would you use?

- A.Flashback Drop
- B.Flashback Table
- C.Flashback Database
- D.Flashback Version Query
- E.Flashback Transaction Query

Answer: C

QUESTION 46:

are stopped because archiving cannot continue.

What would you do to solve the problem?

- A.clear the redo log group
- B.perform redo log file import
- C.perform an incomplete recovery
- D.perform a redo log recovery using Recovery Manager (RMAN)
- E.shut down the database and open the database in theNOARCHIVELOGmode

Answer: A

QUESTION 47:

You are working on an Oracle Database 10g database. Because of data loss, you decided to perform a Flashback Database operation using the following command:

```
SQL> FLASHBACK DATABASE TO TIME STAMP (SYSDATE - 5/24);
```

Which two statements are true? (Choose two.)

- A.SYSDATE should not be used with TIME STAMP.
- B.The database must have multiplexed redo log files.
- C.The database must be in the MOUNT state to execute the command.
- D.The database must be opened with the RESETLOGS option after the flashback operation.
- E.The entire database needs to be restored from the most recent backup before the flashback operation.

Answer: C, D

The database must be mounted in exclusive mode to issue the FLASHBACK

DATABASE command and must be opened with the RESETLOGS option when finished.

QUESTION 48:

You work as a database administrator at Certkiller .com. In your test database, you find that a user's session is executing a lot of SQL statements, resulting in the generation of a large number of trace files. While investigating the reason, you find that SQL trace has been enabled at the instance level. You want to disable SQL trace, remotely, only for that user session to reduce the volume of trace data being generated.

How do you achieve this objective?

- A.by setting theSQL_TRACEparameter toFALSEin the parameter file
- B.by usingDBMS_MONITOR.SESSION_TRACE_DISABLEto disable the tracing for the user session
- C.by setting theSQL_TRACEparameter toFALSEby using theALTER SYSTEMcommand in the user session
- D.by setting theSQL_TRACEparameter toFALSEby using theALTER SESSIONcommand in the user session

Answer: B

QUESTION 49:

You execute the following command to enable a session inresumablemode:

```
SQL> ALTER SESSION ENABLE RESUMABLE TIMEOUT 60;
```

What is the impact of a timeout on the statements being suspended?

- A.The statements remain suspended for at least 60 seconds.
- B.The statements are suspended for 60 seconds and then they are executed.
- C.The suspended statements error out if the problem is not rectified within 60 seconds.
- D.The statements are automatically suspended 60 seconds after an error is received, and then attempt to execute normally again.

Answer: C

QUESTION 50:

You are managing an Oracle Database 10g database that uses Oracle Managed Files (OMF). You enabled the block change tracking feature for the database.

Which statement regarding the change tracking file is true?

- A.One block change tracking file is created for each data file. By default, the file is created in DB_CREATE_FILE_DEST.
- B.One block change tracking file is created for each data file. By default, the file is created in BACKGROUND_DUMP_DEST.
- C.One block change tracking file is created for the database. By default, the file is created in DB_CREATE_FILE_DEST.
- D.One block change tracking file is created for the database. By default, the file is created in BACKGROUND_DUMP_DEST.

Answer: C

Oracle(r) Database Backup and Recovery Basics 4-23, Chapter 5, Page 23,24

QUESTION 51:

You want to use the SQL Tuning Advisor to generate recommendations for badly written SQL statements in your development environment. Which three sources can you select for the advisor to analyze? (Choose three.)

- A.Top SQL
- B.snapshots
- C.SQL Tuning sets
- D.index access path
- E.optimizer statistics
- F.materialized view logs

Answer: A, C, D

QUESTION 52:

The loss of which two types of files may require a recovery with the RESETLOGS option? (Choose two.)

- A.control files
- B.password file
- C.archived log files
- D.system-critical data files for which all the redo entries are present
- E.non-system-critical data files for which all the redo entries are present

Answer: A, C

QUESTION 53:

There was media failure and you need to check the data files for any block corruption. Which option would you use to create a report on any corruptions found within the database?

- A.the DBNEWID utility
- B.the DBVERIFY utility
- C.the ANALYZE command
- D.the RMAN REPORT command
- E.the RMAN CROSSCHECK command
- F.the CHECK_OBJECT procedure of the DBMS_REPAIR package

Answer: B

QUESTION 54:

You find that the execution time of reports in your data warehouse application is significantly high. You suspect the lack of indexes to be the reason for the degradation in performance.

Which advisory component would you refer to, in order to determine the appropriate indexes?

- A.Memory Advisor
- B.Segment Advisor
- C.SQL Access Advisor
- DAutomatic Workload Repository (AWR)
- EAutomatic Database Diagnostic Monitor (ADDM)

Answer: C

QUESTION 55:

You have created a resource plan,PROD_DB_PLAN, with the following consumer groups with the respective plan directives:

Consumer groupSALESwithCPU_P1as 60 andDEGREE_OF_PARALLELISMas 4.

Consumer groupMARKETwithCPU_P1as 20.

Consumer groupDEVwithCPU_P1as 20.

Consumer groupOTHERSwithCPU_P1as 0 andCPU_P2as 100.

Which two statements are correct in this scenario? (Choose two.)

- A.The maximum degree of parallelism for the members of the consumer groups is 4.
- B.The CPU allocation will always be equal for the consumer groupsMARKETandDEV.
- C.TheOTHERSconsumer group would get 100% of the CPU if there are unused level 1 CPU resources.
- D.TheSALESandMARKETconsumer groups would get 100% of the CPU if there are unused level 2 CPU resources.
- E.The maximum degree of parallelism for the members of the consumer groupSALESis 4 with no restriction for the remaining groups.

Answer: C, E

QUESTION 56:

A user executes a query on theEMPtable, which contains thousands of rows, to get details about employees in one of the departments. The user receives the following error:

```
SQL> SELECTenameFROMempWHEREdeptno=10 ORDER BYsal
```

```
SELECTenameFROMempWHEREdeptno=10 ORDER BYsal
```

ERROR at line 1:

ORA-01157: cannot identify/lock data file 201 - see DBWR trace file

ORA-01110: data file 201: '/u01/app/oracle/oradata/orcl/temp01.dbf'

What is a possible reason?

- A.Thetempfilebelonging to the default temporary tablespace is missing.
- B.The database is opened in restricted mode, so queries are not allowed
- C.The default temporary tablespace required to execute the query is offline.
- D.The default temporary tablespace required to execute the query is dropped.
- E.The default temporary tablespace required to execute the query is read-only.

Answer: A

QUESTION 57:

You executed the following command in Recovery Manager (RMAN):

RMAN> RESTORE CONTROLFILE;

Which operation must you perform before this command is executed?

- A.back up the control file to trace
- B.bring database to theMOUNTstate
- C.open a connection to the RMAN recovery catalog, which contains the RMAN metadata for the target database
- D.set the database ID (DBID), but only if theDB_NAMEparameter associated with the target database is unique in the recovery catalog

Answer: C

QUESTION 58:

Exhibit

Results

Edit View Delete Acti						
Select Name	Type	Extent Management	Segment Management	Status	Size (MB)	Used (MB)
☒ SYSAUX	PERMANENT	LOCAL	AUTO	ONLINE	330.000	322.000
☐ SYSTEM	PERMANENT	LOCAL	MANUAL	ONLINE	470.000	462.625
☐ TEMP	TEMPORARY	LOCAL	MANUAL	ONLINE	20.000	6.000
☐ TT	PERMANENT	LOCAL	MANUAL	ONLINE	0.102	.102
☐ UNDOTBS1	UNDO	LOCAL	MANUAL	ONLINE	90.000	15.813
☐ USERS	PERMANENT	LOCAL	AUTO	ONLINE	127.500	1.625

Using Database Control, you have scheduled a job to shrink theTRANStable residing on theTT tablespace. The job would run at5:00 p.m.every Friday.

When you examine the space usage of the table after the completion of the job, you find that the table has not been shrunk.

What could have been the reason for this?

- A.The tablespace that contains theTRANStable is online.
- B.The tablespace that contains theTRANStable is permanent.
- C.The tablespace that contains theTRANStable is locally managed.
- D.The segment space management of the tablespace that contains theTRANStable is manual in nature.

Answer: D

QUESTION 59:

The warning and critical threshold values have been set to 85% and 97%, respectively, for one of the tablespaces. The current tablespace space usage is 54%. You modify the warning threshold to be 50 % and critical threshold to be 53% in Database Control.

Which statement is true?

- A.The new setting would be applied but no alerts would be raised immediately.
- B.The new setting would be applied and an alert would be raised immediately.
- C.The new setting would be ignored because the tablespace space usage is more than the specified threshold value.
- D.The new setting would cause an error because the tablespace space usage is more than the specified threshold

value.

Answer: A

QUESTION 60:

You defined the Recovery Manager (RMAN) retention policy to recovery window of 7 days by executing the following command:

RMAN> CONFIGURE RETENTION POLICY TO RECOVERY WINDOW OF 7 DAYS;

When a backup is performed, what would be the status of this backup after seven days?

- A.The backup would be marked as invalid.
- B.The backup would be marked as obsolete.
- C.The backup would be removed from the media.
- D.The backup would be removed from the RMAN repository.

Answer: B

QUESTION 61:

You work as a database administrator at Certkiller .com. You are working in an online transaction processing (OLTP) environment. You realize that the salary for an employee,John, has been accidentally modified in theEMPLOYEEstable. Two days ago, the data was in the correct state. Flashback logs generated during last two days are available in the flash recovery area.

Which option would you choose to bring the data to the correct state while ensuring that no other data in the same table is affected?

- A.perform point-in-time recovery
- B.perform a Flashback Table operation to restore the table to the state it was in two days ago
- C.perform a Flashback Database operation to restore the database to the state it was in two days ago
- D.perform Flashback Versions Query and Flashback Transaction Query to determine all the necessary undo SQL statements, and then use them for recovery

Answer: D

QUESTION 62:

When performing a backup using Recovery Manager (RMAN), which four types of files can be backed up with the RMANBACKUPcommand? (Choose four.)

- A.data file
- B.password file
- C.archivelogfile
- D.temporary file
- E.online redo log file
- F.the current control file
- G.thetnsnames.orafile
- H.current server parameter file

Answer: A, C, F, H

Not E: Online redo log file Are not supported

QUESTION 63:

You were recently hired by Certkiller .com as a database administrator. You are asked to find out whether the currently functional listener process, named L1, has been password protected or not. You are not familiar with the file system of the new organization.

How would you accomplish the task?

- A. by using the STATUS command of the Listener control utility
- B. by using the STATUS L1 command of the Listener control utility
- C. by using the SHOW RULES command of the Listener control utility
- D. by using the SET PASSWORD command of the Listener control utility
- E. by searching for the PASSWORD_LISTENER entry in the listener.ora file

Answer: B

QUESTION 64:

These are the details about V\$FLASHBACK_DATABASE_STAT:

```
SQL> DESC v$FLASHBACK_DATABASE_STAT
```

```
Name Null? Type
```

```
-----
```

```
BEGIN_TIME DATE
```

```
END_TIME DATE
```

```
FLASHBACK_DATA NUMBER
```

```
DB_DATA NUMBER
```

```
REDO_DATA NUMBER
```

```
ESTIMATED_FLASHBACK_SIZE NUMBER
```

Which two statements regarding the V\$FLASHBACK_DATABASE_STAT view are true? (Choose two.)

- A. BEGIN_TIME is the time at which Flashback logging is enabled.
- B. END_TIME is the time at which the query is executed on the view.
- C. REDO_DATA is the number of bytes of redo data written during the interval.
- D. This view contains information about flashback data pertaining to the last 24 hours.
- E. FLASHBACK_DATA is the amount of flashback data generated since the database was opened.

Answer: C, D

QUESTION 65:

You lost a temporary file that belongs to the default temporary tablespace in your database. From the options provided, which approach would you take to solve the problem?

- A. flash back the database
- B. import the temporary tablespace from the last export
- C. restore all the data files and temporary files from the last full database backup and perform a recovery
- D. not perform a recovery, but create a new temporary tablespace, make it the default temporary tablespace and

then drop the old tablespace

Answer: D

QUESTION 66:

Which two statements are correct regarding the Oracle Flashback Drop feature? (Choose two.)

- A. Recycle bin exists for the tables only in non-SYSTEM, locally managed tablespaces.
- B. You can flash back a dropped table provided row movement has been enabled on the table.
- C. If you drop an index before dropping its associated table, then the recovery of the index is not supported when you flash back the dropped table.
- D. When you execute the `DROP TABLESPACE? INCLUDING CONTENTS` command, the objects in the tablespace are placed in the recycle bin.
- E. When a dropped table is moved to the recycle bin, only the table is renamed to a system-generated name; its associated objects and constraints are not renamed.
- F. If you drop a table that is protected by the recycle bin, then associated bitmap-joined indexes and materialized view logs are also stored in the recycle bin.

Answer: A, C

QUESTION 67:

You want to create a consumer group, GROUP1, and you execute the following command in the command-line interface:

```
SQL> EXEC DBMS_RESOURCE_MANAGER.CREATE_CONSUMER_GROUP  
(CONSUMER_GROUP=>'group1', COMMENT=>'New Group');
```

This command errors out displaying the following message:

ERROR at line 1:

ORA-01031: insufficient privileges

ORA-06512: at "SYS.DBMS_RMIN", line 115

ORA-06512: at SYS.DBMS_RESOURCE_MANAGER", line 108

ORA-06512: at line 1

What action would you take to overcome this error?

- A. grant SYSDBA to the user
- B. grant SYSOPER to the user
- C. grant the RESOURCE role to the user
- D. use the GRANT command to grant the ADMINISTER_RESOURCE_MANAGER privilege to the user
- E. grant the ADMINISTER_RESOURCE_MANAGER privilege to the user by using the DBMS_RESOURCE_MANAGER_PRIVS package

Answer: E

QUESTION 68:

You noticed that the index tablespace in your database requires a recovery. However, instead of performing a media recovery, you decided to re-create the indexes in a new tablespace.

Which two options would you use to reduce the time it takes to re-create the indexes? (Choose two.)

- A.ONLINE
- B.REVERSE
- C.PARALLEL
- D.COMPRESS
- E.NOLOGGING
- F.COMPUTE STATISTICS

Answer: C, E

QUESTION 69:

In the parameter file of your production database, theFAST_START_MTTR_TARGETparameter is set to 300 to optimize instance recovery. While observing the performance of the database during instance recovery, you find that the redo log files are not sized properly to support this activity.

Which two sources could you use to determine the optimal size of the redo log files? (Choose two.)

- A.theV\$LOGview
- B.theV\$DBFILEview
- C.theV\$LOGFILEview
- D.theV\$INSTANCE_RECOVERYview
- E.Oracle Enterprise Manager Database Control

Answer: D, E

QUESTION 70:

Why would you use the followingFLASHBACK TABLEcommand?

FLASHBACK TABLEempTO TIMESTAMP ('11:45'.hh12:mi'

- A.to undo the changes made to theEMPtable since the specified time
- B.to restore theEMPtable that was wrongly dropped from the database
- C.to view the transactions that have modified theEMPtable since the specified time
- D.to view the changes made to theEMPtable for one or more rows since the specified time

Answer: A

QUESTION 71:

What effect should the loss of an index tablespace have on an Oracle instance that is running?

- A.instance hangs
- B.instance gets aborted
- C.instance continues running
- D.instance gets restarted automatically

Answer: C

QUESTION 72:

By using the transaction identifier provided by _____ for a particular row change, you can use the Flashback Transaction Query to see the operation performed by the transaction.

- A. Flashback Table
- B. Flashback Database
- C. Flashback Version Query
- D. The RMAN REPORT command
- E. The DBA_PENDING_TRANSACTIONS view

Answer: C

QUESTION 73:

You work as a database administrator at Certkiller .com. Manually, you set the consumer group of all of the newly created users to MYDB_GRP. You want the users to be able to change their consumer groups as per the application requirement.

What was the first step that was needed in the process to achieve this objective?

- A. The user must have been granted the DBA role.
- B. The user must have been granted the switch privilege as a part of a role.
- C. The user must have been granted the Resource Manager administrator privilege.
- D. The user must have been granted the switch privilege by using the DBMS_RESOURCE_MANAGER_PRIVS package.

Answer: D

QUESTION 74:

While setting up the threshold for tablespace space usage metrics for one of your tablespaces, you define the critical threshold as 60% and warning threshold as 75%. What would be the result of this setting?

- A. It would result in an error because the warning threshold cannot be more than the critical threshold.
- B. The warning threshold is ignored and alerts would be generated when space usage exceeds the critical threshold.
- C. The critical threshold is ignored and alerts would be generated when space usage exceeds the warning threshold.
- D. Both threshold values are used and alerts are generated when space usage exceeds the respective threshold values.

Answer: A

QUESTION 75:


You have created a resource plan, DB_PLAN, using DBMS_RESOURCE_MANAGER.CREATE_SIMPLE_PLAN and you want to impose a restriction on utilization of resources by the database users. Which step must be performed before you can start using the resource plan?

- A.assign users to consumer groups
- B.set the resource plan for the instance
- C.configure a simple resource plan and specify plan directives
- D.configure a complex resource plan and specify plan directives

Answer: A

QUESTION 76:

Exhibit

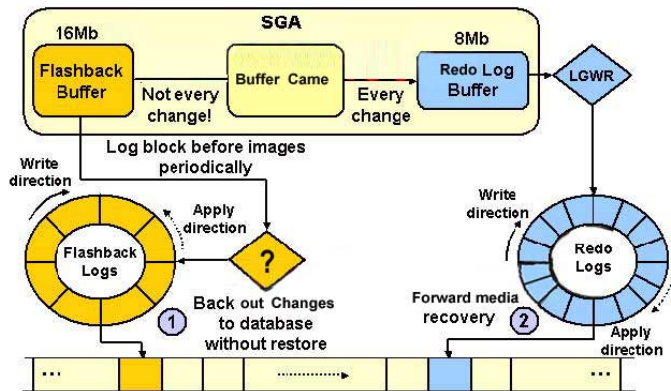

Viewing the Exhibit and examine the Flashback Database architecture.

Identify the missing component (shown with a "?" in the Flashback Database architecture).

- A.DBWR
- B.RVWR
- C.ARCH
- D.RECO
- E.TRWR

Answer: B

QUESTION 77:

Case 1:

- 1.Shut down the database and perform a backup.
- 2.Restore all the data files.
- 3.Mount the database.
- 4.Recover the database.
- 5.Without applying all the redo log files, open the database using theRESETLOGSoption.
- 6.Back up the database.

Case 2:

- 1.Shut down the database and perform a backup.
- 2.Restore only the data files of the tablespacewhere user error damaged the data.
- 3.Mount the database.
- 4.Recover the database.
- 5.Open the database with theRESETLOGSoption.

6.Back up the database.

Case 3:

1.Shut down the database.

2.Restore the data files.

3.Open the database.

4.Perform recovery to the current point in time.

Which case has the correct steps for an incomplete recovery?

A.Only case 1

B.Only case 2

C.Only case 3

D.Case 1 and 2

E.Case 2 and 3

F.Case 1 and 3

G.All cases, case 1, case 2, case 3

Answer: A

QUESTION 78:

You observe that the senior database administrator always uses the following command when connecting to Recovery Manager (RMAN), and then starts executing commands to backup the database files:

%rmantarget /

What would be the effect of this command?

A.RMAN would use the current operating system location to place the backup.

B.RMAN would use the control file of the target database to maintain the backup.

C.RMAN would use the recovery catalog of the target database to maintain the backup.

D.RMAN would use the control file of the target database to maintain the backup metadata.

E.RMAN would use the recovery catalog of the target database to maintain the backup metadata.

Answer: D

QUESTION 79:

You disabled the Flashback Database feature by using the following command:

SQL> ALTER DATABASE FLASHBACK OFF;

What would be the effect of this command on the existing flashback logs?

A.Flashback logs are not deleted.

B.Flashback logs are deleted automatically.

C.Flashback logs are deleted only if you are using Recovery Manager (RMAN)

D.Flashback logs are deleted only if you are using Oracle Manager Files (OFM)

E.Flashback logs are deleted only if you are using Automatic Storage Management (ASM)

Answer: B

QUESTION 80:

The production database has been functional for the last seven days. Because of application requirements, some of the initialization parameters were changed during run time without any comments. You have asked to find out the value of the parameters when the instance was started. Which source would you use to locate this information?

- A.Fixed views
- B.The alert log file
- C.The parameter file
- D.The server parameter file
- E.Dynamic performance views

Answer: B

QUESTION 81:

You have a disk group,DGROUP1, with three disk andNORMALredundancy. You execute the following command to create a template for the disk group:

```
ALTER DISKGROUP dgroup1  
ADD TEMPLATEmy_temp  
ATTRIBUTES (MIRROR FINE);
```

Which statement is true?

- A.When a file is created inDGROUP1with the template, it would have three-way mirroring.
- B.When a file is created inDGROUP1, theMY_TEMPtemplate becomes the default template.
- C.When a file is created inDGROUP1with the template, it would have two-way mirroring and file striping.
- D.When a file is created inDGROUP1with the template, it would have three-way mirroring and file striping.
- E.When a file is created inDGROUP1with the template, it would have two-way mirroring but no file striping.

Answer: C

QUESTION 82:

You lost the indextablespacein your database. You are not able to use tablespacepoint-in-time recovery on the indextablespace. What could be the reason for this?

- A.The indextablespacecontains bitmap indexes.
- B.The indextablespacecontains more than one data file.
- C.The indextablespace supports only complete recovery.
- D.The indextablespaceis not a dictionary-managedtablespace.
- E.There is a dependency relationship between a table and its indexes.

Answer: E

QUESTION 83:

For theV\$SESSION_LONGOPSview, you find that some of the database users have long-running queries that consume a lot of CPU time. This causes performance problems for other users in the database, who have much shorter queries.

You would like to make sure that the users with large queries do not use all the CPU time, but you still do

not want to terminate them with an error message.

Which method would you follow to achieve this?

- A.Set the CPU time per call in theusersprofile.
- B.Set the CPU time per session in theusersprofile.
- C.Set the CPU levels for the user's group using Resource Manager.
- D.Set theTIMED_STATISTICSparameter toTRUEin the parameter file.

Answer: C

QUESTION 84:

Exhibit:

Results

Select	Name	Type	Extent Management	Segment Management	Status	Size (MB)	Used (MB)
☐	SYSAUX	PERMANENT	LOCAL	AUTO	ONLINE	330.000	322.000
☐	SYSTEM	PERMANENT	LOCAL	MANUAL	ONLINE	470.000	462.625
☐	TEMP	TEMPORARY	LOCAL	MANUAL	ONLINE	20.000	6.000
☐	TT	PERMANENT	LOCAL	MANUAL	ONLINE	0.102	.102
☐	UNDOTBS1	UNDO	LOCAL	MANUAL	ONLINE	90.000	15.813
☐	USERS	PERMANENT	LOCAL	AUTO	ONLINE	127.500	1.625

View the Exhibit and examine the characteristic of theUSERStablespace.

You observe that a large volume of inserts and deletes are happening on theTRANStable in theUSERS tablespacesand you suspect that theTRANStable is fragmented.

Which advisory component would you refer to, in order to find information about table fragmentation?

- A.Memory Advisor
- B.Segment Advisor
- C.SLQ Tuning Advisor
- D.SLQ Access Advisor
- EAutomatic Database Diagnostic Monitor (ADDM)

Answer: B

QUESTION 85:

A data file becomecorrupted in your database due to bad sectors on the disk. Because of corruption, you lost all the important tables in that data file.

Which method would you use for recovery?

- A.Flash back all the tables in the data file, one by one.
- B.Restore the data file to a new location and perform a media recovery.
- C.Flash back thedatabase,there is no need to restore the data file.
- D.Restore the data file from the most recent backup and flash the database.

Answer: B

QUESTION 86:

For which two SQL statements can you use the Flashback Table feature to revert a table to its previous state? (Choose two)

- A.UPDATE TABLE
- B.CREATE CLUSTER
- C.TRUNCATE TABLE
- D.ALTER TABLE MOVE
- E.INSERT INTO...VALUES
- F.ALTER TABLE...DROP COLUMN
- G.ALTER TABLE...DROP PARTITION

Answer: A, E

QUESTION 87:

What purpose would you achieve by enabling the block change tracking feature?

- A.Eliminate the necessity for backups.
- B.Perform optimized image copy backups.
- C.Perform optimized incremental backups.
- D.Enable checkpoint (CKPT) to perform checkpointing at every block change.
- E.Enable database writer (DBWn) to write changed blocks to data files faster.

Answer: C

QUESTION 88:

You execute the following RMAN command in the order shown below:

BACKUP VALIDATE DATABASE;

BLOCKRECOVER CORRUPTION LIST;

What will these commands do?

- A.Create a backup of the database and recover all corrupted blocks found in the backup.
- B.Run a backup validation and list all the logically corrupt blocks as well as physically corrupt blocks in the database.
- C.Run a backup validation to populate V\$COPY_CORRUPTION view, and then list any corrupt blocks recorded in the view.
- D.Run a backup validation to populate V\$DATABASE_BLOCK_CORRUPTION view, and then repair any corrupt blocks recorded in the view.
- E.Run a backup validation, repair any corrupt blocks found during the validation process, and then update V\$DATABASE_BLOCK_CORRUPTION view to indicate which corrupt blocks have been repaired.

Answer: D

QUESTION 89:

In Recovery Manager (RMAN), you have set control file autobackup to ON by using the following command:

CONFIGURE CONTROLFILE AUTOBACKUP ON;

Which two events would cause the control file to be backed up automatically? (Choose two)

- A.A tablespace is taken offline.

- B.The database instance is restarted.
- C.A new data file is added to an existingtablespace.
- D.A successful backup is recorded in the RMAN repository.
- E.The RMAN connection is disconnected from the target database.

Answer: C, D

QUESTION 90:

You are working on an Oracle Database 10gdatabase. For which purposes would you use the Flashback Transaction Query feature? (Choose all that apply)

- A.To recover a dropped table.
- B.To recover a dropped schema.
- C.To recover data from a truncated table.
- D.To view changes made by all the transactions during a given period of time.
- E.To view changes made by a single transaction during a given period of time.

Answer: D, E

QUESTION 91:

Consider the following command to add a new disk group called"tdgroupA"with two failover groups:

```
CREATE DISKGROUPtdgroupANORMAL REDUNDANCY  
FAILOVERGROUP control01 DISK  
'/devices/A1',  
'/devices/A2',  
'/devices/A3'  
FAILOVERGROUP control02 DISK  
'/devices/B1',  
'/devices/B2',  
'/devices/B3'm
```

The disk"/devices/A1"is currently a member disk of a disk group by the name"tdgroup1".

Which task would be accomplished by the command?

- A.This command would result in an error because a disk group can have only one failover group.
- B.This command would result in an error because the/devices/A1disk is a member of another disk group tdgroup1.
- C.A new disk group calledtdgroupAwill be added with two failover groups and the/devices/A1disk will get reattached to the new disk group without being detached from the existing one.
- D.A new disk group calledtdgroupAwill be added with two failover groups and the/devices/A1disk will be ignored for the new disk group because it is a member of an existing disk grouptdgroup1.
- E.A new disk group calledtdgroupAwill be added with two failover groups and the/devices/A1disk gets detached from the existing disk grouptdgroup1and attached to the new disk grouptdgroupA.

Answer: B

QUESTION 92:

Your business has departmental reports that are generated every day. Each department must use the same set of queries, but access a different subset of data in the tables, depending on which department generates the report. The format of the reports is being developed; currently, the format changes daily. How would you configure the database to ensure that each department generates its report (based on its target data) using the most recent report format every day?

- A. By having each user run the report generation procedure at the scheduled time, supplying the necessary input variables.
- B. By creating a program using DBMS_JOB that accepts one or more variables, and creating a job that calls this program using DBMS_JOB.
- C. By having each user schedule a job using DBMS_JOB that accepts one or more input variables and calls a procedure that generates the report.
- D. By having each user create a job using DBMS_SCHEDULER that includes all the information and commands necessary to generate the report.
- E. By creating a program using DBMS_SCHEDULER that accepts one or more variables, and creating a job that calls this program using DBMS_SCHEDULER.

Answer: E

QUESTION 93:

You execute the following command to create two consumer groups, FIN_GROUP1 and PAY_GROUP1 for a plan, PROD_PLAN:

```
BEGIN
DBMS_RESOURCE_MANAGER.CREATE_SIMPLE_PLAN (SIMPLE_PLAN => 'prod_plan',
CONSUMER_GROUP1 => 'fin_group1',
GROUP1_CPU => 80,
CONSUMER_GROUP2 => 'pay_group1',
GROUP2_CPU => 20);
END;
```

Which three statements are true? (Choose three)

- A. SYS_GROUP gets 100% CPU resources at level 1.
- B. FIN_GROUP1 gets 80% CPU resources at level 1.
- C. FIN_GROUP1 gets 80% CPU resources at level 2.
- D. PAY_GROUP1 gets 20% CPU resources at level 1.
- E. PAY_GROUP1 gets 20% CPU resources at level 2.
- F. OTHER_GROUP gets 100% CPU resources at level 1.
- G. OTHER_GROUP gets 100% CPU resources at level 2.

Answer: A, C, E

QUESTION 94:

You have configured Automatic Shared Memory Management. Which four memory structures would be automatically tuned? (Choose four)

- A.log buffer
- B.Java pool
- C.Large pool
- D.Fixed SGA
- E.Shared pool
- F.Streams pool
- G.Keep buffer cache
- H.Database buffer cache

Answer: B, C, E, H

QUESTION 95:

The DB_BLOCK_CHECKING initialization parameter is set to FALSE. What level of block checking would be performed?

- A.The Oracle database will not perform block checking for any of the data blocks.
- B.The Oracle database will perform block checking for the default permanent tablespaces only.
- C.The Oracle database will perform block checking for the data blocks in all user tablespaces.
- D.The Oracle database will perform block checking for the data blocks in the SYSTEM tablespace only.
- E.The Oracle database will perform block checking for the data blocks in the SYSTEM and SYSAUX tablespaces.

Answer: D

QUESTION 96:

Which statement is true regarding the creation of nested plans using Resource Manager?

- A.Only one nested subplan is allowed.
- B.The plans can be nested up to four levels.
- C.Resource Manager does not support nested plans.
- D.Nested plans control only the degree of parallelism but not the CPU usage.
- E.Each nested plan gets a proportion of the CPU resources assigned to its parent group.

Answer: E

QUESTION 97:

You want your listener to be password protected to prevent it from being shut down. You want to accomplish this task while the listener is functional. Which method could you use to achieve this objective?

- A.Use the CHANGE_PASSWORD command of the Listener control utility.
- B.Use the SET PASSWORD and SAVE_CONFIG commands of the Listener control utility.
- C.Use the CHANGE_PASSWORD and SAVE_CONFIG commands of the Listener control utility.
- D.Manually modify the listener.ora file to include the password for the listener and restart the listener.

Answer: C

QUESTION 98:

You need to check theEMP_EASTpartition in theEMPLOYEEStable for physical corruptions. You also need to verify that the rows belong to the correct partition. Which option could you use?

- A.LogMiner
- B.TheDBNEWIDutility
- C.TheDBVERIFYutility
- D.TheANALYZEcommand
- E.The RMANREPORTcommand
- F.The RMANCROSSCHECKcommand.
- G.The RMANBLOCKRECOVERcommand.

Answer: D

QUESTION 99:

Users in your production database complain that they are getting the following error message while trying to insert rows into theORDERStable:

ERROR at line 1:

ORA-01654: unable to extend index USERS.ORDERS_IND by 8 intablespaceINDEXES

While investigating, you find that theINDEXESTablespacehas run out of space and there is no more free space on the disk where the data files are available.

Which two actions could you perform to overcome this error without affecting the queries that are currently being executed? (Choose two)

- A.Drop and re-create the inbox.
- B.CoalescetheORDERS_INDindex.
- C.CoalescetheINDEXESTablespace.
- D.Drop and re-create theORDERStable.
- E.Rebuild the index online and move it to another tablespace.

Answer: B, E

QUESTION 100:

Consider the following scenario:

You have a directory,data, under the disk grouptdgroupA.You want to create an alias for one of the data files and you execute the following command:

```
ALTER DISKGROUPtdgroupA  
ADD ALIAS '+tdgroupA/data/datafile.dbf'  
FOR'+tdgroupA.231.45678';
```

Which task would be accomplished by the command?

- A.The command drops the file+tdgroupA.231.45678.
- B.The command physically relocated the file to+tdgroupA/dataand renames the file todatafile.dbf.
- C.The command creates a copy of the+tdgroupA.231.45678file and places it in+tdgroupA/dataafter renaming the file todatafile.dbf.

D.The command creates an alias,datafile.dbf, and places it in+tdgroupA/dataand does not remove thetdgroupA 231.45678file.

E.The command creates a file,datafile.dbf, in+tdgroupA/dataand removed the references for +tdgroupA.231.45678from the data dictionary views.

Answer: D

Oracle Database Administrator Guide Ch12 P25

QUESTION 101:

You lost a data file that belongs to an indextablespacein your database, which operates inARCHIVELOG mode. Loss of the data file resulted in increased response time on your queries.

Which two options would you use to solve this problem? (Choose two)

A.Restore the lost data file from the backup, and then flash back the database.

B.Restore the data file pertaining to indextablespace, and then recover thetablespace.

C.Restore all the data files, and then perform an incomplete recovery to get thetablespaceback.

D.Restore all the data files, and then perform an incomplete recovery using the backup control file.

E.Drop and re-create the indextablespace, and then re-create all of the indexes in thattablespace.

Answer: B, E

QUESTION 102:

You database operates inARCHIVELOGmode and user-managed consistent backups are performed every Sunday night. On Tuesday, at9:00 a.m.the current log sequence number was 369. Also, on Tuesday you lost the data file belonging to theSYSTEMtablespaceand anarchivelogfile (sequence number 356) that contained redo entries between8:00 a.m.and8.30 a.m.

With reference to this scenario, what would you do to recover the database?

A.Restore all the data files from last Sunday's backup, and then perform a time-based recovery.

B.Restore all the data files from last Sunday's backup, and then perform a cancel-based recovery.

C.Restore all the data files from last Sunday's backup, and then perform a change-based recovery.

D.Restore only data files that belong to theSYSTEMtablespacefrom last Sunday's backup, and then perform a complete recovery.

Answer: B

QUESTION 103:

You executed the following query in your database:

```
SELECToldest_flashback_scn,oldest_flashback_time  
FROM V$FLASHBACK_DATABASE_LOG;
```

What would you determine from the output?

A.The time when the last flashback operation in your database was performed.

B.The time when the first flashback operation in your database was performed.

C.A list of flashback operations performed in your database using SCN and time.

D.The approximate time and the lowest system change number (SCN) to which you can flash back your

database.

Answer: D

QUESTION 104:

While designing the database for one of your online transaction processing (OLTP) applications, you want to achieve the following:

- a) high availability of data
- b) faster primary key access to the table data
- c) compact storage for the table

Which type of tables would you use to achieve these objectives?

- A. heap tables
- B. object tables
- C. partitioned tables
- D. index-organized tables (IOTs)

Answer: D

QUESTION 105:

You are using Oracle Database 10g. The log `LOG_ARCHIVE_FORMAT` parameter is set to 'LOG%t_%s_%r.dbf'.

Why is %r used in the file name format?

- A. To uniquely identify the archived log files with the restore operation.
- B. To uniquely identify the archived log files with the redo log group number.
- C. To uniquely identify the archived log files for each incarnation of the database.
- D. To uniquely identify the archived log files with the number of recovery operations performed.

Answer: C

QUESTION 106:

Exhibit:


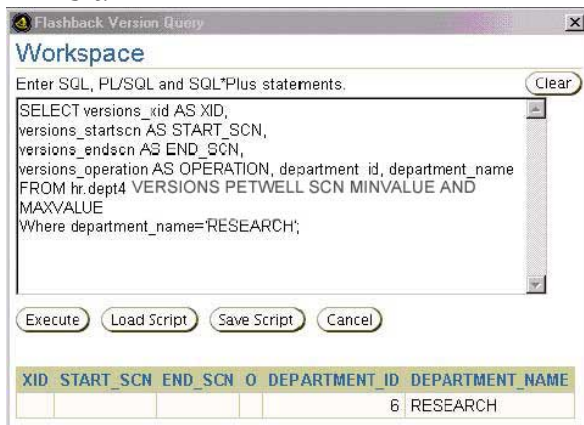


Exhibit:

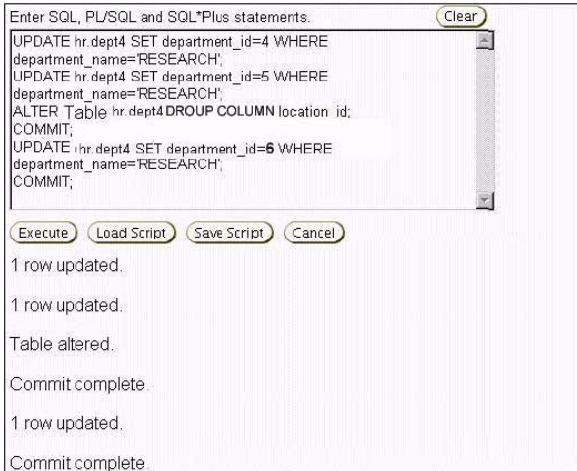

Enter SQL, PL/SQL and SQL*Plus statements. Clear

```
UPDATE hr.dept4 SET department_id=4 WHERE
department_name='RESEARCH';
UPDATE hr.dept4 SET department_id=5 WHERE
department_name='RESEARCH';
ALTER Table hr.dept4 DROUP COLUMN location_id;
COMMIT;
UPDATE hr.dept4 SET department_id=6 WHERE
department_name='RESEARCH';
COMMIT;
```

Execute Load Script Save Script Cancel

1 row updated.
1 row updated.
Table altered.
Commit complete.
1 row updated.
Commit complete.

View the Exhibits.

You performed operations on the DEPT4 table as shown in the Exhibit. When you perform the Flashback Versions Query, you find that the first two updates are not listed.


What could be the reason?

- A. The row movement is not enabled on the table.
- B. The first two updates were not explicitly committed.
- C. The Flashback Versions Query lists only the most recent update.
- D. The Flashback Versions Query stops producing rows after it encounters a time in the past when the table structure was changed.

Answer: D

QUESTION 107:

Exhibit:

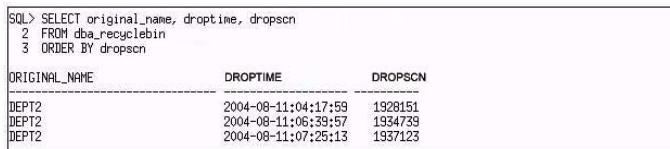

```
SQL> SELECT original_name, droptime, dropsn
2 FROM dba_recyclebin
3 ORDER BY dropsn
```

ORIGINAL_NAME	DROPTIME	DROPSN
DEPT2	2004-08-11:04:17:59	1928151
DEPT2	2004-08-11:06:39:57	1934739
DEPT2	2004-08-11:07:25:13	1937123

View the Exhibit.

You have more than one table in the recycle bin having the same original name, DEPT2. You do not have any table with the name DEPT2 in your schema. You executed the following command:

```
PURGE TABLE dept2;
```

Which statement is correct in this scenario?

- A. All the tables having the same original name as DEPT2 will be purged from the recycle bin.
- B. The table with dropsn = 1928151 (oldest dropsn) will be purged from the recycle bin.
- C. The table with dropsn = 1937123 (most recent dropsn) will be purged from the recycle bin.
- D. None of the tables will be purged because there are multiple entries with the same original name in the recycle bin.

Answer: B

QUESTION 108:

Which type of PL/SQL construct would you use to automatically correct the error resulting from a statement that was suspended due to a space-related problem?

- A.functions
- B.package
- C.procedure
- D.database trigger
- E.anonymous PL/SQL block

Answer: D

QUESTION 109:

In an Oracle 10g database, the in-memory statistics are gathered at regular intervals and used to perform growth-trend analysis and capacity planning of the database. Which component stores these statistics?

- A.Recovery catalog
- B.Oracle Enterprise Manager Repository
- CAutomatic Workload Repository (AWR)
- D.Oracle 10gEnterprise Manager Grid Control
- EAutomaticDatabase Diagnostic Monitor (ADDM)

Answer: C

QUESTION 110:

You have been assigned to manage a set of databases. The previous DBA did not leave you notes regarding the structure of each of the databases. While analyzing an instance, you notice that the system identifier (SID) for the instance is set to '+ASM'.

What is the purpose of this instance?

- A.This instance is being used to manage the operating system files.
- B.This instance is being used to manage the files of other databases.
- C.This instance is being used to manage the instances of other databases.
- D.This instance is being used to manage the background processes of other instances.

Answer: B

QUESTION 111:

In one of your online transaction processing (OLTP) applications, most users frequently modify the values, including the key values, of the application tables. Some users generate application reports by using multiple application tables.

What is the best table structure that you can use to gain optimal performance?

- A.Heap table
- B.Object table
- C.External table

- D.Clustered table
- E.Global temporary table
- F.Index-organized table (IOT)

Answer: A

QUESTION 112:

Your database is functioning inNOARCHIVELOGmode. Your database contains 15 tablespaces. You want to use Recovery Manager (RMAN) to perform backups.

Which two backups would you be able to perform when the database is being accessed by users? (Choose two)

- A.Backup of offline tablespaces.
- B.Backup of read-only tablespaces.
- C.Backup of system-critical tablespaces.
- D.Backup of online, locally managed tablespaces.
- E.Backup of read/write dictionary-managed tablespaces.

Answer: A, B

QUESTION 113:

You are working in an online transaction processing (OLTP) environment. You used theFLASHBACK TABLEcommand to flash back theCUSTOMERStable. Before executing theFLASHBACK TABLE command, the System Change Number (SCN) was 663571. After flashing back theCUSTOMERStable, you realize that the table is not in the correct state and the resultant changes are not what you had desired. So, you need to reverse the effects of theFLASHBACK TABLEcommand while ensuring that:

- a) No other user data in the database is affected.
- b) The operation takes the minimum possible time

Which option would you choose?

- A.UseROLLBACKcommand with SCN 663571.
- B.Perform Flashback Transaction Query with SCN 663571.
- C.Execute theFLASHBACK DATABASEstatement to retrieve theCUSTOMERStable as it was at SCN 663571.
- D.Execute anotherFLASHBACK TABLEstatement to retrieve theCUSTOMERStable as it was at SCN 663571.

Answer: D

QUESTION 114:

Because of hardware failure, you decided to drop a redo log member from the database.

Which condition should be met to drop a redo log file?

- A.The redo log file should belong to an active group.
- B.The redo log file should belong to an inactive group.
- C.The redo log file should belong to the current group.
- D.The redo log file can be dropped only if all the transactions are stopped.

E.Before a redo log file is dropped, it should be deleted from the operating system (OS).

Answer: B

QUESTION 115:

In your production database, you have multiple resource plan directives that refer to the customer group DB_GRP. Which two statements are correct? (Choose two)

- A.The parallel degree limit forDB_GRPwill be the minimum of all the incoming values.
- B.The parallel degree limit forDB_GRPwill be the maximum of all the incoming values.
- C.The maximum estimated execution time forDB_GRPwould be the most nonrestrictive of all incoming values.
- D.If a session switched from theDB_GRPconsumer group to another consumer group because it exceeded the prescribed switch time, then that session would not execute if the active session pool for the new consumer group was full.
- E.Is a session switched from theDB_GRPconsumer group to another consumer group because it exceeded the prescribed switch time, then that session would execute even if the active session pool for the new consumer group was full.

Answer: A, E

QUESTION 116:

By mistake, you ran the batch job (for updating theBILL_DETAILStable) twice. You are not sure which rows in theBILL_DETAILStable were affected. You need to identify:

- a) A list of changes made along with the transaction identifier of each change.
- b) The necessary SQL statements to undo the erroneous changes.

Which option would you choose?

- A.RMAN only.
- B.Flashback Table only.
- C.Flashback Version Query only.
- D.Flashback Database and Flashback Transaction Query.
- E.Flashback Version Query and Flashback Transaction Query.

Answer: E

QUESTION 117:

You used the following command in Recovery Manager (RMAN) as part of the recovery process:

RESTORE CONTROLFILE FROM AUTOBACKUP;

How does RMAN find the control fileautobackup? (Choose all the apply)

- A.By using the trace file.
- B.By using the alert log file.
- C.By using the database ID.
- D.By using the server parameter file.
- E.By using theV\$CONTROLFILEview.
- F.By using theautobackupformat configuration setting.

Answer: C, F

QUESTION 118:

In one of your online transaction processing (OLTP) applications, users are manipulating and querying a database table simultaneously. From the Segment Advisor, you find that one of the tables is highly fragmented and you want to shrink the table immediately without affecting the currently active queries. Which option would you use with the ALTER TABLE command to achieve this objective?

- A. REBUILD
- B. CASCADE
- C. TRUNCATE
- D. ROW MOVEMENT
- E. SHRINK SPACE COMPACT
- F. SHRINK SPACE CASCADE

Answer: E

QUESTION 119:

You are working in a dedicated server environment. Your database is running in the automatic Program Global Area (PGA) memory management mode. Which two statements are correct in this scenario? (Choose two)

- A. The WORK_AREA_SIZE_POLICY initialization parameter cannot be set to AUTO.
- B. The Oracle database automatically controls the amount of PGA memory allotted to SQL work areas.
- C. Setting the value of the SGA_TARGET initialization parameter to 0 will disable the automatic PGA memory management.
- D. The SORT_AREA_SIZE parameter is ignored by all the sessions running in the automatic PGA memory management mode.

Answer: B, D

QUESTION 120:

Users are performing a large volume of inserts and deletes on the application tables in the APPS tablespace. You observe that there are several warning alerts being generated for the APPS tablespace space usage metrics. Currently, the warning threshold for the tablespace usage metrics is set to 70%. To make the generated alerts more useful as a problem identification tool, you want to reduce the frequency of alert generation for the tablespace usage metrics for the APPS tablespace. What should you do?

- A. Disable SQL tracing for the APPS tablespace.
- B. Disable logging attributes for the APPS tablespace.
- C. Modify the tablespace to be a dictionary-managed tablespace.
- D. Increase the critical threshold value for the tablespace usage metrics for the APPS tablespace.
- E. Increase the warning threshold value for the tablespace usage metric for the APPS tablespace.

Answer: E

QUESTION 121:

Using Oracle Scheduler you have scheduled two jobs, JOB_A and JOB_B, to run at 9:00 p.m. every Friday. You want both the jobs to use a single resource plan, WEEKEND_PLAN.

Which task must have already been performed to enable you to achieve this objective?

- A. A window must have been created with the WEEKEND_PLAN resource plan.
- B. A program must have been created with the WEEKEND_PLAN resource plan.
- C. A job class must have been created with the WEEKEND_PLAN resource plan.
- D. A windows group must have been created with the WEEKEND_PLAN resource plan.

Answer: A

QUESTION 122:

What are the two advantages of RMAN Block Media Recovery (BMR) over file-level recovery? (Choose two)

- A. BMR lowers the mean time to recover (MTTR).
- B. BMR supports point-in-time recovery of individual data blocks.
- C. BMR enables you to use incremental backups for block recovery.
- D. BMR enables recovery even when the database is not mounted or open.
- E. BMR enables you to use proxy backups to perform block media recovery.
- F. BMR enables increased availability of data during recovery because the data file requires a recovery can remain online.

Answer: A, F

QUESTION 123:

While creating a scheduler window using the DBMS_SCHEDULER package, a user logged in as DBMGR gets the error message insufficient privileges?

Which two commands would you use to resolve this error? (Choose two)

- A. GRANT dba TO dbmgr
- B. GRANT connect TO dbmgr
- C. GRANT resource TO dbmgr
- D. GRANT sys_admin_role TO dbmgr
- E. GRANT manage scheduler TO dbmgr

Answer: A, E

QUESTION 124:

You have set the value of the NLS_TIMESTAMP_TZ_FORMAT parameter in the parameter file to YYYY-MM-DD. The default format of which two data types would be affected by this setting? (Choose

two)

- A.DATE
- B.TIMESTAMP
- C.INTERVAL YEAR TO MONTH
- D.INTERVAL DAY TO SECOND
- E.TIMESTAMP WITH LOCAL TIME ZONE

Answer: B, E

QUESTION 125:

For an incomplete recovery, which four backup types can be used by Recovery Manager (RMAN) to restore data files? (Choose four)

- A.RMAN image copies.
- B.RMAN database backups.
- C.RMAN tablespace backups.
- D.User-managed backups placed in the flash recovery area.
- E.User-managed backups that have been cataloged with RMAN.
- F.User-managed data file backups for which the pull path name is specified.

Answer: A, B, C, E

QUESTION 126:

You are using Oracle Database 10g. You performed an incomplete recovery of your database and opened the database with the RESETLOGS option.

What is the effect of opening the database with the RESETLOGS option? (Choose two)

- A.This operation resets the SCN for the database.
- B.This operation creates a new incarnation of the database.
- C.This operation moves all the redo log files to a different location.
- D.This operation deletes the old redo log files and creates new redo log files.
- E.This operation updates all current datafiles and online redo logs and all subsequent archived redo logs with a new RESETLOGS SCN and time stamp.

Answer: B, E

QUESTION 127:

Which statement is true while creating subplans using Resource Manager?

- A.The subplan must belong to the consumer group, SYS_GROUP.
- B.The total CPU usage at any given level must be less than 100%.
- C.The subplans can be used to restrict the degree of parallelism for a user.
- D.You can use a resource plan instead of a consumer group to implement a priority ranking within the plan.

Answer: D

QUESTION 128:

Your database is functioning in ARCHIVELOG mode. In which two situations would you perform a cancel-based recovery? (Choose two)

- A. You find that one of the redo log members in each redo log group is lost.
- B. You find that a data file that belongs to the `USERSTablespace` is damaged.
- C. You find that a data file that belongs to the `SYSTEMtablespace` is damaged.
- D. You find that the current redo log group is damaged and is not available for recovery.
- E. You realized while performing a recovery that an archived redo log file needed for recovery is lost.

Answer: D, E

QUESTION 129:

In your test database, you have created the `ORDER` table as an index-organized table (IOT). To facilitate faster querying, you have created a mapping table and a bitmap index on the `ORDER_FILLED` column. You observe that the query performance degrades when users perform a large volume of transactions. While investigating the reason, you find that the mapping table segment is fragmented, leading to poor performance. Which option would you use to defragment the mapping table without affecting the original table data?

- A. Export and import the mapping table.
- B. Drop and re-create the mapping table.
- C. Truncate the mapping table and reinsert the values.
- D. Use the `ALTER TABLE ..REBUILD` command to defragment the mapping table.

Answer: B

QUESTION 130:

A media failure has occurred. This has resulted in all the members of the next hop log group being rendered inaccessible to the log writer process (LGWR) at a log switch. How does this failure affect the operational database?

- A. The database re-created the missing redo log files automatically.
- B. The database continues to function normally with the existing files.
- C. The database allows only queries, no other statements are allowed.
- D. The database returns an error and the database instance shuts down.
- E. The user sessions that generate redo logs are terminated automatically.

Answer: D

QUESTION 131:

Consider the following command to create a tablespace in your production database (which is using an Automatic Storage Management [ASM] instance to manage the database files):

```
CREATE TABLESPACE user_tbsp  
DATAFILE '+dggroup3 (usder_temp) /user_files/user_tbsp' SIZE 200M;
```

What would be the result of this command?

- A.It would result in an error because the template cannot be used along with the disk group.
- B.It would result in an error because the path cannot be specified while creating atablespacein a disk group.
- C.It would create atablespacewith a data file that has an alias, and its attributes are set by the user-defined template.
- D.It would create atablespacewith a data file that does not have an alias, and its attributes are set by the user-defined template.

Answer: C

QUESTION 132:

You enabled the flashback logging feature, but you have not specified the location of the flash recovery area.

Which location would be used as the default location for the flash recovery area?

- A.The location used for control files.
- B.The location used for redo log files.
- C.The location set by using\$ORACLE_BASE.
- D.The location set by using\$ORACLE_HOME.
- E.The location set by usingCORE_DUMP_DEST.
- F.The location set by usingBACKGROUND_DUMP_DEST.

Answer: C

QUESTION 133:

Which three methods can you use to run an Automatic Database Diagnostic Monitor (ADDM) analysis over a specific time period? (Choose three.)

- A. Enterprise Manager GUI
- B. DBMS_TRACE package APIs
- C. DBMS_ADVISOR package APIs
- D. DBMS_MONITOR package APIs
- E. \$ORACLE_HOME/rdbms/admin/addmrpt.sql script

Answer: A, C, E

Explanation:

To make use of ADDM, a PL/SQL interface called DBMS_ADVISOR has been implemented. This PL/SQL interface may be called through the supplied \$ORACLE_HOME/rdbms/admin/addmrpt.sql script, called directly, or used in combination with the Oracle Enterprise Manager application. Besides this PL/SQL package a number of views (with names starting with the DBA_ADVISOR_ prefix) allow retrieval of the results of any actions performed with the DBMS_ADVISOR API. The preferred way of accessing ADDM is through the

Enterprise Manager interface, as it shows a complete performance overview including recommendations on how to solve bottlenecks on a single screen. When accessing ADDM manually, you should consider using the ADDMRPT.SQL script provided with your Oracle release, as it hides the complexities involved in accessing the DBMS_ADVISOR package.

QUESTION 134:

Which background process does Automatic Shared Memory Management use to coordinate the sizing of memory components?

- A. PMON
- B. SMON
- C. MMNL
- D. MMAN
- E. MMON

Answer: D

The Automatic Shared Memory Management feature uses a new background process named Memory Manager (MMAN). MMAN serves as the SGA Memory Broker and coordinates the sizing of the memory components. The SGA Memory Broker keeps track of the sizes of the components and pending resize operations

REF.: Metalink Note:268197.1: New Background Processes In 10g

QUESTION 135:

Which six files are maintained in the Flash Recovery Area? (Choose six.)

- A. control file
- B. RMAN files
- C. password file
- D. parameter file
- E. flashback logs
- F. data file copies
- G. core dump files
- H. archived log files
- I. RMAN recovery scripts
- J. control file autobackups

Answer: A, B, E, F, H, J

The Flash Recovery Area is a unified storage location for all recovery-related files and activities in an Oracle Database. It includes Control File, Archived Log Files, Flashback Logs, Control File Autobackups, Data Files, and RMAN files.

QUESTION 136:

Consider the following scenario:

You have a directory, data, under the disk group tdgroup

A. You want to create an

alias for one of the data files and you execute the following command:

```
ALTER DISKGROUP tdgroupA
```

```
ADD ALIAS '+tdgroupA/data/datafile.dbf'
```

```
FOR '+tdgroupA.231.45678';
```

Which task would be accomplished by the command?

A. The command drops the file +tdgroupA.231.45678

B. The command physically relocates the file to +tdgroupA/data and renames the file to datafile.dbf.

C. The command creates a copy of the +tdgroupA.231.45678 file and places it in +tdgroupA/data after remaining the file to datafile.dbf.

D. The command creates a synonym, datafile.dbf, and places it in +tdgroupA/data and does not remove the +tdgroupA.231.45678 file.

E. The command creates a file, datafile.dbf, in +tdgroupA/ data and removes the references for +tdgroupA.231.45678 from the data dictionary views.

Answer: D

Alias names (or just "aliases") are intended to provide a more user-friendly means of referring to ASM files, rather than using the system-generated filenames. You can create an alias for a file when you create it in the database, or you can add an alias to an existing file using the ADD ALIAS clause of the ALTER DISKGROUP statement. You can create an alias in any system-generated or user-created ASM directory. You cannot create an alias at the root level (+), however. The following statement adds a new alias name for a system-generated file name:

```
ALTER DISKGROUP dgroup1
```

```
ADD ALIAS '+dgroup1/mydir/second.dbf'
```

```
FOR '+dgroup1/sample/datafile/mytable.342.3';
```

```
REF.: Oracle(r) 10g Administrator Guide, 12-28
```

QUESTION 137:

Exhibit



One the evening of April 22, you are working on a database created using Oracle

Database 10g. This database operates in the ARCHIVELOG mode. You discover that you need crucial data that was dropped from the database at 8:00 a.m. No full backup has been taken after April 15.

What would you do?

- A. recover the database until April 10
- B. recover the database until April 15
- C. recover the database until 22 7:59 a.m.
- D. recovery is not possible; manually re-create the objects

Answer: C

RMAN simplifies recovery operations using backups taken from earlier database incarnation so that it is easy as recovering a backup from the same incarnation. The simplified recovery through RESETLOGS feature is an enhancement to recovery operations so that previous incarnation backups can be used for recovery of the current database incarnation. You use this feature when you have performed an incomplete recovery (or a recovery using a backup control file) and opened the database with the RESETLOGS option.

To perform incomplete recovery, use the SET UNTIL command to specify the time, SCN, restore point, or log sequence number at which recovery terminates. Alternatively, specify the UNTIL clause on the RESTORE and RECOVER commands.

REF.: Oracle(r) Database 10g: New features for Oracle 8i, 18-21 and Oracle(r) 10g Backup and Recovery

QUESTION 138:

You are unable to move the Unified Job Scheduler occupant from the SYSAUX tablespace to the USERS tablespace. What could be the reason?

- A. None of the SYSAUX occupants can be relocated.
- B. The USERS tablespace is a bigfile tablespace (BFT).
- C. The unified Job Scheduler occupant cannot be relocated.
- D. The SYSAUX occupants can be relocated to the SYSTEM tablespace only.

Answer: C

A - Not true. Some of the occupants can be moved

B - Not true. The USERS occupant, isn't, by default a BFT tablespace, and even though, you should be able to move anything to a BFT tablespace. The point is about to move, SYSAUX occupant.

C - True answer, as you can check, by the following query :

```
SELECT occupant_name, move_procedure,
FROM v$sysaux_occupants;
OCCUPANT_NAME MOVE_PROCEDURE
```

```
-----
AO DBMS_AW.MOVE_AWMETA
```

```
EM emd_maintenance.move_em_tblspc
```

```
JOB_SCHEDULER *** MOVE PROCEDURE NOT APPLICABLE **
```

LOGMNR SYS.DBMS_LOGMNR_D.SET_TABLESPACE
LOGSTDBY SYS.DBMS_LOGSTDBY.SET_TABLESPACE
ODM MOVE_ODM
ORDIM *** MOVE PROCEDURE NOT APPLICABLE ***
ORDIM/PLUGINS *** MOVE PROCEDURE NOT APPLICABLE ***
ORDIM/SQLMM *** MOVE PROCEDURE NOT APPLICABLE ***
SDO MDSYS.MOVE_SDO
STATSPACK Use export/import (see export parameter file spuexp.par)
STREAMS
TEXT DRI_MOVE_CTXSYS
ULTRASEARCH MOVE_WK
WM DBMS_WM.move_proc
D - Not true. Can move SYSAUX occupants, when is possible, to any tablespace that you want.
REF.: Metalink Note: 243246.1: 10G : SYSAUX Tablespace

QUESTION 139:

You enabled block change tracking for faster incremental backups in your database.

Which background process writes to the change tracking file?

- A. RBAL
- B. CKPT
- C. SMON
- D. PMON
- E. MMON
- F. CTWR
- G. DBWR

Answer: F

CTWR : This is a new process Change Tracking Writer (CTWR) which works with the new block changed tracking features in 10g for fast RMAN incremental backups.

REF.: Metalink Note:268197.1: New Background Processes In 10g

QUESTION 140:

You want to enforce a company's business policy on several objects by using a single policy function.

Which two types of policies can be assigned to the policy_type argument in the dbms_ols.add_policy procedure to achieve the above objective? (Choose two.)

- A. DBMS_RLS.STATIC
- B. DBMS_RLS.DYNAMIC
- C. DBMS_RLS.SHARED_STATIC
- D. DBMS_RLS.CONTEXT_SENSITIVE

E. DBMS_RLS.SHARED_CONTEXT_SENSITIVE

Answer: C, E

DBMS_RLS. SHARED_STATIC

The policy function executes once, Once, then the predicate is cached in the SGA, and it's Shared Across Multiple Objects, like Hosting environments, such as data warehouses where the same predicate must be applied to multiple database objects

DBMS_RLS. SHARED_CONTEXT_SENSITIVE

The policy function executes first time and the object is reference in a database session Predicates are cached in the private session memory UGA so policy functions can be shared among objects.

REF.: Oracle(r) Database Security Guide 10g Release 2 (10.2) - p 15-30

QUESTION 141:

The database is currently running in the NOARCHIVELOG mode.
What would be the first step to configure Flashback Database?

- A. Enable flashback logging.
- B. Start the database in the ARCHIVELOG mode.
- C. Issue the ALTER DATABASE FLASHBACK ON; command.
- D. Set the FAST_START_MTTR_TARGET initialization parameter.

Answer: A

Here is the problem... the question ask "for the first step"...But the database MUST be in archivelog mode and de flash recovey area MUST be enable, thus I belive the answer correct would be A and B.

Flashback Database uses its own logging mechanism, creating flashback logs which are stored in the flash recovery area. You can only use Flashback Database if flashback logs are available. Therefore, you must set up your database in advance to create flashback logs if you want to take advantage of this feature.

The requirements for enabling Flashback Database are:

- * Your database must be running in ARCHIVELOG mode, because archived logs are used in the Flashback Database operation.
- * You must have a flash recovery area enabled, because flashback logs can only be stored in the flash recovery area.

REF.: Oracle(r) 10g Backup and Recovery Basics, 5-2 and 5-9