



TestKingonline.com

No Pass No Pay!

MCSE, CCNA, CCNP, OCP, CIW, JAVA, Sun Solaris, Checkpoint

World No 1 Cert Exams

TS: Microsoft SQL Server 2005 Business Intelligence – Implementation and Maintenance

70-445

Congratulations!

You have purchased a TestKingonline. Study Guide.

This study guide is a complete collection of questions and answers that have been developed by our professional & certified team.

You must study the contents of this guide properly in order to prepare for the actual certification test. The average time that we would suggest you for studying this study guide is approximately 10 to 20 hours and you will surely pass your exam. We guarantee it!

GOOD LUCK!

DISCLAIMER

This study guide and/or material is not sponsored by, endorsed by or affiliated with Microsoft, Cisco, Oracle, Citrix, CIW, Checkpoint, Novell, Sun/Solaris, CWNA, LPI, ISC, etc. All trademarks are properties of their respective owners.

Guarantee

If you use this study guide correctly and still fail the exam, send a scanned copy of your official score notice at:

Sales@Testkingonline.com

We will gladly refund the cost of this study guide or give you an exchange of study guide of your choice of the Free.

This material is protected by copyright law and international treaties. Unauthorized reproduction or distribution of this material, or any portion thereof, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under law.

Question: 1

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package.

The package has the following features:

Two Data Flow tasks and two Control Flow tasks

A success constraint between each Data Flow task and the subsequent Control Flow task

The package uses one transaction for all the tasks.

You need to configure the package so that the two Data Flow tasks use their own transactions.

You also need to ensure that each Control Flow task is enlisted in the same transaction as its preceding Data Flow task.

Which three actions should you perform? (Each correct answer presents part of the solution.

Choose three.)

A - Change the TransactionOption property to Supported for the package.

B - Change the TransactionOption property to Required for the package.

C - Change the TransactionOption property to Supported for each Data Flow task.

D - Change the TransactionOption property to Required for each Data Flow task.

E - Change the TransactionOption property to Supported for each Control Flow task.

F - Change the TransactionOption property to Required for each Control Flow task.

Answer: A, D, E

Question: 2

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. The

package contains 30 Data Flow tasks and 30 Control Flow tasks. The package runs slower than

expected. You need to capture the start time the finish time and the elapsed time for the

validation and execution of the package. What should you do?

A - Enable the OnProgress event handler and use the Control Flow tasks to write the information to a log.

B - Monitor the Progress tab during the execution of the package, and then monitor the Execution Results tab.

C - Use the Performance Monitor tool to capture the counters from the SQL Server SSIS Service object. Analyze the output for the required information.

D - Use the Performance Monitor tool to capture the counters from the SQL Server: SSIS Pipeline object. Analyze the output for the required information.

Answer: B

Question: 3

Microsoft SQL Server Management Studio (SSMS) is installed on your workstation. Microsoft

Business Intelligence Development Studio (BIDS) is not installed on your workstation.

You need to create a package that must meet the following requirements:

It must be transactional.

It must be optimized for 20 tables.

It must be stored securely in the msdb database of a remote server.

What should you do?

A - Create the package by using DTS Designer.

B - Create the package by using the Package Migration Wizard.

C - Create the package by using the Microsoft SQL Server Import and Export Wizard.

D - On the Microsoft SQL Server 2005 Integration Services (SSIS) menu, click the Create Package submenu.

Answer: C

Question: 4

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. While testing, a Transact-SQL user-defined function causes duplicate key values that stop the transformation.

To permit the transformation to continue, the package must perform the following tasks:

1. Ascertain which rows are affected.
2. Insert the rows that fail into a table.
3. Continue with the process.

You need to change certain properties in the package to meet the requirements.

Which three tasks should you perform? (Each correct answer presents part of the solution.

Choose three.)

- A - Choose the Redirect Row option for the Error property on the key column.
- B - Choose the Ignore Failure option for the Error property on the key column.
- C - Choose the Fail Component option for the Error property on the key column.
- D - Add a DataReader source to use a new Data Flow destination when the Failure constraint is fired.
- E - Add a DataReader source to use a new Data Flow destination when the Completion constraint is fired.
- F - Edit the Error Output properties for each DataReader source and configure each data source for error handling.

Answer: A, D, F

Question: 5

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package.

The package uses at least one sequence container in one transaction. Each transaction controls a Data Flow task and a Control Flow task. Each Data Flow task has a Success constraint.

The Control Flow task follows the Success constraint. The package must include the following requirements:

Each Data Flow task must use its own transaction.

The Control Flow task and the Data Flow task that precedes it must succeed or fail as an atomic unit.

A restart point must restart each Data Flow task and the Control Flow task that follows it as an atomic unit.

You need to make changes in the control flow designer to meet the outlined requirements.

Which two actions should you perform? (Each correct answer presents part of the solution.

Choose two.)

- A - Add all the Data Flow tasks and the Control Flow tasks to one sequence container.
- B - Add a sequence container for each Control Flow task and the Data Flow task that precedes it.
- C - Change the FailPackageonFailure property to true for each new sequence container that is added to the package.
- D - Change the FailPackageonFailure property to false for each new sequence container that is added to the package.

Answer: B, C

Question: 6

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. An Analysis Services Processing task in the package requires data from a file. The file is exported to a file share.

If the file is not available on the file share, the Analysis Services Processing task must import data from a remote Microsoft SQL Server 2005.

You need to add steps to the package to import the data.

What should you do?

Set the **FailPackageOnFailure** property to **false**.

Set the **FailPackageOnFailure** property to **true**.

Add a Failure constraint between the File System task and a new Data Flow task that executes a query.

Add a Completion constraint between the File System task and a new Data Flow task that executes a query.

Add a Failure constraint between the File System task and the existing Analysis Services Processing task.

Add a new Analysis Services Processing task and connect it to the new Data Flow task.

Answer:

Set the **FailPackageOnFailure** property to **false**.

Add a Failure constraint between the File System task and a new Data Flow task that executes a query.

Add a new Analysis Services Processing task and connect it to the new Data Flow task.

Question: 7

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. The OLE DB data source for the package is a database that is updated frequently. You need to create a package that accomplishes the following tasks:
Implement the IRowsetFastLoad interface.
Support various data flow destinations.
Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A - Use an OLE DB data flow destination.
- B - Use a Recordset data flow destination.
- C - Use a DataReader data flow destination.

D - Create separate data flow destinations within the same Data Flow task.


Answer: A, D

Question: 8


Your company's business intelligence (BI) model uses Microsoft SQL Server 2005 Integration Services (SSIS). There are 20 packages that use the same configuration. The package configuration is stored in an XML file as a variable.

You need to track the changes that affect a package that uses one variable. You also need to modify the package to provide automatic notification by e-mail whenever there are changes to the variable.

What should you do?


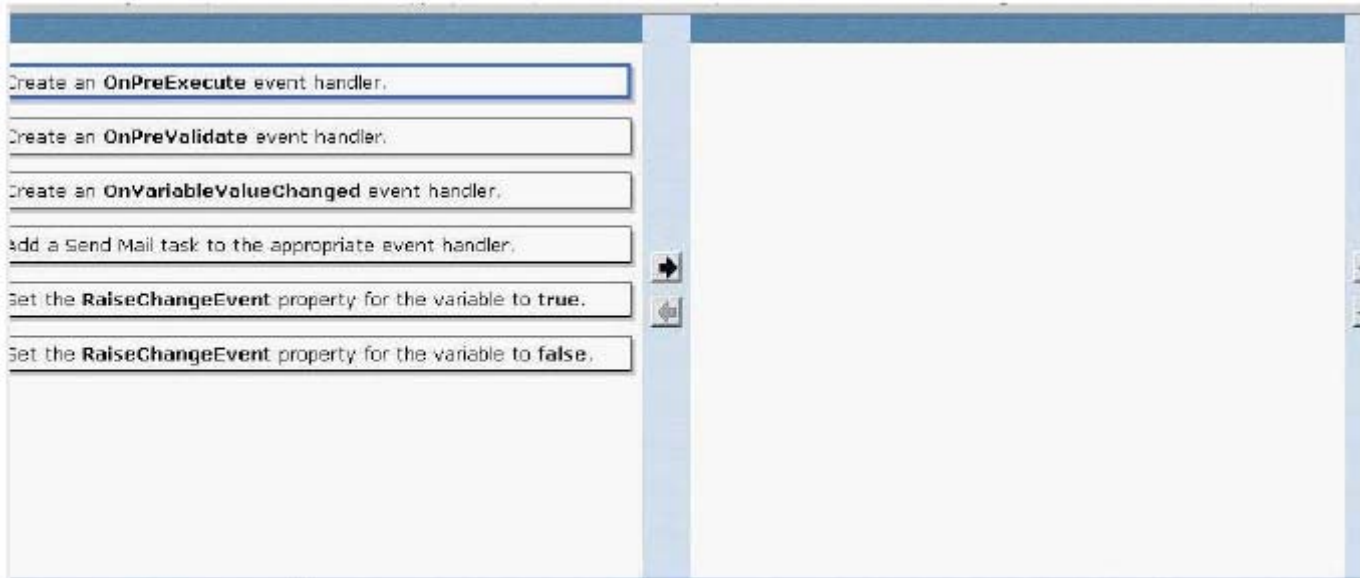


Answer:

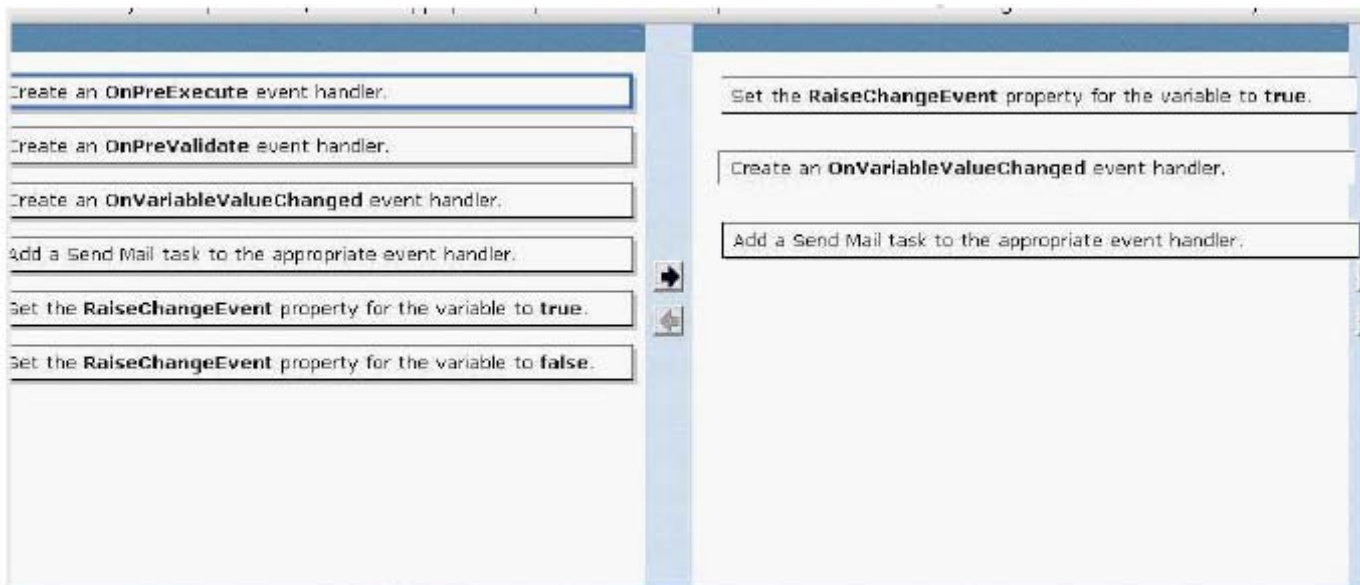

Question: 9

You are designing a Microsoft SQL Server Integration Services (SSIS) package. The package contains a single OLE DB data source. The package must be deployed on 10 servers. The package uses the XML configuration file to connect to a pre-assigned server. You need to ensure that the package uses the correct server at runtime. What should you do?

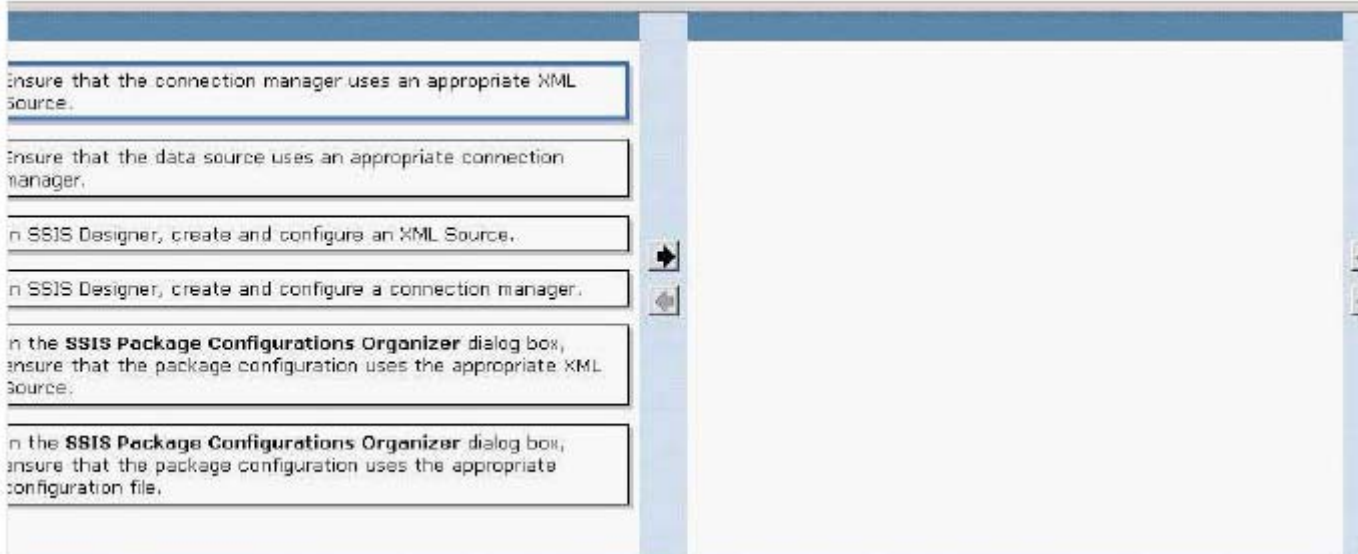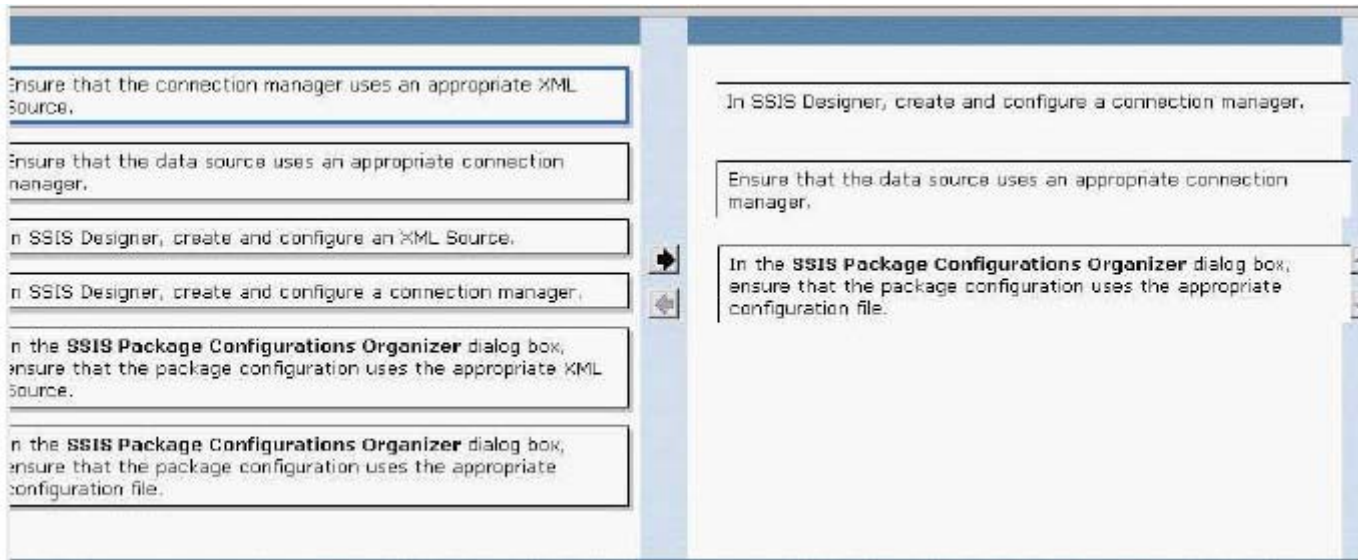**Answer:****Question: 10**

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. The package is named UpdateTable.dtsx and contains a variable named runID. The package must run by using the dtexec utility. The runID variable must be set at runtime to a value of 5. You need to meet the outlined requirements. What should you do?

A - Execute dtexec /F "c:\ssisPackages\UpdateTable.dtsx" /SET \packages.variables[runID].Value;5.

B - Execute dtexec /F "c:\ssisPackages\UpdateTable.dtsx" /SET \packages.variables.runID=5.
C - Create a text file that specifies the variable name and value in the format package.variables[runID].Value = 5. Execute dtexec /F "c:\ssisPackages\UpdateTable.dtsx" /COM <filename> where <filename> is the name of the file you just created.
D - Create a text file that specifies the variable name and value in the format runID=5. Execute dtexec /F "c:\ssisPackages\UpdateTable.dtsx" /COM <filename> where <filename> is the name of the text file you just created.

Answer: A

Question: 11

You create 25 Microsoft SQL Server 2005 Integration Services (SSIS) packages on the development server. You decide to deploy the SSIS packages on the test server. You need to create a repeatable process that will allow you to deploy the packages to the package store on the test server if the packages change. You also need to ensure that this is achieved with minimum effort. What should you do?

A - Use Microsoft SQL Server Business Intelligence Development Studio (BIDS) to save each package to the remote server.
B - Use the dtutil utility in a batch file to deploy each of the package .dtsx files to the remote server with the /Fi option.
C - Copy the Microsoft SQL Server Business Intelligence Development Studio (BIDS) files to the remote server and build the SSIS project on the remote server.
D - Create a package deployment utility in Microsoft SQL Server Business Intelligence Development Studio (BIDS) and use the Deployment Wizard to deploy all the packages.

Answer: D

Question: 12

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. You need to ensure that the package came from a trusted source. What should you do?

A - Change the CheckSignatureOnLoad property of the package to false.
B - Change the CheckSignatureOnLoad property of the package to true.
C - Create a certificate. Change the CheckSignatureOnLoad property of the package to false.
D - Create a certificate. Change the CheckSignatureOnLoad property of the package to true.

Answer: D

Question: 13

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. You create a table and populate the table with the required data. You receive an error message "destination table not found" when you run the package without the package destination objects. You need to set a package property that runs the package without giving the "destination table not found" error message when the configuration setting of the Connection Manager fails. Which package property should you set?

A - DelayValidation true
B - MaximumErrorCount = 2
C - DisableEventHandler = true
D - FailPackageonFailure = false

Answer: A

Question: 14

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. The package is connected to a database on your development server by using a connection manager. You decide to use the DTEXECUI utility to run the package. You need to change the connection of the connection manager to a different server at run time without using a package configuration file. What should you do?

- A - Specify an appropriate command file by using the Command Files dialog box.
- B - Specify an appropriate Connection String variable in the Set Values dialog box.
- C - Specify an appropriate package configuration by using the Configurations dialog box.
- D - Specify a different connection string for the connection manager by using the Connection Manager dialog box.

Answer: D

Question: 15

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) accounting report. Every other line of output in the report table must have a green background. You need to use the appropriate expression for the BackgroundColor property of the table. Which expression should you use?

- A - =Iif((RowNumber("Odd")), "Green", "White")
- B - =Iif((RowNumber(Nothing)), "Green", "White")
- C - =Iif((RowNumber(Nothing) MOD 2), "Green", "White")
- D - =Iif((RowNumber(InScope("Odd"))), "Green", "White")

Answer: C

Question: 16

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. The report must use a custom assembly to perform real-time lookup and currency conversion. The assembly has a static class named CurrencyConversion that exists in the namespace FinancialCalc. The class has a method named ToEUR that requires two arguments, Currency and CurrencyCode. You need to reference the ToEUR method in an expression to convert USD to EURO when the report runs. Which expression should you use?

- A - =Code.FinancialCalc.CurrencyConversion.ToEUR (Fields!Currency.Value, "USD")
- B - =Code!FinancialCalc.CurrencyConversion.ToEUR (Fields!Currency.Value, "USD")
- C - =FinancialCalc.CurrencyConversion.ToEUR (Fields!Currency.Value, "USD")
- D - =FinancialCalc!CurrencyConversion.ToEUR (Fields!Currency.Value, "USD")

Answer: C

Question: 17

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report model. Users must develop their own SSRS reports by using your report model in the Report Builder tool. The data source for the report model is a Microsoft SQL Server 2000 database that contains 900 tables and 700 views. You need to build a report model that allows users access to only the 10 tables that they require for reporting. What should you do?

- A - Select the Create roles rule when you generate the report model.
- B - Create a data source view and select the Restrict to Schema(s) option.
- C - Create a data source view and select only the required tables and views.
- D - Clear the Create entities for all tables rule when you generate the report model.

Answer: C

Question: 18

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. You notice that while printing a report, blank pages are printed after every page that contains the data. But the report appears correctly when you view it on screen. You need to ensure that the blank pages are not printed. Which report property should you use?

- A - Page Size
- B - Grid Spacing
- C - Interactive Size
- D - DataTransform

Answer: A

Question: 19

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. You create a report parameter named DisplayCol that contains the following properties:

Data Type: Integer

Prompt: Display Column

Available Values: Non-queried with the following Label/Value pairs:

oYes/1

oNo/0

Default Values: Null

The report parameter is used to control the visibility of the column.

You need to use the appropriate expression in the Hidden property for the column.

Which expression should you use?

- A - “=Parameters!DisplayCol.Value”
- B - “=Parameters!rc:DisplayCol.Value”
- C - “=Iif(Parameters!DisplayCol.Value=1,False,True)”
- D - “=Iif(Parameters!rc:DisplayCol.Value=1,False,True)”

Answer: C

Question: 20

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. The report is based on the multidimensional data from a Microsoft SQL Server 2005 Analysis Services (SSAS) cube. You need to use the Report Wizard to create a Matrix report by using the (Change Count] measure in the Details field. Which Multidimensional Expressions (MDX) query should you use?

- A - SELECT NON EMPTY { [Measures].[Change Count] } ON ROWS, DIMENSION PROPERTIES MEMBER_CAPTION ([Measures].[Change Count]) ON COLUMNS
- B - SELECT NON EMPTY { [Measures].[Change Count]} ON COLUMNS, DIMENSION PROPERTIES MEMBER_CAPTION ([Measures].[Change Count]) ON ROWS
- C - SELECT DIMENSION PROPERTIES MEMBER_CAPTION ([Measures].[Change Count]) ON ROWS
- D - SELECT DIMENSION PROPERTIES MEMBER_CAPTION ([Measures].[Change Count]) ON COLUMNS

Answer: B

Question: 21

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report that supports drilldown. You need to modify the report so that the detailed data is hidden when the report is initially rendered. What should you do?

- A - Add the detailed data to a Group. Set the Hidden property of the Group to true.
- B - Add the detailed data to a Matrix. Set the IsTogglechild property of the Matrix to true.
- C - Add the detailed data to a Subreport. Set the Hidden property of the Subreport to true.
- D - Add the detailed data to a Subreport. Set the IsToggleChild property of the Subreport to true.

Answer: A

Question: 22

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. The report uses a dataset that is constructed from an SQL table named Employees. The table has an employeeID field and a managerID field. The managerID field in each row represents the employeeID field.

You execute the following Transact-SQL query to get the dataset from the report:

```
SELECT CONVERT(varchar(255), c.FirstName + " " + c.LastName)
```

```
as Name,
```

```
e .EmployeeID,
```

```
e .ManagerID
```

```
FROM HumanResources.Employee AS e
```

```
JOIN Person.Contact AS c
```

```
ON e.ContactID = c.ContactID
```

You need to display the dataset as a hierarchical, organizational chart, as shown in the Exhibit.

1 of 7
Direct Report Structure
Ken Sánchez
David Bradley
Kevin Brown
Sariya Harnpadoungsataya
Mary Gibson
Jill Williams
Terry Eminhizer
Wanida Benshoof
John Wood
Mary Dempsey
Terri Duffy
Roberto Tamburello
Rob Walters
Gail Erickson
Josset Goldbèrg
Dylan Miller
Diane Margheim
Gigi Matthew
Michael Raheem
Ovidiu Cracium
Thierry D'Hers

What should you do?

- A - Use the Level function in the Left property of the Padding property of the cell.
- B - Group the report by the employeeID field and set the managerID field as the group parent.
- C - Group the report by the managerID field and set the employeeID field as the group parent.
- Use the Level function in the Left property of the Padding property of the cell.
- D - Group the report by the employeeID field and set the managerID field as the group parent.
- Use the Level function in the Left property of the Padding property of the cell.

Answer: D

Question: 23

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. The report has three columns in a table. The columns are named MachineName, MachineMtr, and MachineModel. The report navigation options must allow users to click on a row from the MachineName column and drill through to another report, and then pass the contents of the MachineName column as a parameter named MachineName. You need to configure the report navigation options to satisfy the user requirements. Which three tasks should you perform? (Each correct answer presents part of the solution. Choose three.)

- A - On the General tab, select the data region.
- B - On the Visibility tab, select the expression for the report item.
- C - On the Navigation tab1 select the report for the Hyperlink action.
- D - On the Navigation tab, select the bookmark for the Hyperlink action.
- E - On the Navigation tab, add an expression to the Hyperlink action parameters.
- F - On the Navigation tab, add the name and the value to the Hyperlink action parameters.

Answer: D, E, F

Question: 24

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. The report contains financial data. An input parameter named TargetMfr is present in the report. When a value in the Machine_Mfr field matches the selected value in the input parameter, the color of the output in a column is red. Otherwise, the color of the output is green. You need to set the TextBox that contains the color property of the Machine_Mfr field to the appropriate expression. Which expression should you use?

- A - =Iif(Fields!Machine_Mfr = Parameters!rc:TargetMfr.Value,"Red","Green")
- B - =Iif(Fields!Machine_Mfr.Value = Parameters!TargetMfr.Value,"Red","Green")
- C - =Iif(InScope(Machine_Mfr),"Red","Green")
- D - =Iif(InScope(TargetMfr),"Red","Green")

Answer: B

Question: 25

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report, The query that builds the dataset for the report uses a WHERE clause to filter the rows. The report parameter must perform the following actions:
Use the new parameterized query.
Run without any user input.
Allow users to change the value that is passed to the query by selecting a value from a dropdown list.
You need to modify the settings of the Report Properties dialog box to meet the outlined requirements.
Which four tasks should you perform? (Each correct answer presents part of the solution. Choose four.)

- A - Ensure that the Internal check box is selected.
- B - Ensure that the Default values property value is set to Null.
- C - Ensure that the Prompt property is set to an appropriate value.
- D - Ensure that the Data type property is set to an appropriate value.
- E - Ensure that the Default values property value is set to Non-queried by using an appropriate default value.
- F - Ensure that the Available values property value is set to Non-queried by using the appropriate labels and values.

Answer: C, D, E, F

Question: 26

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project. The project contains a cube named Finance. The Finance cube contains the following objects:

A measure group named SalesMeasures.

A measure named SalesAmount.

A time dimension named DimTime.

A time dimension hierarchy named Calendar that contains Year on the first level, Quarter on the second level, and Month on the third level.

You need to create a trend expression that displays the increase and decrease in the SalesAmount measure for the current DimTime member, irrespective of the level of the Calendar hierarchy.

Which expression should you use?

A - Case

When

[SalesMeasures].[SalesAmount]>

[SalesMeasures].[SalesAmount],[DimTime].[Calendar].PrevMember

Then 1

When

[SalesMeasures].[SalesAmount]<

[SalesMeasures].[SalesAmount],[DimTime].[Calendar].PrevMember

Then -1

End

B - Case

When

[SalesMeasures].[SalesAmount][DimTime].Calendar<

[SalesMeasures].[SalesAmount],[DimTime].[Calendar].PrevMember

Then 1

When

[SalesMeasures].[SalesAmount].[DimTime][Calendar]>

[SalesMeasures].[SalesAmount].[DimTime].[Calendar].PrevMember

Then -1

End

C - Case

When

[SalesMeasures].[SalesAmount]>

[SalesMeasures].[SalesAmount],[DimTime].[Calendar].NextMember

Then -1

When

[SalesMeasures].[SalesAmount]<

[SalesMeasures].[SalesAmount].[DimTime].[Calendar].NextMember

Then -1

End

D - Case

When

[SalesMeasures].[SalesAmount]<

[SalesMeasures].[SalesAmount],[DimTime].[Calendar].NextMember

Then -1

When

[SalesMeasures].[SalesAmount]>

[SalesMeasures].[SalesAmount],[DimTime].[Calendar].NextMember

Then -1

End

Answer: A

Question: 27

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project.

You create a cube that contains the following objects:

A time dimension named Time that has an attribute named Timekey.

A fact table named FactOrders.

The Time dimension contains different hierarchies. Two of the columns of the fact table link to the attribute. You need to view the measures for different hierarchies for both the columns in the fact table.

What should you do?

A - Create a single dimension usage relationship between the Time dimension and the FactOrders fact table by defining a regular relationship.

B - Create a single dimension usage relationship between the Time dimension and the FactOrders fact table by defining a many-to-many relationship.


C - Create two dimension usage relationships between the Time dimension and the FactOrders fact table by defining a regular relationship for both the dimension usages.

D - Create two dimension usage relationships between the Time dimension and the FactOrders fact table by defining a many-to-many relationship for both the dimension usages.

Answer: C

Question: 28

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project. The data source for a cube has tables as shown in the following exhibit.

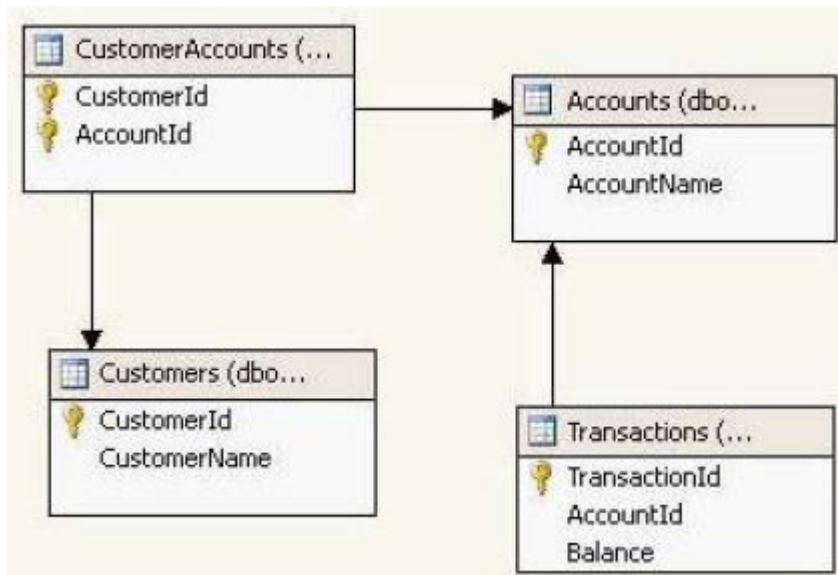

The cube contains the following objects:

A dimension named DimAccounts that uses a table named Accounts.

A dimension named DimCustomers that uses a table named Customers.

A measure group named Transactions that uses a fact table named Transactions.

A measure group named Customer Accounts that uses a fact table named CustomerAccounts.

You need to create a cube dimension to browse through the measures in the Transactions fact table by using the DimCustomers dimension.

What should you do?

A - Create a referenced relationship and set the intermediate dimension as DimAccounts.

B - Create a referenced relationship and set the intermediate dimension as DimCustomers.
C - Create a many-to-many relationship and set the intermediate measure group to Transactions.
D - Create a many-to-many relationship and set the intermediate measure group to Customer Accounts.

Answer: D

Question: 29

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project. You create a cube named ExpenseData that uses a dimension named Expense.

The Expense dimension is a parent-child dimension with:

a key attribute named Expense.

a parent attribute named Expenses of type Expense.

The project contains a role named Users.

You need to modify the Users role to achieve the following tasks:

Restrict role members from viewing the cell values of Expenses under the expense Managerial Expenses. Ensure that all the labels for the Expense dimension are visible.

What should you do?

A - Change the access to Read/Write for dimension Expense for the ExpensesData cube.

B - On the Cell Data tab, select the Enable read permissions check box. Enter the [Expense].[Expenses].Parent.Name<>"Managerial Expenses" expression.

C - On the Cell Data tab, select the Enable read permissions check box. Enter the [Expense].[Expenses].Parent.Name="Managerial Expenses" expression.

D - On the Dimension Data tab, select the dimension Expense in the ExpensesData cube in the Dimension drop-down box, and then cancel the selection of all the members under the member Managerial Expenses.

Answer: B

Question: 30

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project. You create a dimension that contains a parent-child hierarchy. The dimension has a key attribute named Employee and a parent attribute named Employees. You need to ensure that the dimension identifies the topmost employee member of the hierarchy as the root member. What should you do?

A - Set the IsAggregatable property of the Employee attribute to true.

B - Set the IsAggregatable property of the Employee attribute to false.

C - Set the IsAggregatable property of the Employees attribute to true.

D - Set the IsAggregatable property of the Employees attribute to false.

Answer: D

Question: 31

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project. You create a cube that uses a dimension named DimEmployee. The dimension contains an attribute named Employee. You also host a Microsoft SQL Server 2005 Reporting Services (SSRS) project that contains a parameterized report on an employee. You need to create an action to view the report. What should you do?

A - Create a URL action on the Employee attribute.

B - Create a Rowset action on the Employee attribute.

C - Create a URL action on the DimEmployee dimension.

D - Create a Rowset action on the DimEmployee dimension.

Answer: A

Question: 32

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project.

You create a cube with the following objects:

A time dimension named Time.

A fact table that contains two columns named Order Date Key and Numbers of Orders.

A Number of Orders measure added to a measure group named Measures.

The cube has a dimension usage named Order Date that links the Order Date Key column to the Time dimension.

You need to create a Multidimensional Expressions (MDX) calculation that displays the

cumulative totals of the Number of Orders column for all hierarchies in the Order Date dimension.

Which MDX expression should you use?

A - SUM([Order Date].[Calendar].CurrentMember,
[Measures].[Number of Orders])

B - SUM(
PeriodsToDate([Order Date].[Calendar].CurrentMember.Parent.Level,
[Order Date].[Calendar].CurrentMember),
[Measures].[Number of Orders])

C - SUM(
PeriodsToDate([Order Date].[Calendar].CurrentMember.Parent,
[Order Date].[Calendar].CurrentMember),
[Measures].[Number of Orders])

D - SUM([Order Date].[Calendar].CurrentMember,SUM
([Order Date].[Calendar].CurrentMember.Parent,
[Measures].[Number of Orders]))

Answer: B

Question: 33

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project. The project

has a fact table named FactOrders that contains columns named Order Amount, Country, and

Order Date Key. You create the first partition for the fact table with the Source property set to

“Select * from FactOrders where [Order Date Key]>354 or Country=’USA’”. You need to create the

second partition for the fact table to ensure accurate results when queried. What should you do?

A - Create a partition with the Source property set to “Select * from FactOrders where [Order
Date Key]<=354 and Country<>’USA’”.

B - Create a partition with the Source property set to “Select * from FactOrders where [Order
Date Key]<=354”.

C - Create a partition with the Source property set to “Select * from FactOrders where
Country<>’USA’”.

D - Create a partition with the Source property set to “Select * from FactOrders”.

Answer: A

Question: 34

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project.


You create a cube that has the following objects:

A dimension named ProductSubcategory that contains a table named DimProductSubcategory.

A dimension named Product that contains a table named DimProduct.

A fact table named FactInventory.

The relationship between the three tables is shown in the following exhibit.

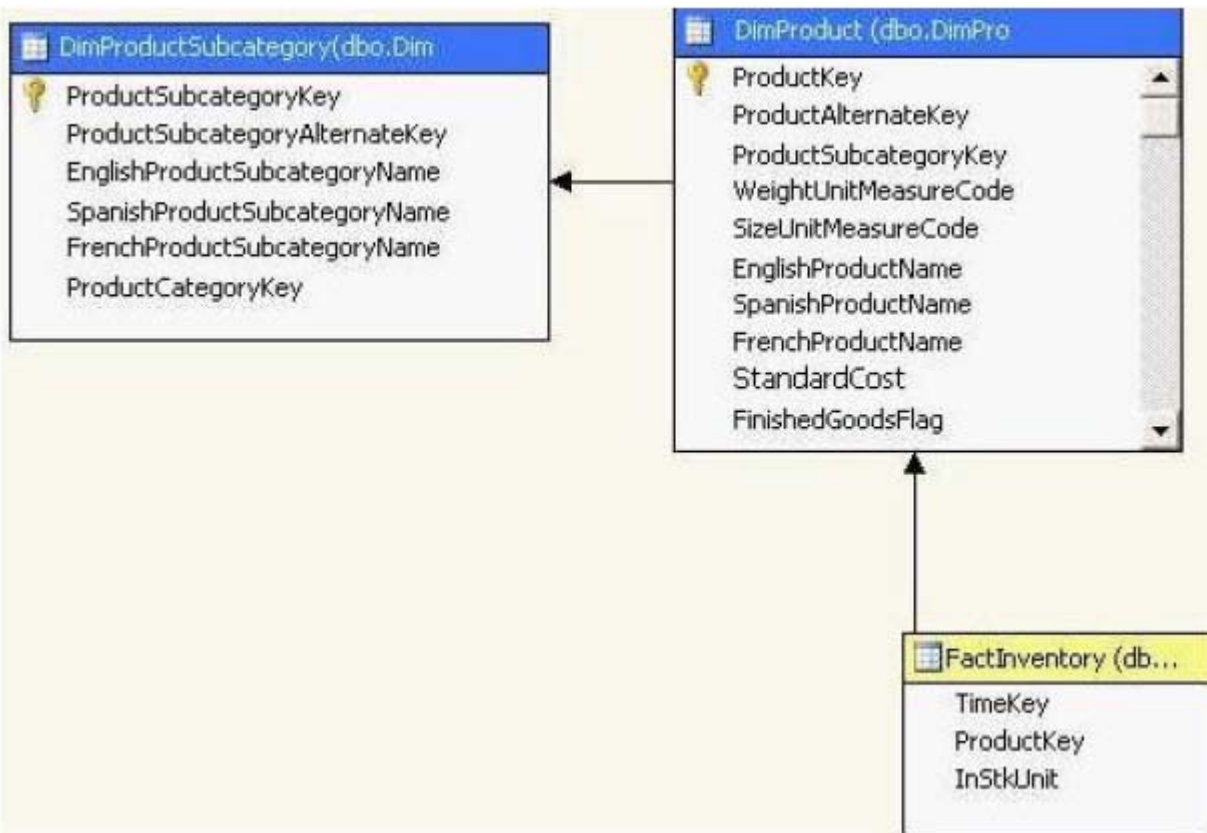

You need to create a relationship on the Dimension Usage tab to browse through the data in the FactInventory table by using only the ProductSubcategory dimension. What should you do?

- A - Create a fact relationship in the FactInventory table.
- B - Create a regular relationship between the ProductSubcategory dimension and the FactInventory table.
- C - Create a referenced relationship between the ProductSubcategory dimension and the FactInventory table.
- D - Create a many-to-many relationship between the ProductSubcategory dimension and the FactInventory table.

Answer: C

Question: 35

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project.

Your data source contains the following tables:

Products table with a column named Productcategories_ID

ProductCategories table with a column named ID

The ProductCategories ID column is used to link to the ID column. You create a data source view with the RetrieveRelationships property set to false. You need to set the NameMatchingCriteria property of the data source view to an option to create a relationship between the two tables. Which option should you use?

- A - (none)
- B - Same name as primary key
- C - Same name as destination table name
- D - Same name as destination table name + primary key name

Answer: D

Question: 36

You are managing a Microsoft SQL Server 2005 Analysis Services (SSAS) instance. You deploy a data mining structure that includes the Microsoft Clustering mining model. You need to change the properties of the mining model from Scalable K-Means to Non-scalable K-Means. Which parameter of the mining model should you change?

- A - MODELLING_CARDINALITY
- B - CLUSTERING_METHOD
- C - CLUSTER_SEED
- D - CLUSTER_COUNT

Answer: B

Question: 37

You are designing a Microsoft SQL Server 2005 Analysis Services (SSAS) solution. A business unit requires a data mining dimension for its cube.

You need to build the dimension to accomplish the following tasks by using the Data Mining Wizard.

Predict the quantity of measures in the cube.

Allow the use of the data mining dimension in Data Mining Expressions (DMX) prediction queries.

What should you do?

Choose a data mining structure.


Choose a data mining model.

Create a slice of the source cube for the training data.

Select the case key from the measure group.

Select the case key from the dimension and a case level column from a measure group.

Answer:

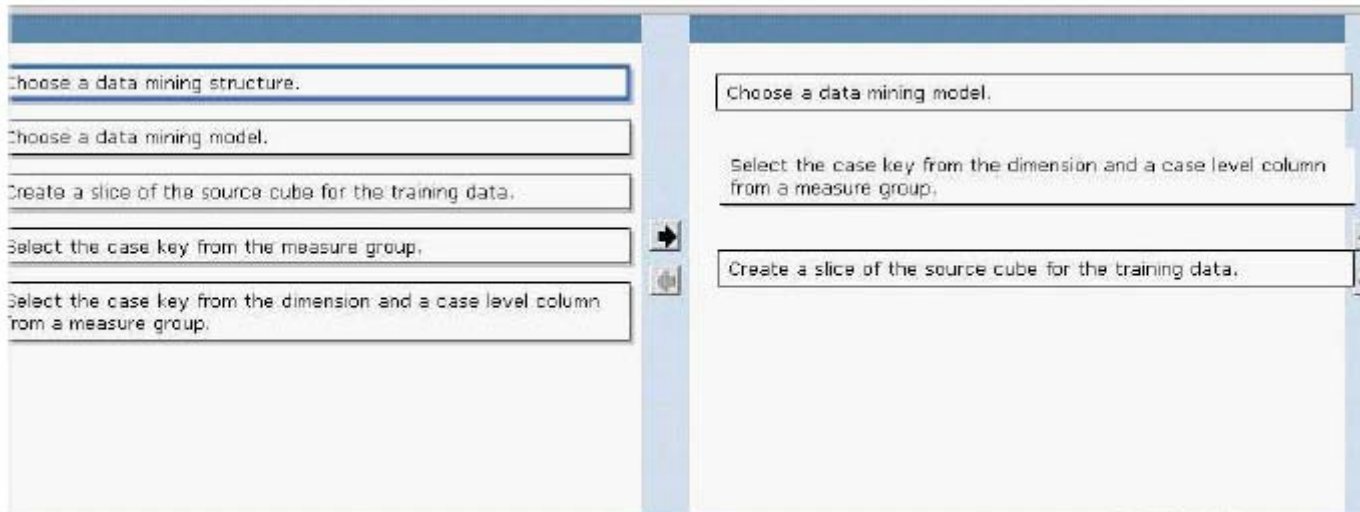

Question: 38

You are managing a Microsoft SQL Server 2005 Analysis Services (SSAS) instance. You want to change the design of the data mining structure to test different data mining theories. You add columns of the Ordered content type in the data mining model and the underlying case table. You need to ensure that Data Mining Viewer reflects the changes in the data mining structure and the data mining model. Which process option should you choose?

- A - ProcessFull
- B - ProcessData
- C - ProcessStructure
- D - ProcessIncremental

Answer: A

Question: 39

You are designing a Microsoft SQL Server 2005 Analysis Services (SSAS) solution. The SSAS database includes a data mining model that uses the Microsoft Neural Network algorithm. You use Prediction Query Builder in Microsoft SQL Server Management Studio (SSMS) to build the Data Mining Extensions (DMX) queries for the database. You need to write a query that returns the number of cases in the data mining model and the percentage of the sample cases that fit the model. Which Prediction Query Builder field configuration should you use?

- A - A PredictAssociation field that uses a Prediction Function source.
- B - A PredictHistogram field that uses a Prediction Function source.
- C - A PredictAssociation field that uses the data mining model source.
- D - A PredictHistogram field that uses the data mining model source.

Answer: B

Question: 40

You are designing a data mining structure for a Microsoft SQL Server 2005 Analysis Services (SSAS) solution. The data mining structure must forecast the day of the month on which a combination of products are most likely to sell. You need to configure properties for the Day of Month column within a data mining solution. What should you do?

- A - Set the Content type of the column as Cyclical in the data mining structure and the column as

Input in the data mining model.

B - Set the Content type of the column as Key Time in the data mining structure and the column as Input in the data mining model.

C - Set the Content type of the column as Cyclical in the data mining structure and the column as Predictable in the data mining model.

D - Set the Content type of the column as Key Time in the data mining structure and the column as Predictable in the data mining model.

Answer: C

Question: 41

You are analyzing a data mining structure by using Business Intelligence Development Studio (BIDS). You change the settings on the Data Mining Accuracy Chart tab. What changes should you expect in both the profit chart and the lift chart?

A - The trends in both the lift chart and the profit chart will change.

B - The trends in both the lift chart and the profit chart will remain the same.

C - The trends in the lift chart will remain the same but the trends in the profit chart will change.

D - The trends in the profit chart will remain the same but the trends in the lift chart will change.

Answer: C

Question: 42

You are administering a Microsoft SQL Server 2005 Reporting Services (SSRS) instance. You need to assign a group of users a predefined security role that permits them to read all the report definitions. Which role should you assign to the group?

A - Browser

B - Publisher

C - My Reports

D - Content Manager


Answer: D

Question: 43


You are managing a Microsoft SQL Server 2005 Reporting (SSRS) instance. The report server hosts a report name Global Financials. The Global Financials report allow user to view different geographical regions of the world and has a default view of Europe.

You need to create another version of the report that has a default view of North America.

What should you do?

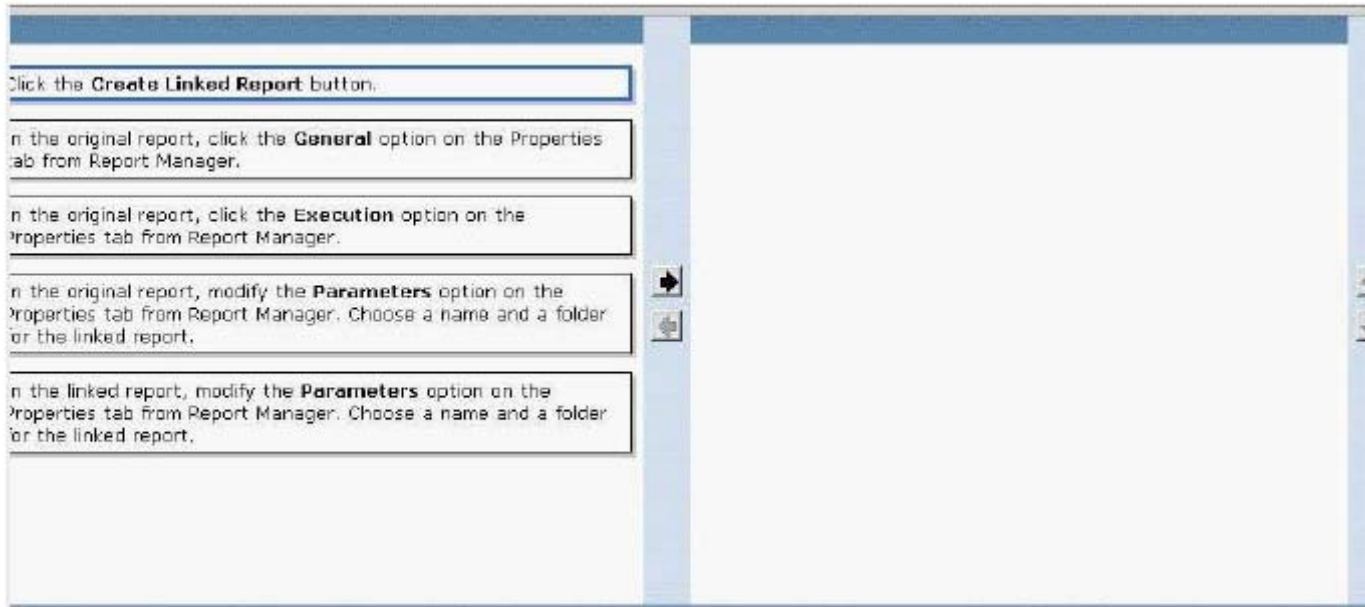

Answer:

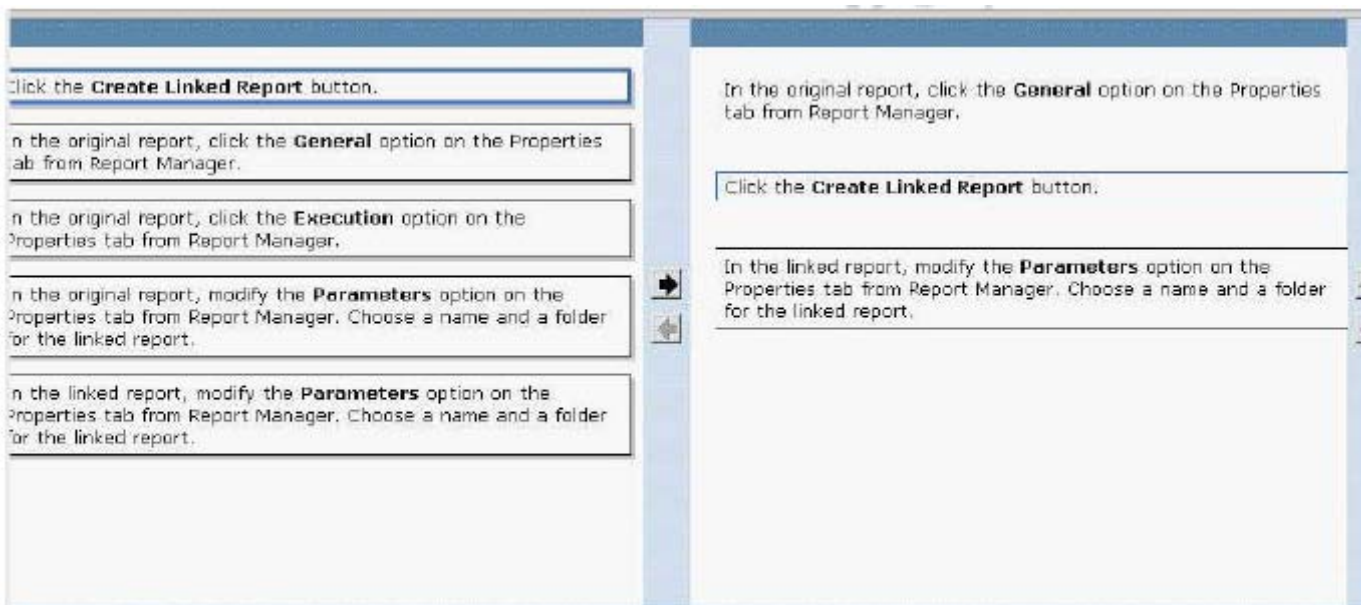

Question: 44

You are creating a Microsoft SQL Server 2005 Reporting Services (SSRS) report. You deploy a new report by using Business Intelligence Development Studio (BIDS) from a test environment. Previously deployed reports display errors indicating unavailable production servers. You need to modify the SSRS project by using BIDS to allow the previously deployed data sources to work properly. What should you do?

A - Create a new data source in BIDS by using production servers. Deploy the data source to a new folder with a different name.

B - Create a new data source in BIDS by using production servers. Deploy the affected reports to

a new folder with a different name.

C - Change the project data source to use production servers. Configure the deployment by setting the Over write Data Sources property in BIDS to true and redeploy the project.

D - Change the project data source to use production servers. Configure the deployment by setting the Over write Data Sources property in BIDS to false and redeploy the project.

Answer: C

Question: 45

You are managing a Microsoft SQL Server 2005 Reporting Services (SSRS) solution. The current reporting solution consists of a single computer that hosts both the Web server components and the database server components of SSRS. This computer is dedicated to the sales department. The company security policy requires a separate SSRS solution for the payroll department. There is no budget for any new hardware. You need to isolate the security models of each department without using separate Web servers or database servers. What should you do?

A - Create two sets of site-level roles for each department. Use the same database for both the departments.

B - Create two sets of site-level roles for each department. Create a new data source to store the data of the payroll department.

C - Install another instance of the Reporting Services Web service on the computer by using a different URL. Use the same database for both the departments.

D - Install another instance of the Reporting Services Web service on the computer by using a different URL. Create a new set of databases to store the data of the payroll department.

Answer: D

Question: 46

You are managing a Microsoft SQL Server 2005 Reporting Services (SSRS) instance.

You need to perform the following tasks:

Permit data sources to use the No credentials option.

Access Report Manager by using Secure Sockets Layer (SSL).

Which two actions should you perform? (Each correct answer presents part of the solution.

Choose two.)

A - Use the Reporting Services Configuration tool to set the domain name, user, and password for the unattended execution account.

B - Open the RSReportServer.config file for the SSRS instance and enter the domain name, user, and password for the unattended execution account.

C - Open the Web.config file for Report Manager and set the origin Url attribute of the <trust> property to the fully qualified domain name of the server for which the certificate is issued.

D - Open the RSReportServer.config file for the SSRS instance and set the <InstanceID> property to the fully qualified domain name of the server for which the certificate is issued.

E - Open the RSWebApplication.config file for the SSRS instance and set the <ReportServerUrl> property to the fully qualified domain name of the server for which the certificate is issued.

Answer: A, E

Question: 47

You are managing a Microsoft SQL Server 2005 Reporting Services (SSRS) instance.

The following events must occur at 2:00 on every Sunday:

A data-driven subscription for the Human Resources report must write to several file shares.

The execution of the Sales report must expire.

The history of the Manufacturing report must include a new state of the data.

You need to configure the package so that the events occur and are exposed for a single-step batch job.

What should you do?

- A - Use a shared schedule and start the SQL Agent service on the SSRS database server.
- B - Use a shared schedule and disable the SQL Agent service on the SSRS database server.
- C - Use a report-specific schedule for each task and start the SQL Agent service on the SSRS database server.
- D - Use a report-specific schedule for each task and disable the SQL Agent service on the SSRS database server.

Answer: A

Question: 48

You are managing a Microsoft SQL Server 2005 Reporting Services (SSRS) instance. You have deployed a Microsoft SQL Server 2005 Analysis Services (SSAS) based data source named PhoneMetrics that accesses the PhoneMetrics cube. You need to permit clients to create ad hoc reports from the Web. What should you do?

- A - Run Report Builder from the Report Manager home page. Access the PhoneMetrics data source to create a report model.
- B - Start Report Manager. Go to the PhoneMetrics data source and click the Generate Model button to deploy the report model.
- C - Start Microsoft Business Intelligence Development Studio (BIDS). Create an SSAS project and import the PhoneMetrics data source to create a report model.
- D - Start Microsoft Business Intelligence Development Studio (BIDS). Create a Report Model project and import the PhoneMetrics data source to create a report model.

Answer: B

Question: 49

You are managing a Microsoft SQL Server 2005 Analysis Services (SSAS) instance. The instance contains cubes that use the HOLAP storage mode. The retrieval of data from the cubes is slow. You need to monitor the frequency with which the users access a member of each cell in a cube in System Monitor. What should you do?

- A - In the Storage Engine Queries object, monitor the Current measure group queries counter.
- B - In the Storage Engine Queries object, monitor the Current dimension queries counter.
- C - In the Connection object, monitor the Current user sessions counter.
- D - In the Connection object, monitor the Current connection counter.

Answer: A

Question: 50

You are managing a Microsoft SQL Server 2005 Analysis Services (SSAS) instance. You have a cube in an SSAS instance. You notice that the queries run slowly. You need to identify the queries that run slowly and change the storage configuration of the cube. What should you do?

- A - Run the Cube Storage Wizard to analyze and design aggregations.
- B - Run the Usage-Based Optimization Wizard to analyze and design aggregations.
- C - Use SQL Profiler to examine the execution plans to analyze and design aggregations.
- D - Modify the Data Source Impersonation Info property of the Analysis Services database.

Answer: B

Question: 51

You are designing Microsoft SQL Server 2005 Analysis Services (SSAS) cubes for two business units. Each business unit has the following requirements:
Full administrative access only to its own cubes and not to the cubes of the other unit.
Ability to run its cubes on a different computer in the event of a hardware failure.
You need to install SSAS in a configuration to create cubes that meet the above requirements.
Which instance should you use?

- A - Two clustered instances
- B - A single clustered instance
- C - Two nonclustered instances
- D - A single nonclustered instance

Answer: A

Question: 52

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) solution by using Business Intelligence Development Studio (BIDS). The SSAS instance runs under a local system account. A trust relationship exists between the machine that hosts the SSAS instance and the data source. You need to use the Impersonation Information dialog box to create a data source that SSAS can connect to when SSAS is deployed from any workstation. Which impersonation information should you use?

- A - Default
- B - Service account
- C - Credentials of the current user
- D - Specific user name and password

Answer: D

Question: 53

You are managing a Microsoft SQL Server 2005 Analysis Services (SSAS) instance. You have a machine named COMPANYCUBE for a SSAS instance. The COMPANYCUBE machine hosts a SSAS database that has a cube named HR. You need to restrict the local administrators from accessing any data stored in the HR cube. What should you do?

- A - Remove all the local administrators from the membership in the server role.
- B - Change the Security\BuiltInAdminsareServerAdmins property of the SSAS instance to false.
- C - Create a role called AdminRole. Set the Access to the HR cube to None. Add the local administrators to the role.
- D - Remove the local administrators from the SQLServer2005MSOLAPUser\$COMPANYCUBE\$MSSQLSERVER local group.

Answer: B

Question: 54

You are administering a Microsoft SQL Server 2005 Reporting Services (SSRS) instance. You need to assign a group of users a predefined security role that permits them to read all the report definitions. Which role should you assign to the group?

- A - Browser
- B - Publisher
- C - My Reports
- D - Content Manager

Answer: D

Question: 55

You administer a Microsoft SQL Server 2005 Reporting Services (SSRS) instance. You need to edit the items that are included within the <Extension> subelement of the <Render> element in the RSReportServer.config file so that all the reports render only to Microsoft Excel. What should you do?

- A - Set the value of the Type attribute to render where the value of the Name attribute is equal to EXCEL.
- B - Set the value of the Visible attribute to false where the value of the Name attribute is not equal to EXCEL.
- C - Set the value of the Type attribute to prevent where the value of the Name attribute is not equal to EXCEL.
- D - Add an Override Names subelement to the extension element where the value of the Name attribute is not equal to EXCEL.

Answer: B

Question: 56

You are managing a Microsoft SQL Server 2005 Reporting Services (SSRS) solution. The current reporting solution consists of a single computer that hosts both the Web server components and the database server components of SSRS. This computer is dedicated to the sales department. The company security policy requires a separate SSRS solution for the payroll department. There is no budget for any new hardware. You need to isolate the security models of each department without using separate Web servers or database servers. What should you do?

- A - Create two sets of site-level roles for each department. Use the same database for both the departments.
- B - Create two sets of site-level roles for each department. Create a new data source to store the data of the payroll department.
- C - Install another instance of the Reporting Services Web service on the computer by using a different URL. Use the same database for both the departments.
- D - Install another instance of the Reporting Services Web service on the computer by using a different URL. Create a new set of databases to store the data of the payroll department.

Answer: D

Question: 57

You are creating a Microsoft SQL Server 2005 Reporting Services (SSRS) report. You deploy a new report by using Business Intelligence Development Studio (BIDS) from a test environment. Previously deployed reports display errors indicating unavailable production servers. You need to modify the SSRS project by using BIDS to allow the previously deployed data sources to work properly. What should you do?

- A - Create a new data source in BIDS by using production servers. Deploy the data source to a new folder with a different name.
- B - Create a new data source in BIDS by using production servers. Deploy the affected reports to a new folder with a different name.
- C - Change the project data source to use production servers. Configure the deployment by setting the Over write Data Sources property in BIDS to true and redeploy the project.
- D - Change the project data source to use production servers. Configure the deployment by setting the Over write Data Sources property in BIDS to false and redeploy the project.

Answer: C

Question: 58


You are administering a Microsoft SQL Server 2005 Reporting Services (SSRS) solution. SSRS is installed on 10 Web servers in a Network Load Balancing configuration. When the SSRS service starts, only the first Web server makes connections to the Report Server database. You need to connect additional Web servers in the SSRS Web farm. What should you do?

- A - Edit the <UrlRoot> configuration setting that is used in the RSReportServer.config file for each Web server to point to the first Web server in the Web farm.
- B - Edit the unattended account settings in the RSReportServer.config file for each Web server to use a domain account.
- C - Use the Reporting Services Configuration Manager tool. Configure each Web server to connect to the Report Server database. Connect to each Web server and configure the first Web server as Report Server Virtual Directory.
- D - Use the Reporting Services Configuration Manager tool. Configure each Web server to connect to the Report Server database. Return to the first Web server to initialize each subsequent server into the Web farm.


Answer: D

Question: 59

You are managing a Microsoft SQL Server Reporting Services (SSRS) instance. The report server host a report name Global Financials. The Global Financials report allow users to view different geographical regions of the world and has a default view of Europe. You need to create another version of the report that has a default view of North America. What should do you?

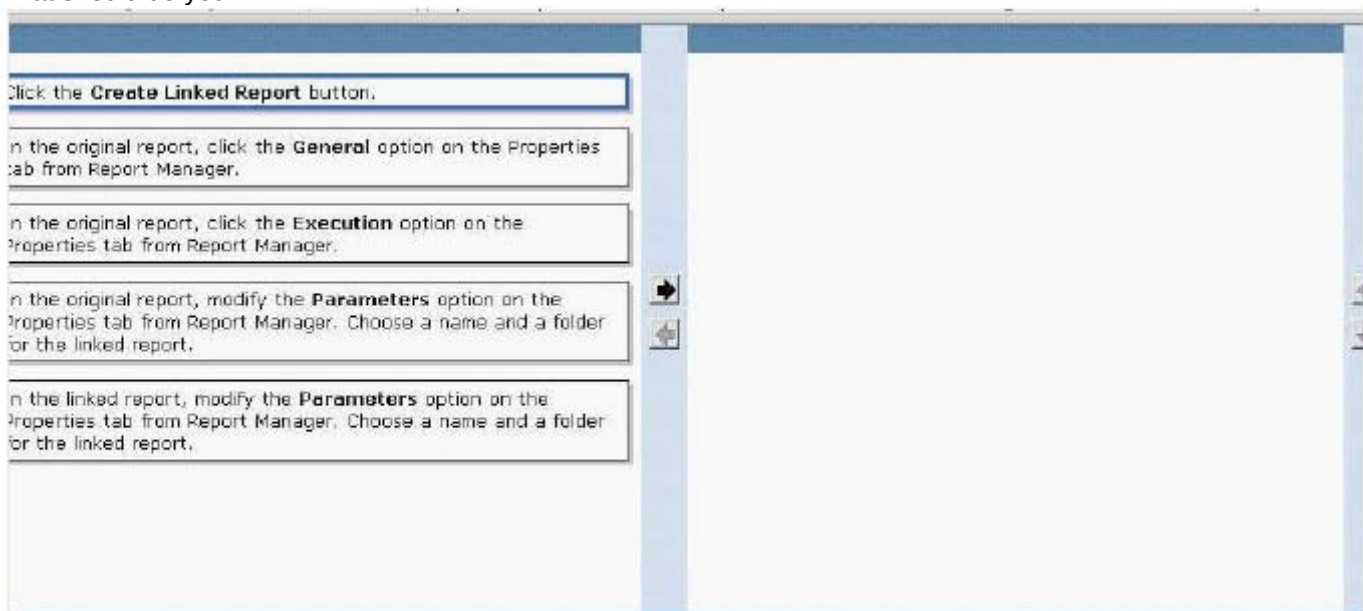

Answer:

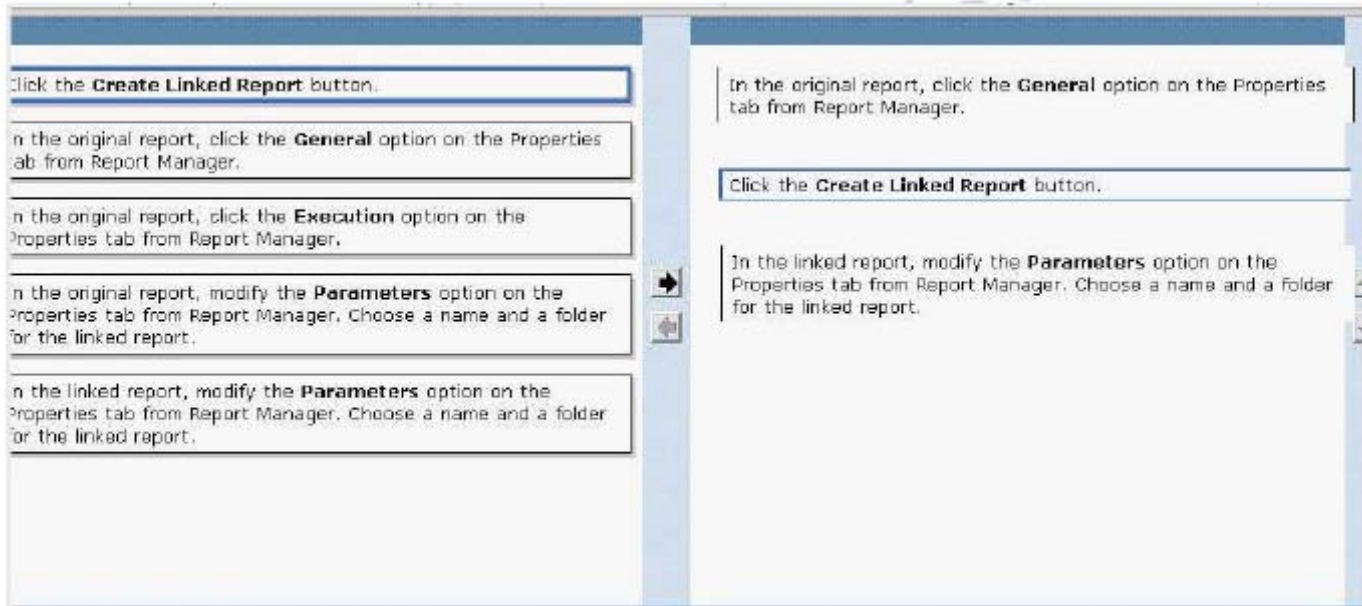

Question: 60


You are managing a Microsoft SQL Server 2005 Reporting Services (SSRS) instance. You have deployed a Microsoft SQL Server 2005 Analysis Services (SSAS) based data source named PhoneMetrics that accesses the PhoneMetrics cube. You need to permit clients to create ad hoc reports from the Web. What should you do?

- A - Run Report Builder from the Report Manager home page. Access the PhoneMetrics data source to create a report model.
- B - Start Report Manager. Go to the PhoneMetrics data source and click the Generate Model button to deploy the report model.
- C - Start Microsoft Business Intelligence Development Studio (BIDS). Create an SSAS project and import the PhoneMetrics data source to create a report model.
- D - Start Microsoft Business Intelligence Development Studio (BIDS). Create a Report Model project and import the PhoneMetrics data source to create a report model.


Answer: B

Question: 61

You are designing a Microsoft SQL Server Analysis Services (SSAS) solution. Your business unit requires data mining on tables that are located in two separate Microsoft SQL Server 2005 database servers. One server hosts child records in the Customers table. The other server hosts parent records in the Customer Transactions table. You need to use the Data Mining Wizard to implement a data mining structure. The mining structure must accomplish the following tasks:
Build the metadata that is necessary to integrate the two servers.
Implement the Microsoft Time Series algorithm and the Microsoft Naïve-Bayes algorithm by using the same tables.
Which actions should you perform?

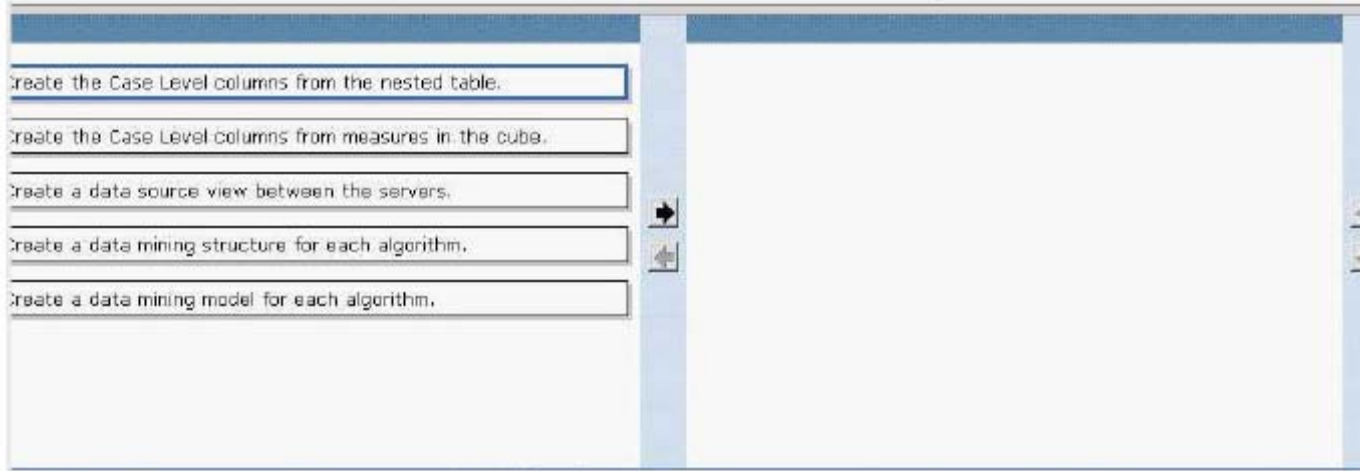

Answer:

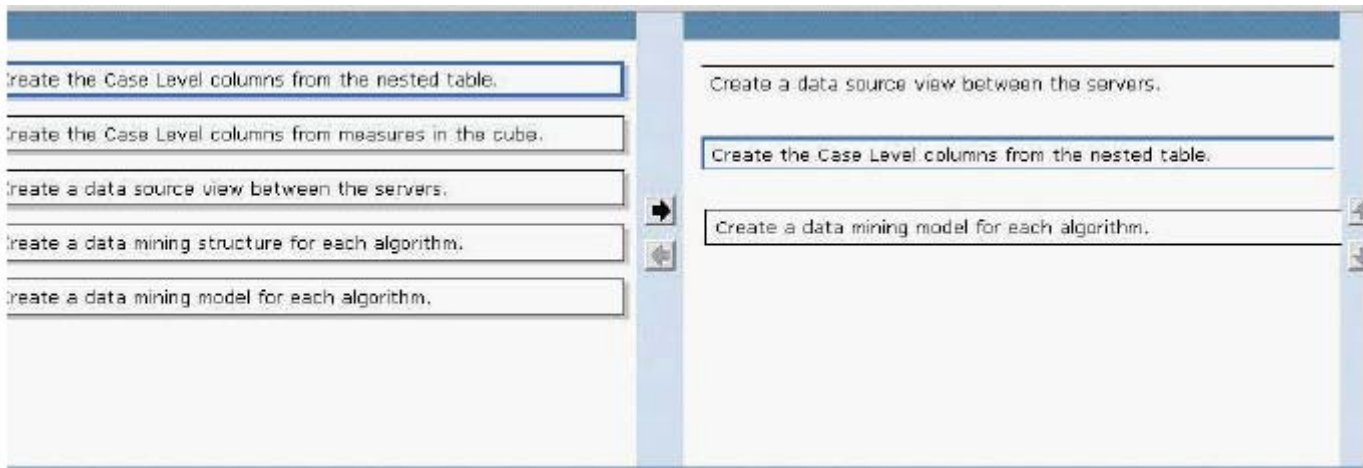

Question: 62

You are analyzing a data mining structure that is hosted on a Microsoft SQL Server 2005 Analysis Services (SSAS) instance. You view the classification matrix for a data mining structure mining structure as shown in the following exhibit.

Counts for TM Decision Tree on [Bike Buyer]:

Predicted	0 (Actual)	1 (Actual)
0	6657	2339
1	2695	6793

Counts for TM Clustering on [Bike Buyer]:

Predicted	0 (Actual)	1 (Actual)
0	6411	4521
1	2941	4611

Counts for TM Naive Bayes on [Bike Buyer]:

Predicted	0 (Actual)	1 (Actual)
0	5963	3412
1	3389	5720

Counts for TM Neural Net on [Bike Buyer]:

Predicted	0 (Actual)	1 (Actual)
0	6118	2889
1	3234	6243

- A - TDTree
- B - TMClust
- C - TMNBaye
- D - TMNet


Answer: B

Question: 63


You are designing a Microsoft SQL Server 2005 Analysis Services (SSAS) instance. You decide to redesign a data mining structure.

You need to ensure that Data Mining Viewer reflects the change in the data mining structure. You want to achieve this goal by updating the data mining structure without changing any dependent models.

What should you do?

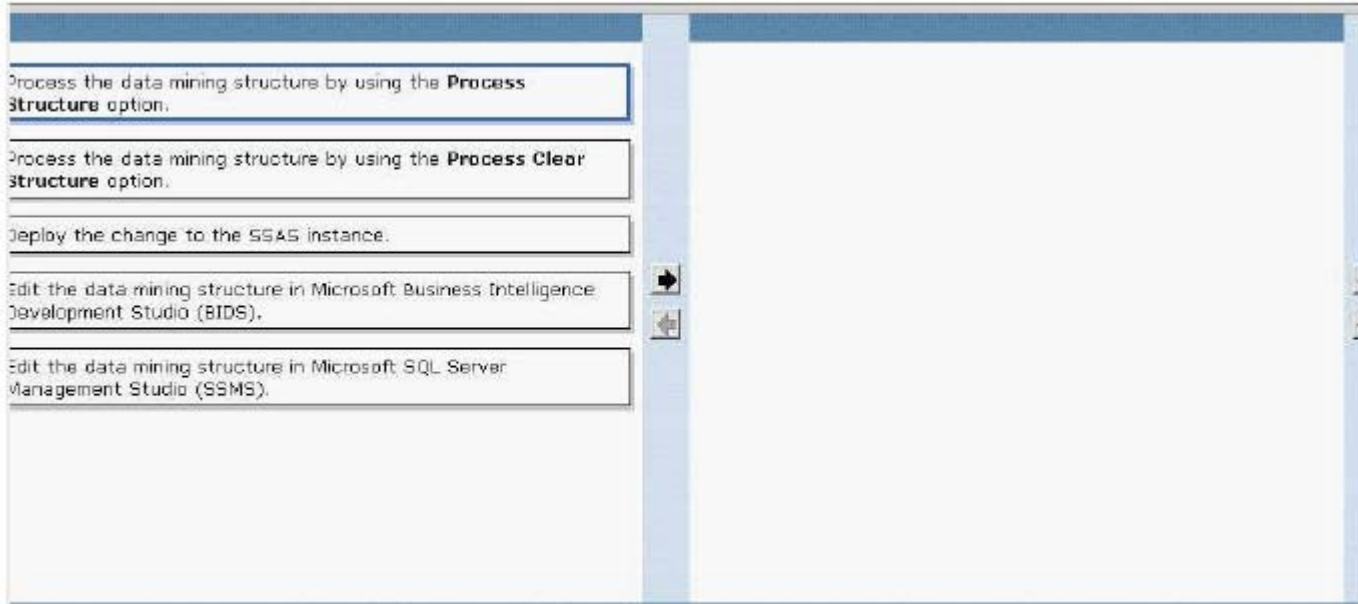

Answer:

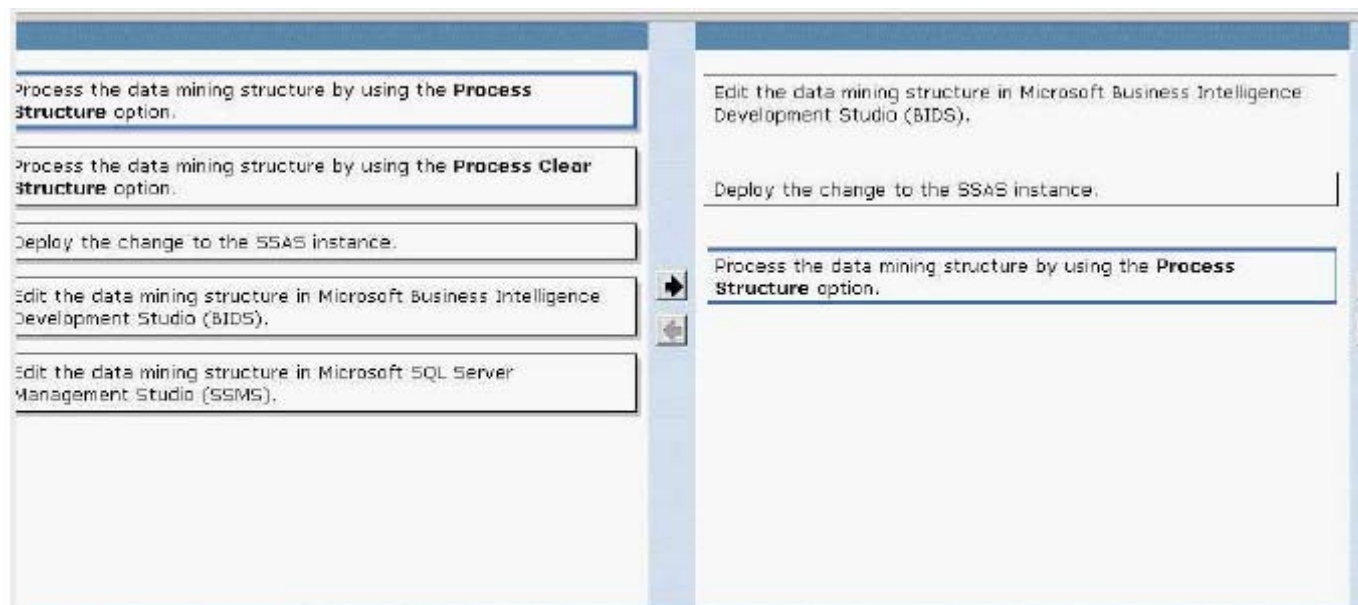

Question: 64

You are designing a Microsoft SQL Server 2005 Analysis Services (SSAS) solution. The SSAS database includes a data mining model that uses the Microsoft Neural Network algorithm. You use Prediction Query Builder in Microsoft SQL Server Management Studio (SSMS) to build the Data Mining Extensions (DMX) queries for the database. You need to write a query that returns the number of cases in the data mining model and the percentage of the sample cases that fit the model. Which Prediction Query Builder field configuration should you use?

- A - A PredictAssociation field that uses a Prediction Function source.
- B - A PredictHistogram field that uses a Prediction Function source.
- C - A PredictAssociation field that uses the data mining model source.

D - A PredictHistogram field that uses the data mining model source.

Answer: B

Question: 65

You are designing a data mining structure for a Microsoft SQL Server 2005 Analysis Services (SSAS) solution. The solution requires the use of relational data. You need to design the data mining structure so that the data mining models can use the data from a case table and a nested table. What should you do?

- A - Set the case table column as a key.
- B - Set the nested table column as a key.
- C - Set the case table column as a key and an input, and then set the nested table column as a key.
- D - Set the case table column as a key, and then set the nested table column as both a key and an input.

Answer: B

Question: 66

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) solution. A database named Call Center Metrics contains a data mining structure named Call Center Forecasting. The data mining structure implements the Microsoft Neural Network mining model and the Microsoft Clustering-based mining model. You need to change the parameters for both the mining models to narrow the number of rows that are returned from Microsoft Mining Content Viewer. What should you do?

- A - Increase the MAXIMUM_STATES parameter for each mining model.
- B - Decrease the MAXIMUM_STATES parameter for each mining model.
- C - Increase the SAMPLE_SIZE parameter for each mining model.
- D - Decrease the SAMPLE_SIZE parameter for each mining model.

Answer: B

Question: 67

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project. Your data source view has a table named Products. The Products table contains the following three columns:

ProductKey

Cost

Discount

The table also contains a named calculation column named PercentageCost.

You need to add another column named DiscountedCost that will display the value of $\text{CosrDiscount}/100$.

What should you do?

- A - Create a named calculation column named DiscountedCost with the following expression: $\text{CosrDiscount}/100$
- B - Create a named calculation column named DiscountedCost with the following expression: $\text{Select CosrDiscount}/100$ from Products
- C - Convert the table to a named query with the following query definition: $\text{Select ProductKey, Cost, Discount, PercentageCost, CosrDiscount}/100$ as DiscountedCost from Products.
- D - Convert the table to a named query with the following query definition: $\text{Select ProductKey, Cost, Discount, PercentageCost}$ from Products. Add a named calculation column named DiscountedCost with the following expression: $\text{Select CosrDiscount}/100$

Answer: A

Question: 68

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project. The cube must store details of the data in a relational format and the aggregations in a multidimensional format. Which of the predefined Proactive Caching values property should you use?

- A - Real-time ROLAP
- B - Real-time HOLAP
- C - Automatic MOLAP
- D - Scheduled MOLAP

Answer: B

Question: 69

You are designing a Microsoft SQL Server 2005 Analysis Services (SSAS) project.

You create a dimension named DimProducts that contains the following features:

An attribute named Categories.

A key attribute named Products that has a relationship to the Categories attribute.

A hierarchy that has the Categories attribute on the first level and the Products attribute on the second level.

When you browse through the dimension, it shows all the Products that do not have a relationship to the Categories attribute. The attribute is grouped under a Categories member named Unknown.

You need to ensure that only those products that have a relationship to the Categories attribute are displayed.

What should you do?

- A - In the hierarchy, change the HideMemberIf property of the Categories level to OnlyChildWithNoName.
- B - In the hierarchy, change the HideMemberIf property of the Products level to OnlyChildWithNoName.
- C - Change the UnKnownMember property of the DimProducts dimension to None.
- D - Change the UnKnownMember property of the DimProducts dimension to Hidden.

Answer: D

Question: 70


You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project. You create a cube named FinalAccounts.

The cube contains the following objects:

A measure named Balance under a measure group named Finance.

A dimension named DimAccount that contains an attribute named Account. The attribute contains two members named Operation Expense and Gross Margin.

A calculated member and named sets as shown in the following exhibit.

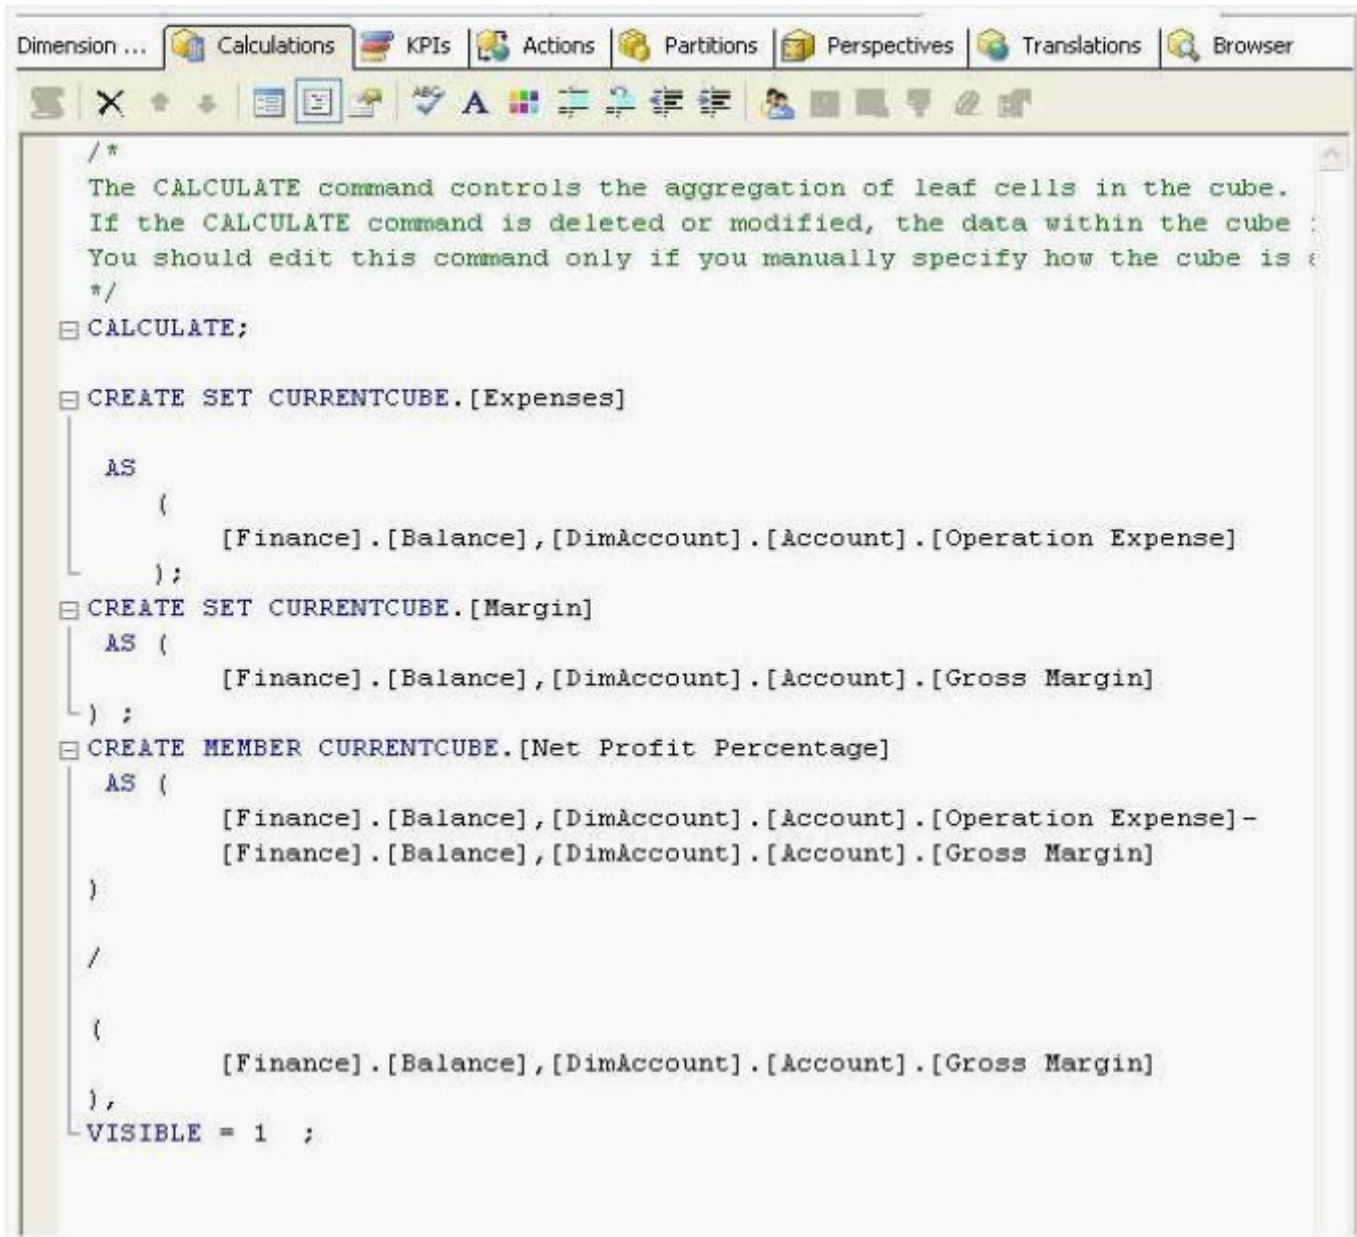

You create a Key Performance Indicator (KPI) by using a Gauge status indicator that calculates the ratio between the two attribute members. If the Operation Expense member is greater than the Gross Margin balance member, the Operation Expense member is in poor status. You need to type the Multidimensional Expressions (MDX) expression for the Status expression of the KPI.

Which MDX expression should you use?

A - IIF
 (
 [Measures].[Expenses]
 <=
 [Measures].[Margin]
 ,
 [Measures].[Expenses]
 /

```

[Measures].[Margin]
[Measures] [Net Profit Percentage]*-1
)
B - IIF
(
[Measures].[Expenses]
<=
[Measures].[ Margin]
,
[Measures].[Expenses]
/
[Measures].[Margin]
,
[Measures].[Net Profit Percentage]
)
C - IIF
(
[Measures] [Expenses]
>=
[Measures].[ Margin]
,
[Measures].[Expenses]
/
[Measures].[ Margin]
[Measures].[Net Profit Percentage]*-1
)
D - IIF
(
[Measures].[Expenses]
>=
[Measures].[Margin]
,
[Measures].[Expenses]
/
[Measures].[Margin]
[Measures].[Net Profit Percentage]
)

```

Answer: A

Question: 71

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project.

Your data source has the following tables:

Scenarios table that contains columns named Scenario Key and ScenarioName.

Fact Finance table that contains a foreign key column named ScenarioKey.

You need to create a calculated column in a data source view named ScenarioCalc in the FactFinance table to display the ScenarioName.

Which expression should you use?

- A - Select ScenarioName as ScenarioCalc where ScenarioKey=FactFinance.ScenarioKey
- B - (Select ScenarioName from Scenarios where ScenarioKey=Scenarios.ScenarioKey)
- C - (Select ScenarioName from Scenarios where ScenarioKey=FactFinance.ScenarioKey)
- D - ScenarioCalc=Select ScenarioName from Scenarios where ScenarioKey=FactFinance.ScenarioKey

Answer: C

Question: 72

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project. You create a cube that uses a dimension named DimProducts. The DimProducts dimension contains the following features:

- An attribute named Product.
- A column named ProductEnglishName for the English name of the product.
- A column named ProductFrenchName for the French name of the product.

The NameColumn property of the Product attribute is set to the ProductEnglishName column. The language property of the cube is set to French. You need to ensure that the cube displays the product names in French when you browse through the cube from a client that uses the fr-FR locale.

What should you do?

- A - Create a new translation for the dimension and select the ProductFrenchName column as the translation column for the Product attribute.
- B - Create a new translation for the dimension and set the value "ProductFrenchName" for the translated caption of the Product attribute.
- C - Create a new translation for the cube and set the value "ProductFrenchName" for the caption of the DimProducts dimension.
- D - Set the NameColumn property of the Product attribute to the ProductFrenchName column.

Answer: A

Question: 73

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project. The project has the following objects:

- A cube named SalesData for a database named SalesDB.
- Two dimensions named Region and Gender.
- A role named Employee that has the Read permission set for the cube.

You need to modify the Employee role definition to allow the SalesData cube to be browsed only by using the Region dimension.

Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A - Set the inherit permission to true for the Gender dimension under the SalesData cube.
- B - Set the inherit permission to false for the Gender dimension under the SalesData cube.
- C - In Dimension data, select the Gender dimension under SalesData and clear all the listed attributes.
- D - In Dimension data, select the Gender dimension under SalesDB and clear all the listed attributes.

Answer: A, B, C

Question: 74

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project. The project consists of a cube that contains the following objects:

- A time dimension named DimTime that contains a hierarchy named Calendar. The first level of the hierarchy is named Year and the second level is named Quarter.
- A dimension named DimProduct.
- A fact table named FactInventory that stores the daily stock-in-hand measure for each product.

You need to set the Aggregate Function property to ensure that the cube displays the stock-in-hand measure for each product at the end of each quarter.

Which value should you use?

- A - LastNonEmpty
- B - FirstNonEmpty

- C - Count
- D - Sum

Answer: A

Question: 75

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project. You create a cube that uses a dimension named Product. The Product dimension contains an attribute named ProductName. You also create a URL action and set the action expression to "http://mycompany.com/ProductInfo.aspx?Product="+Product.ProductName.CurrentMember.Name

You need to set the action target properties for the URL action. What should you do?

- A - Set the target type to Attribute Members and the target object to Product.ProductName.
- B - Set the target type to Attribute Members and the target object to Product.
- C - Set the target type to Dimension Members and the target object to Product.
- D - Set the target type to cube and the target object to Current Cube

Answer: A

Question: 76

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) project.

You have a cube named SalesCube that contains the following objects:

A measure group named Sales that contains a measure named Internet Sales Amount.

A dimension named DimProduct that contains a hierarchy named Product Category. The hierarchy contains the Category attribute on the first level, the Subcategory attribute on the second level, and the Product attribute on the third level.

You need to write a Multidimensional Expressions (MDX) query that displays only the product names and the Internet sales amount for each product.

Which query should you use?

- A - select [Sales].[Internet Sales Amount] on columns,[DimProduct].[Product Category].[Product].members on rowsfrom [SalesCube];
- B - select [Sales].[Internet Sales Amount] on columns,[DimProduct].[Product Category].[Subcategory].members on rowsfrom [SalesCube];
- C - select [Sales].[Internet Sales Amount] on columns,[DimProduct].[Product Category].members on rowsfrom [SalesCube];
- D - select [Sales].[Internet Sales Amount] on columns,[DimProduct].[Product Category].&[3] on rowsfrom [SalesCube];

Answer: A

Question: 77

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. The package is connected to a database on your development server by using a connection manager. You decide to use the DTEXecUI utility to run the package. You need to change the connection of the connection manager to a different server at run time without using a package configuration file. What should you do?

- A - Specify an appropriate command file by using the Command Files dialog box.
- B - Specify an appropriate Connection String variable in the Set Values dialog box.
- C - Specify an appropriate package configuration by using the Configurations dialog box.
- D - Specify a different connection string for the connection manager by using the Connection Manager dialog box.

Answer: D

Question: 78

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. The package must be deployed on 10 servers. You do not have access to the file system on any of these 10 servers. You need to set different package configuration properties at the package run time. What should you do?

- A - Create an XML configuration file. Select the XML configuration type in the SSIS Package Configurations Organizer.
- B - Create a batch file that uses the dtutil utility program to set the package configuration properties while the package deploys into production.
- C - Use the SSIS Package Configuration Wizard to create a SQL Server Configuration type. Select a centralized Microsoft SQL Server to store the package configuration properties.
- D - Create a .REG file that contains entries for each of the configuration properties. Select a single Registry Configuration type in the SSIS Package Configurations Organizer.

Answer: C

Question: 79

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. The package is named UpdateTable.dtsx and contains a variable named runID. The package must run by using the dtexec utility. The runID variable must be set at runtime to a value of 5. You need to meet the outlined requirements. What should you do?

- A - Execute dtexec /F "c:\ssisPackages\UpdateTable.dtsx" /SET \packages.variables[runID].Value;5.
- B - Execute dtexec /F "c:\ssisPackages\UpdateTable.dtsx" /SET \packages.variables.runID=5.
- C - Create a text file that specifies the variable name and value in the format package .variables[runID] Value = 5. Execute dtexec" /F "c:\ssisPackages\UpdateTable.dtsx" /COM <filename> where <filename> is the name of the file you just created.
- D - Create a text file that specifies the variable name and value in the format runID=5. Execute dtexec /F "c:\ssisPackages\UpdateTable.dtsx" /COM <filename> where <filename> is the name of the text file you just created.

Answer: A

Question: 80


You create a Microsoft SQL Server 2005 Integration Services (SSIS) project by using Business Intelligence Development Studio (BIDS). The project contains 75 SSIS packages stored in the file system that perform various maintenance tasks. The SSIS packages must be available to the Quality Assurance (QA) team to test the packages on the test server. You need to create a package deployment utility that allows the QA team to deploy each of these packages on the test server. Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A - Add a SQL Server Import/Export Wizard item to the SSIS project.
- B - Ensure that the InteractiveMode SSIS project property is set to false.
- C - Ensure that the CreateDeploymentUtility SSIS project property is set to true.
- D - Ensure that the SSIS Project Active Build configuration is set to Development.
- E - Build the entire SSIS project and copy the contents of the \bin\Deployment folder from your server to the QA server.


Answer: C, E

Question: 81

You create a Microsoft SQL Server 2005 Integration Services (SSIS) package. The package must be deployed to a file on a remote Microsoft SQL Server 2005 database server. The user, who deploys the package, does not have access to the file system on your server. You need to ensure that the user, when ready, can deploy the package without your assistance. What should you do?

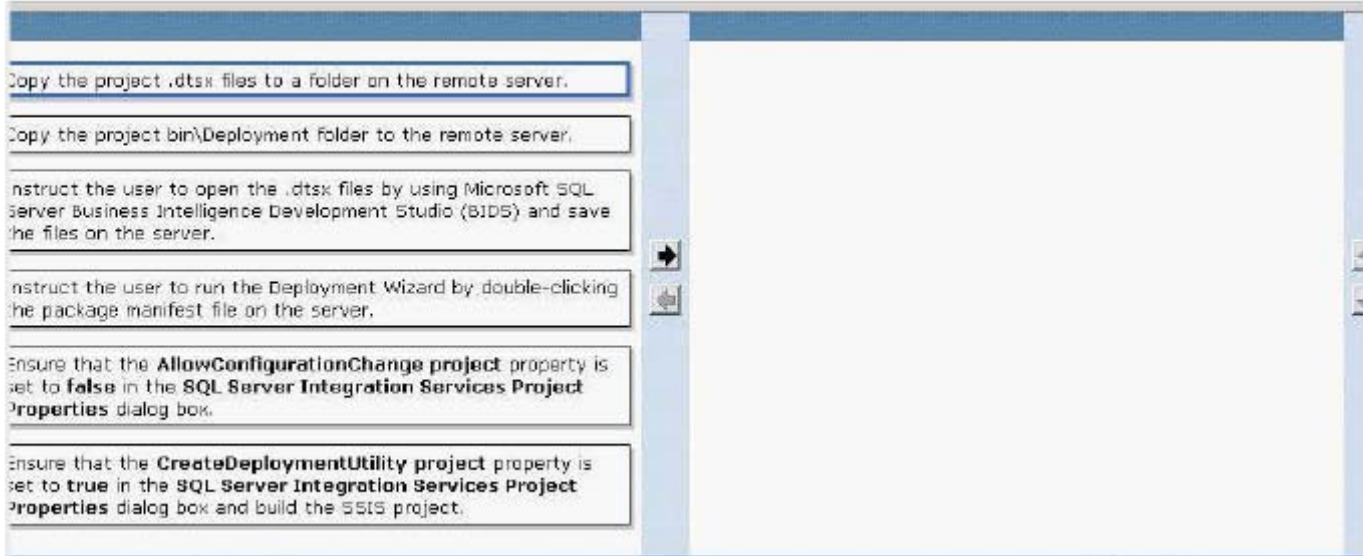

Answer:

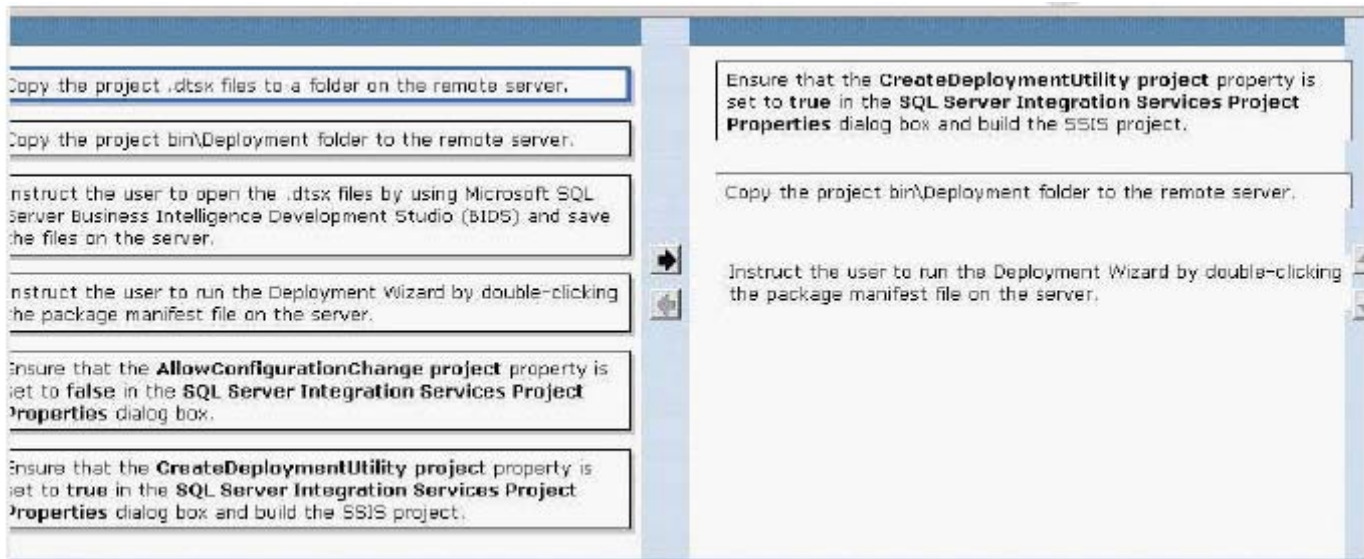

Question: 82

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. A task processes rows of data from a table in the package. You decide to log the number of processed rows to Windows Event Log. You need to set a logging property on the task to ensure that the number of processed rows is logged each time the package runs. Which property should you use?

A - OnPostExecute

- B - OnPipelinePowsSent
- C - OnPipelineExecutionPlan
- D - OnPipelinePostPrimeOutput

Answer: B

Question: 83

You have designed and saved 35 Microsoft SQL Server 2005 Integration Services (SSIS) packages. The packages are stored in a single folder on the network. All the team members can view the packages but not the property values. You need to ensure that the property values are password protected. What should you do?

- A - Use a batch file that runs the dtutil program to set the PackageProtectionLevel property to EncryptSensitiveWithPassword on each of the SSIS packages you have created.
- B - Use a batch file that runs the dtutil program to set the PackageProtectionLevel property to ServerStorage on each of the SSIS packages you have created.
- C - Use the SSIS package designer to set the PackageProtectionLevel property to EncryptAllWithUserKey on each of the previously saved packages.
- D - Use the SSIS package designer to set the PackageProtectionLevel property to EncryptSensitiveWithUserKey on each of the previously saved packages.

Answer: A

Question: 84

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. The report dataset consists of a WHERE clause: WHERE machineID IN (@machineID). The values in the machineID column change constantly. When the report is run, users must be prompted to use a list of valid values for the @machineID parameter. When the report is run, a list of valid values for the @machineID parameter must be made available to populate the @machineID dataset parameter. You need to create a Multi-value report parameter that will meet the requirement. What should you do?

- A - Select an appropriate default value from a dataset query.
- B - Select an appropriate available value from a dataset query.
- C - Select the Internal check box, and then select an appropriate default value from a dataset query.
- D - Select the Internal check box, and then select an appropriate available value from a dataset query.

Answer: B

Question: 85

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report.

The report must meet the following specifications:

When the report is run from a Helpdesk application, the report toolbar must not be displayed

When the report is run from an Intranet Portal application, the report toolbar must display the list of parameters only on the request of the user. You need to provide the report URL for each application.

Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A - For the Helpdesk application, include "Toolbar=false" in the URL.
- B - For the Helpdesk application, include "rc:Toolbar=false" in the URL.
- C - For the Helpdesk application, include "rs:Toolbar=false" in the URL.
- D - For the Intranet Portal application, include "Parameters = Collapsed" in the URL.

E - For the Intranet Portal application, include "rc:Parameters = Collapsed" in the URL.
F - For the Intranet Portal application, include "rs:Parameters = Collapsed" in the URL.

Answer: B, E

Question: 86

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. The source of the SSRS report data is a Transact-SQL stored procedure. The procedure does not have any input parameters and returns all records in a set of tables. Three other applications that run on Microsoft SQL Server also use the stored procedure. You need to limit the amount of data that is displayed on the report without affecting any other applications that use the stored procedure. What should you do?

- A - Run the Database Engine Tuning Advisor tool in the database.
- B - Create a dataset filter and include the appropriate limiting expression.
- C - Create a Report Parameter dialog box and include the appropriate limiting expression.
- D - Add an expression to the Visibility property and include the appropriate limiting expression.

Answer: B

Question: 87

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) matrix report. You use the SSRS Report Wizard to create the report. The report is based on a Microsoft SQL Server 2005 Analysis Services (SSAS) dataset. The dataset consists of a single measure named Total Sales, and two dimension attributes named Store Name and Month. You need to drag the Total Sales measure to a report section to display a table with values for Total Sales for each month. Which report section should you use?

- A - Rows
- B - Page
- C - Details
- D - Columns

Answer: C

Question: 88

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. The report uses a dataset that calls a Microsoft SQL Server stored procedure. The stored procedure requires three input parameters that cannot be Null. The report must meet the following requirements when it runs:
Each of the stored procedure input parameters must be used.
All parameter values must be selected from the drop-down lists.
Only valid values must be used for input parameters.
You need to set the Report Parameters dialog box configurations to meet the outlined requirements.
Which three tasks should you perform? (Each correct answer presents part of the solution. Choose three.)

- A - For each input parameter, ensure that the Internal check box is selected in the Report Parameters dialog box.
- B - For each input parameter, ensure that the Default Values property is set to Null in the Report Parameters dialog box.
- C - Add a dataset to the report that has fields that map to the valid values for each of the input parameters of the existing dataset.
- D - Add a TextBox item to the report for each of the stored procedure parameters. Set the Value

property to an appropriate field in the dataset.

E - Add a List item to the report for each of the stored procedure parameters. Set the DataSet property to a dataset that contains the valid values for the parameter.

F - For each input parameter, ensure that the Available Values property is set to From Query. Ensure that a valid field is specified in the Value field of the Report Parameters dialog box.

Answer: B, C, F

Question: 89

You administer a Microsoft SQL Server 2005 Reporting Services (SSRS) instance. You have remote access to e-mail and HTTP only. A user must create a report based on a Microsoft SQL Server 2005 Analysis Services (SSAS) cube. No report model is currently available for the cube. The user can access the cube through the Microsoft Office Excel application and is a member of the System User role. You need to help the user create a report by using the SSRS Report Builder utility. What should you do?

A - Connect to the SSRS Report Manager and create a Report Model.

B - Instruct the user to create a Report Model by using the SSRS Report Manager.

C - Create a Report Model offline and e-mail the model file to the user with instructions for importing the model.

D - Instruct the user to create a Report Model by using Microsoft SQL Server Business Intelligence Development Studio (BIDS).

Answer: A

Question: 90

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. The report has a column of data that must be displayed and printed by using a strikethrough text. You need to modify the appropriate property of a text field to represent the proper text formatting. What should you do?

A - Set the BorderStyle Left property to OutSet.

B - Set the TextDecoration property to LineThrough.

C - Set the BorderStyle Top property to WindowInset.

D - Use a custom formatting string in the Format string property.

Answer: B

Question: 91

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) accounting report. Every other line of output in the report table must have a green background. You need to use the appropriate expression for the BackgroundColor property of the table. Which expression should you use?

A - =Iif((RowNumber("Odd")), "Green", "White")

B - =Iif((RowNumber(Nothing)), "Green", "White")

C - =Iif((RowNumber(Nothing) MOD 2), "Green", "White")

D - =Iif((RowNumber(InScope("Odd"))), "Green", "White")

Answer: C

Question: 92

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. The report has three columns in a table. The columns are named MachineName, MachineMfr, and MachineModel. The report navigation options must allow users to click on a row from the

MachineName column and drill through to another report, and then pass the contents of the MachineName column as a parameter named MachineName. You need to configure the report navigation options to satisfy the user requirements. Which three tasks should you perform? (Each correct answer presents part of the solution. Choose three.)

- A - On the General tab, select the data region.
- B - On the Visibility tab, select the expression for the report item.
- C - On the Navigation tab, select the report for the Hyperlink action.
- D - On the Navigation tab, select the bookmark for the Hyperlink action.
- E - On the Navigation tab, add an expression to the Hyperlink action parameters.
- F - On the Navigation tab, add the name and the value to the Hyperlink action parameters.

Answer: D, E, F

Question: 93

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. The execution of the report must trigger an event for Notification Services by using a custom assembly. You need to write a custom code function named RSNotify that will parse the data from a field named ProductValue and execute the custom assembly within the report. Which three tasks should you perform? (Each correct answer presents part of the solution. Choose three.)

- A - Add a reference to the custom assembly on the Code tab of the Report Properties dialog box.
- B - Add the RSNotify function to the Custom code field on the Code tab of the Report Properties dialog box.
- C - Call the code in an expression by using the following format: =Code.RSNotify(Fields!ProductValue.Value)
- D - Call the code in an expression by using the following format
=Report.Parameters!Code(RSNotify(Fields!ProductValue.Value))
- E - Add a parameter to the Report Parameters dialog box to reference the custom assembly that contains the RSNotify function.
- F - Add a reference to the custom assembly in the Assembly name field on the References tab of the Report Properties dialog box.

Answer: A, C, F

Question: 94

You are designing a Microsoft SQL Server 2005 Reporting Services (SSRS) report. The report uses a dataset that is based on a Data Mining Extensions (DMX) prediction query. The query forecasts the probability of purchases for buyers when specific inputs are given. Users want to select the values at runtime that might be used to forecast the probability of a purchase. You need to implement two report parameters named buyer and probability that will be used to control the DMX query at report runtime. Which DMX WHERE clause should you use?

- A - WHERE Buyer = @buyer AND (PredictProbability([Buyer])) > probability
- B - WHERE (Predict([Buyer])) = buyer AND Probability > probability
- C - WHERE (Predict([Buyer])) = buyer AND (PredictProbability(Buyer)) > probability
- D - WHERE (Predict([Probability])) > probability AND Buyer = buyer

Answer: C

Question: 95

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. The package contains a Data Flow task with a Fuzzy Grouping transformation that creates data. The output of the Fuzzy Grouping transformation is incorrect. You need to view the output data of the

Fuzzy Grouping transformation to debug the package. What should you do?

- A - Add a Data Viewer object to the Data Flow task for constraints on the Fuzzy Grouping transformation.
- B - Add a Failure constraint to the Control Flow task after the Data Flow task that contains the Fuzzy Grouping transformation.
- C - Add a Data Flow task to the Control Flow task preceding the Data Flow task that contains the Fuzzy Grouping transformation to show the input data.
- D - Add a Failure constraint from the Data Flow task that contains the Fuzzy Grouping transformation to a new Data Flow task that exports the results.

Answer: A

Question: 96

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. The package contains 20 Data Flow tasks. After executing the package, you notice an unexpected distribution of values in a table. You need to generate a histogram and view the histogram after each transformation. What should you do?

- A - Use Microsoft Business Intelligence Development Studio (BIDS) to open the package. Use the Data Flow tab to add a data viewer to each Data Flow path.
- B - Use Microsoft Business Intelligence Development Studio (BIDS) to open the package. Use the Package Configurations Organizer to add the data viewer to a configuration file for each Data Flow task.
- C - Use the Package Migration Wizard to open the package. Create a configuration file that contains elements for each data viewer configuration. Edit the properties of the package to use the configuration file for each Data Flow task.
- D - Use the Execute Package Utility to run the package. Create a configuration file that contains elements for each data viewer configuration. Add the /ConfigFile parameter, followed by the name of the configuration file, to the Command Line property of the package.

Answer: A

Question: 97

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. The package uses at least one sequence container in one transaction. Each transaction controls a Data Flow task and a Control Flow task. Each Data Flow task has a Success constraint. The Control Flow task follows the Success constraint. The package must include the following requirements:
Each Data Flow task must use its own transaction.
The Control Flow task and the Data Flow task that precedes it must succeed or fail as an atomic unit.
A restart point must restart each Data Flow task and the Control Flow task that follows it as an atomic unit.
You need to make changes in the control flow designer to meet the outlined requirements. Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A - Add all the Data Flow tasks and the Control Flow tasks to one sequence container.
- B - Add a sequence container for each Control Flow task and the Data Flow task that precedes it.
- C - Change the FailPackageonFailure property to true for each new sequence container that is added to the package.
- D - Change the FailPackageonFailure property to false for each new sequence container that is added to the package.

Answer: B, C

Question: 98

You create a package by using 47 Execute SQL Control Flow tasks. The Execute SQL task returns an error during a calculation of a percentage change over time. You need to add an event handler to the package that processes all of the messages that are returned from each task. Which event handler should you use?

- A - OnError
- B - OnWarning
- C - OnTaskFailed
- D - OnQueryCancel
- E - OnExecStatusChanged

Answer: E

Question: 99

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. The package contains a Data Flow task that references a CustomerHistory table. The Data Flow task raises errors when the CustomerHistory table is not available. You need to edit a property in the Data Flow task to avoid errors in the development of the package and to permit the execution of the package. What should you do?

- A - Set the DelayValidation property to true.
- B - Set the DelayValidation property to false.
- C - Set the DisableEventHandlers property to true.
- D - Set the DisableEventHandlers property to false.

Answer: A

Question: 100

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. The package includes five Data Flow tasks and three Control Flow tasks. You need to modify the package so that two Control Flow tasks and one Data Flow task fail or succeed as a unit. What should you do?

- A - Change the TransactionOption property of each of the two Control Flow tasks and one Data Flow Task to Supported.
- B - Change the TransactionOption property of each of the two Control Flow tasks and one Data Flow task to Required.
- C - Add the two Control Flow tasks and one Data Flow task to a container. Change the TransactionOption property of the container to Required.
- D - Add the two Control Flow tasks and one Data Flow task to a container. Change the TransactionOption property of the container to Supported.

Answer: C

Question: 101

You are designing a Microsoft SQL Server 2005 Integration Services (SSIS) package. The OLE DB data source for the package is a database that is updated frequently. You need to create a package that accomplishes the following tasks:
Implement the IPowsetFastLoad interlace.

Support various data flow destinations.

Which two actions should you perform? (Each correct answer presents part of the solution. Choose two.)

- A - Use an OLE DB data flow destination.
- B - Use a Recordset data flow destination.
- C - Use a DataReader data flow destination.
- D - Create separate data flow destinations within the same Data Flow task.

Answer: A, D

Question: 102

You are managing a Microsoft SQL Server 2005 Analysis Services (SSAS) instance. You notice unusually high CPU utilization in the msmdsrv.exe every day during business hours. You need to identify the source of the high CPU utilization without requiring user interaction to stop and start traces. What should you do?

- A - Use Database Engine Tuning Advisor.
- B - Examine the Connection object from System Monitor.
- C - Configure a scheduled task that launches Microsoft SQL Server Profiler as a command-line utility.
- D - Configure the SSAS instance to log queries for future use by using the Usage-Based Optimization Wizard.

Answer: C

Question: 103

You are managing a Microsoft SQL Server 2005 Analysis Services (SSAS) instance. You have a cube in an SSAS instance. You notice that the queries run slowly. You need to identify the queries that run slowly and change the storage configuration of the cube. What should you do?

- A - Run the Cube Storage Wizard to analyze and design aggregations.
- B - Run the Usage-Based Optimization Wizard to analyze and design aggregations.
- C - Use SQL Profiler to examine the execution plans to analyze and design aggregations.
- D - Modify the Data Source Impersonation Info property of the Analysis Services database.

Answer: B

Question: 104

You are managing a Microsoft SQL Server 2005 Analysis Services (SSAS) instance. You have a machine named COMPANYCUBE for a SSAS instance. The COMPANYCUBE machine hosts a SSAS database that has a cube named HR. You need to restrict the local administrators from accessing any data stored in the HR cube. What should you do?

- A - Remove all the local administrators from the membership in the server role.
- B - Change the Security\BuiltInAdminsareServerAdmins property of the SSAS instance to false.
- C - Create a role called AdminRole. Set the Access to the HR cube to None. Add the local administrators to the role.
- D - Remove the local administrators from the SQLServer2005MSOLAPUser\$COMPANYCUBE\$MSSQLSERVER local group.

Answer: B

Question: 105

Your server hosts Microsoft SQL Server 2000 Analysis Services (SSAS) databases and cubes. You need to perform the migration of a database from Analysis Services 2000 to Analysis Services 2005. What should you do?

- A - Open a new SSAS project by using Business Intelligence Development Studio (BIDS). Rightclick

Project. Click the Add option, and then click the Existing Item option.

B - Use Business Intelligence Development Studio (BIDS) to create a Deployment script. Use the .configsettings tile to point to files copied from the Analysis Services 2000 instance.

C - Back up the Analysis Services 2000 database by using Enterprise Manager. Use Microsoft SQL Server Management Studio (SSMS) to restore the database to the SQL Server 2005 SSAS instance.

D - Connect to the SQL Server 2005 SSAS instance by using Microsoft SQL Server Management Studio (SSMS). Right-click Instance in Object Explorer, and then click the Migrate Database option.

Answer: D

Question: 106

You are developing a Microsoft SQL Server 2005 Analysis Services (SSAS) solution by using Business Intelligence Development Studio (BIDS). The SSAS instance runs under a local system account. A trust relationship exists between the machine that hosts the SSAS instance and the data source. You need to use the Impersonation Information dialog box to create a data source that SSAS can connect to when SSAS is deployed from any workstation. Which impersonation information should you use?

A - Default

B - Service account

C - Credentials of the current user

D - Specific user name and password

Answer: D